


Pile ground mounting system

Choose different U shape pile according to different ground.

Advantage

- High strength, anti-uv, high frequency insulation (Design standard: JIS C 8955: 2011, GB 50009-2012, IBC 2009, CBC 2010) ;
- Chemical resistance&weatherability (certificate: AS/NZS 1170, MCS, CSA etc) ;
- Max wind speed: 60m / s;
- Material: Al 6005-T5;
- Anti-corrosive: anodized;
- Warranty: 12 years;
- Duration: 25 years.

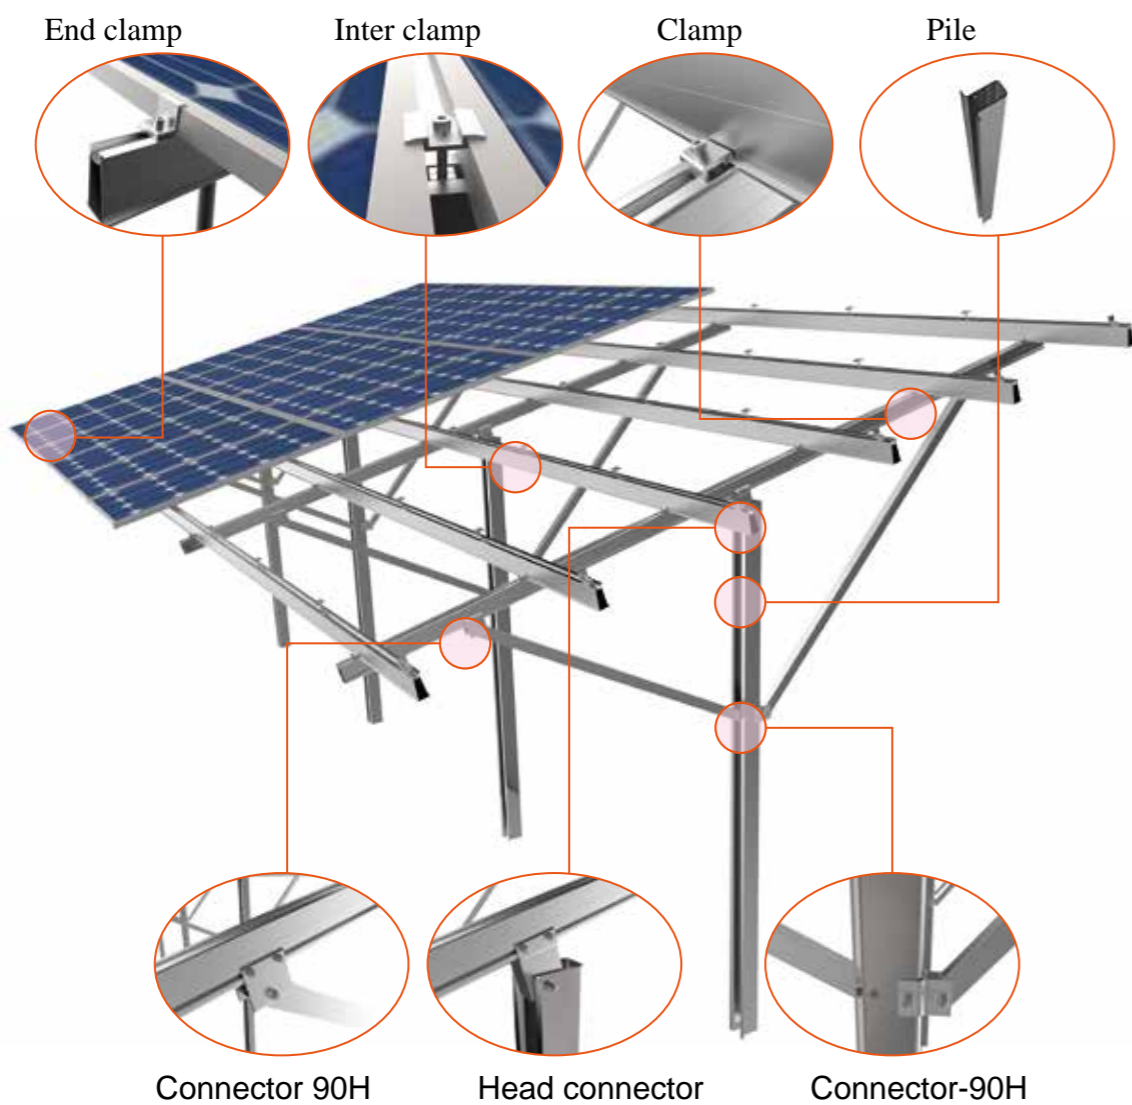

Slope ground mounting system

East-west direction and north-south direction both available.

Advantage

- High strength, anti-uv, high frequency insulation (Design standard: JIS C 8955: 2011, GB 50009-2012, IBC 2009, CBC 2010) ;
- Chemical resistance&weatherability (certificate: AS/NZS 1170, MCS, CSA etc) ;
- Max wind speed: 60m / s;
- Material: Al 6005-T5;
- Anti-corrosive: anodized;
- Warranty: 12 years;
- Duration: 25 years.

