



25 year
power output
warranty
M250W

Technical Parameters

Engineering Drawings
▼ (Front Side)

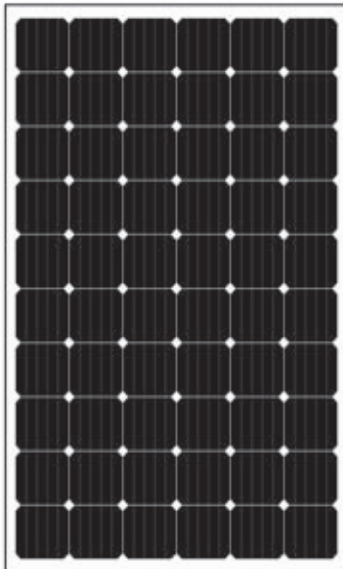

Engineering Drawings
▼ (Back Side)

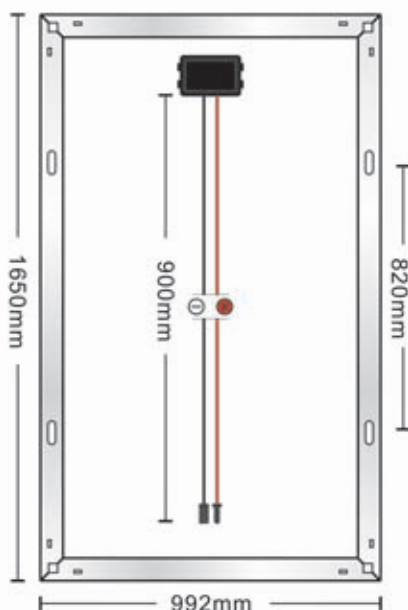

Electrica Parameters	Model	M250A60
Rated Maximum Power		250Wp
Power Tolerance		0~+5W
cell efficiency		17.6%
Maximum Power Voltage (Vmp)		29.80V
Maximum Power Current(Imp)		8.39A
Open Circuit Voltage(Voc)		36.80V
Short Circuit Current(Isc)		8.84A

Mechanical Parameters	
Dimensions	1650*992*40mm
weight	18.5Kg
Cell Technology	Mono-Si 156*156mm/6*10
Glass	3.2mm Tempered Glass
encapsulation	EVA
Backplane	Multilayer Composite
Aluminum-frame	Silvery Anodized Aluminium Alloy
Junction-box	IP65/IP67
Cable	4mm ² ,900mm
Connector	MC4 and Mc4 Compatible

Performance Parameters	
Maximum System Voltage	DC 1000V
Maximum Series Fuse Rating	15A
Operating Temperature	-45~+80°C
Temperature Coefficient of Isc	+0.06%
Temperature Coefficient of Voc	-0.32%
Temperature Coefficient of Pmp	-0.45%
Maximum Load(Wind/Snow)	2400Pa/5400Pa
Applications Class	Class A

Package Parameters	
Package Configuration	1pcs/CTN
Package Dimensions	1665*1007*50mm
Package Gross weight	20.5Kg

STC:irradiance 1000W/m², Cell Temperature 25°C, Spectrum AM:1.5

10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

