

# S7515 TL

137.036.350

# S15015 TL

131.446.350



## MAXIMUM EFFICIENCY

**98.9 %**

## OUTPUT VOLTAGE

**550 V<sub>AC</sub> ± 10%**

## MPPT VOLTAGE RANGE




**850 - 1.250V<sub>DC</sub>**

## Advantage

- > High efficiency, up to 99%.
- > Modular inverter (MPS system).
- > Elimination of machine down-times.
- > Easy maintenance.
- > Large lifetime.
- > Elevato rendimento fino al 99%.
- > Inverter modulari (sistema MPS).
- > Eliminazione dei fermi macchina.
- > Facilità nelle operatività di manutenzione.
- > Lunga durata dei componenti.

## Features


- > Use of a single magnetic component each module.
- > Advance modularity (according to IPCCM algorithm).
- > Continual monitoring of the system and integrated datalogger.
- > Outbound communication.
- > Impiego di un singolo componente magnetico per ciascun modulo.
- > Modularità all'avanguardia (secondo l'algoritmo IPCCM).
- > Supervisione continua del sistema e datalogger integrato.
- > Comunicazione verso il mondo esterno.

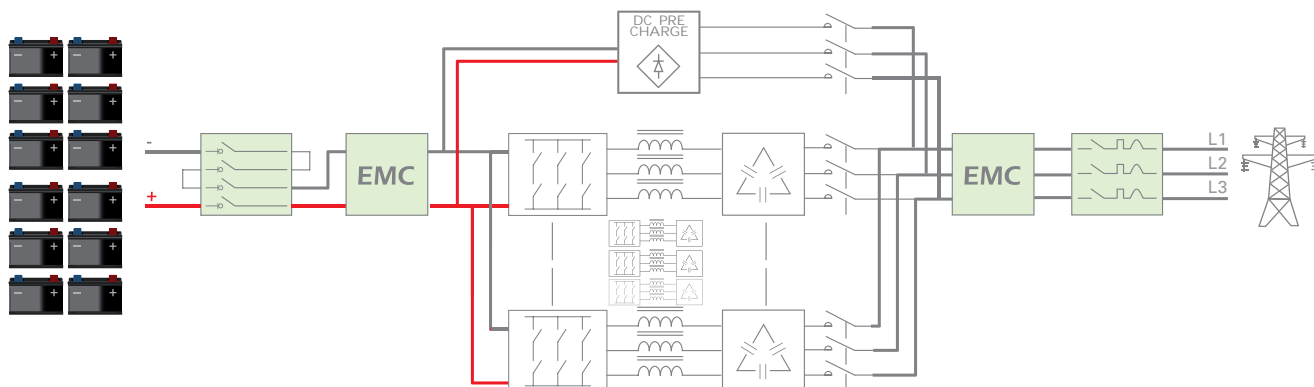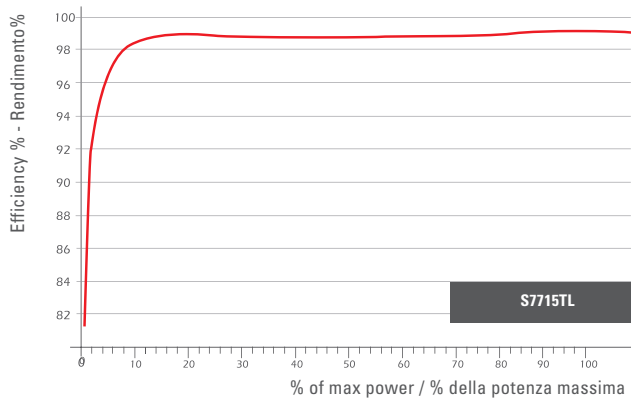

Note: Block diagram refers to the converter S7715TL  
Lo schema a blocchi si riferisce al convertitore S7715TL

# R7515 TL

# R15015 TL

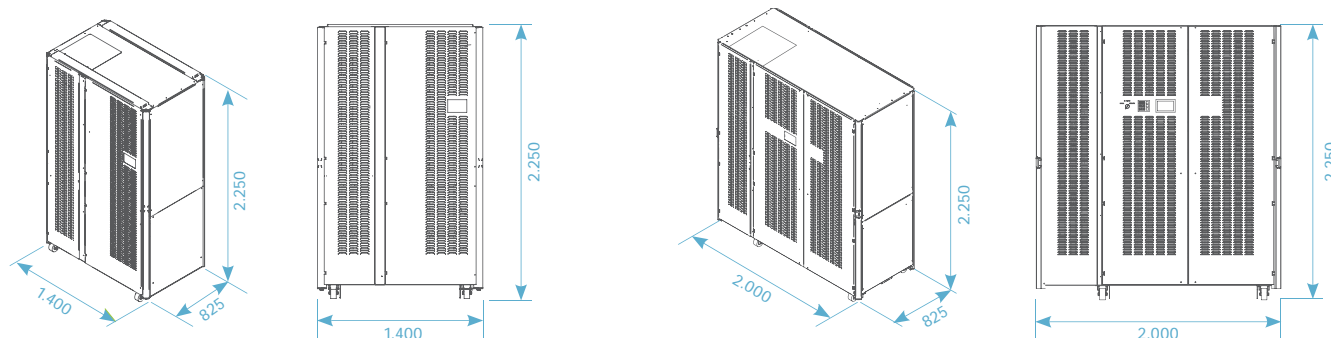

## DC Input - PV Module

Model	S7515 TL	S15015 TL
Battery voltage Range ( $V_{DC}$ )	850 – 1.250	850 – 1.250
Battery type	Li-ion, Lead, Ni-Cd, NaNiCl <sub>2</sub>	Li-ion, Lead, Ni-Cd, NaNiCl <sub>2</sub>
Absolute Maximum Voltage ( $V_{DC}$ )	<b>1.500 V</b>	<b>1.500 V</b>
Maximum input current ( $A_{DC}$ )	1.250 A	1.600 A
Voltage Ripple	<2%	<2%
Number of input max in parallel	4	4
Overvoltage Protection	SPD varistor device Class II (optional Class I+II)	SPD varistor device Class II (optional Class I+II)
DC input connection	DC Switch under load	DC Switch under load
Reverse Polarity Protection	Yes	Yes

## AC Output grid

Max Power (kW) (Note1)	<b>705 kW</b>	<b>1.410 kW</b>
Max Apparent Power (kVA)	705 kVA	1.410 kVA
Max Current ( $A_{AC}$ )	740 A	1.480 A
Max unbalance Current	< 2%	< 2%
Nominal Voltage ( $V_{AC}$ )	<b>550<sub>RMS</sub> ±10%</b>	<b>550<sub>RMS</sub> ±10%</b>
Frequency (Hz)	50 / 60	50 / 60
Nr Phase	3 (L1 – L2 – L3 – PE)	3 (L1 – L2 – L3 – PE)
Aux Supply (Normal Line) ( $V_{AC} - I_{AC}$ )	230Vac – 16A – 50/60Hz (L-N)	230Vac – 16A – 50/60Hz (L-N)
Aux Supply (Preferential Line) ( $V_{AC} - I_{AC}$ )	230Vac – 10A – 50/60Hz (L-N)	230Vac – 10A – 50/60Hz (L-N)
Distortion factor (THDi) (Note 2)	<3%	<3%
Power Factor (Note 3)	From 0 to 1 inductive or capacitive	From 0 to 1 inductive or capacitive
Galvanic insulation	No (Transformerless)	No (Transformerless)
AC input connection	Magneto-thermic Circuit Breaker (MCCB)	Magneto-thermic Circuit Breaker (MCCB)

## General Data

Max Efficiency	<b>98,9%</b>	<b>98,9%</b>
European Efficiency	98,6%	98,6%
Night consumption (W)	<60	<60
Weight (kg)	1.100	1600
Protection degree	IP20 (Opt. IP31)	IP20 (Opt. IP31)
Cooling	Air forced cooling fan speed controlled	Air forced cooling fan speed controlled
Air Flow	2.400 m <sup>3</sup> /h	4.800 m <sup>3</sup> /h
Maximum power dissipated in overload condition	12,5 kW - 10.705 Kcal/h	24,9 kW - 21.410 Kcal/h
Noise level (dBA)	70 dBA	70 dBA
Dimensions (H x L x P)	2250 x 1400 x 825	2.250 x 2.000 x 825
Operating temperature (°C)	- 10 ÷ +53	- 10 ÷ +53
Storage temperature (°C)	- 20 ÷ +60	- 20 ÷ +60
Humidity (Not condensing) (%)	0 ÷ 95	0 ÷ 95
Height above the sea without derating (Note 4)	1.500 m	1.500 m
Overvoltage Category	II	II
Color	RAL 9006	RAL 9006

Note 1: Valid at PF=1 and Vac nominal

Note 2: THDi is lower than 3% for inverter power greater than 25%.

Note 3: P-Q capability is circular.

Note 4: Above 1.500 m derate the Maximum Operating Temperature of 0.4 °C per 100 m up to 3.000 m a.s.l.

Note: Each inverter must be connected separately to its own LV/MV transformer or it has to be connected to a separate LV secondary input of the LV/MV transformer. Two or more inverters cannot be connected in parallel to the same LV secondary input of the LV/MV transformer.