


## DS-A18-130 Panels Specifications

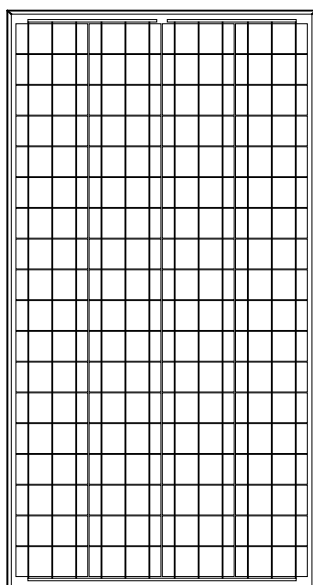

- Solar cells:** Polycrystalline solar cells
- Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE
- Front Side:** High-transmission 3.2mm tempered glass
- Back Side:** TPT /TPE
- Frame:** Clear anodized aluminum frame
- Output :** Junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Impp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A18-130	130	18.0	7.22	22.3	7.88	1390*665*35mm 54.7"*26.2"*1.38"	11.1

**Operation Temperature Range:** - 40℃~85℃


**NOCT:** 48℃±3℃

**Temperature coefficients of Im:** + 0.1 %/℃

**Temperature coefficients of Vm:** - 0.38 %/℃

**Maximum System Voltage:** DC600V

**STC:** 1000W/m<sup>2</sup>, 25℃, AM1.5

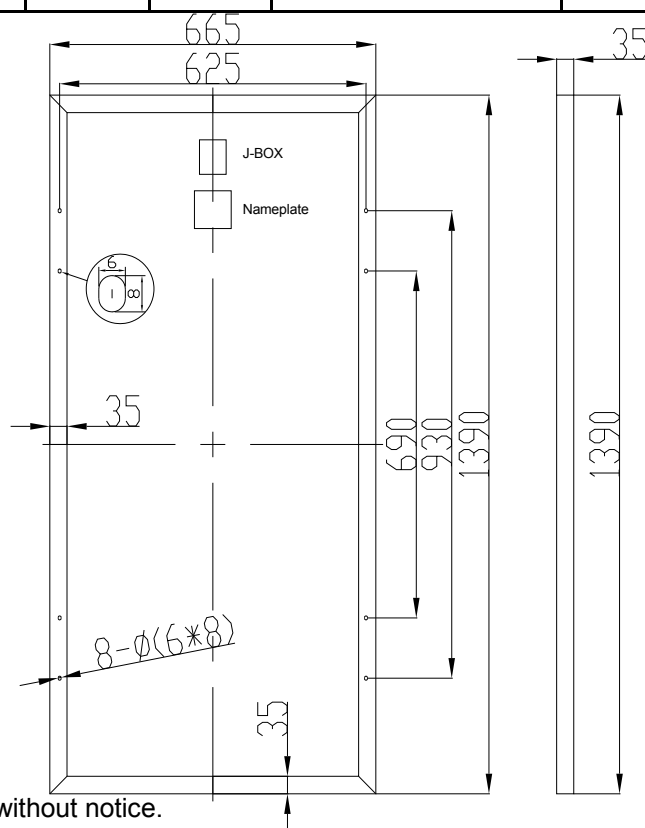

All the data of this sheet are subjected to change without notice.