








# Multi Busbar Monocrystalline Half Cell PV Module

## JY4MxxxH72(H)

Power Output	Power Tolerance	Maximum Efficiency
525-560W	0~+5W	21.9%


- 
 Assembled with multi-busbar cells , reduce shading effect on the energy generation, lower risk of hot spot
- 
 Pass the test for weather resistance in harsh environments (salt mist, ammonia corrosion and sand)
- 
 Excellent encapsulating materials and strict production process to ensure highly resistance against PID (Potential Induced Degradation) of PV module.
- 
 Lower oxygen and carbon content result in lower LID.
- 
 Series and parallel design, reduce the series resistance RS of module, reduce the loss of internal electrical performance, and improve the power generation capacity of whole system.
- 
 Cutting solar cell technology, which significantly reduces string current and module damage, it is good choice for projects in high temperature areas.

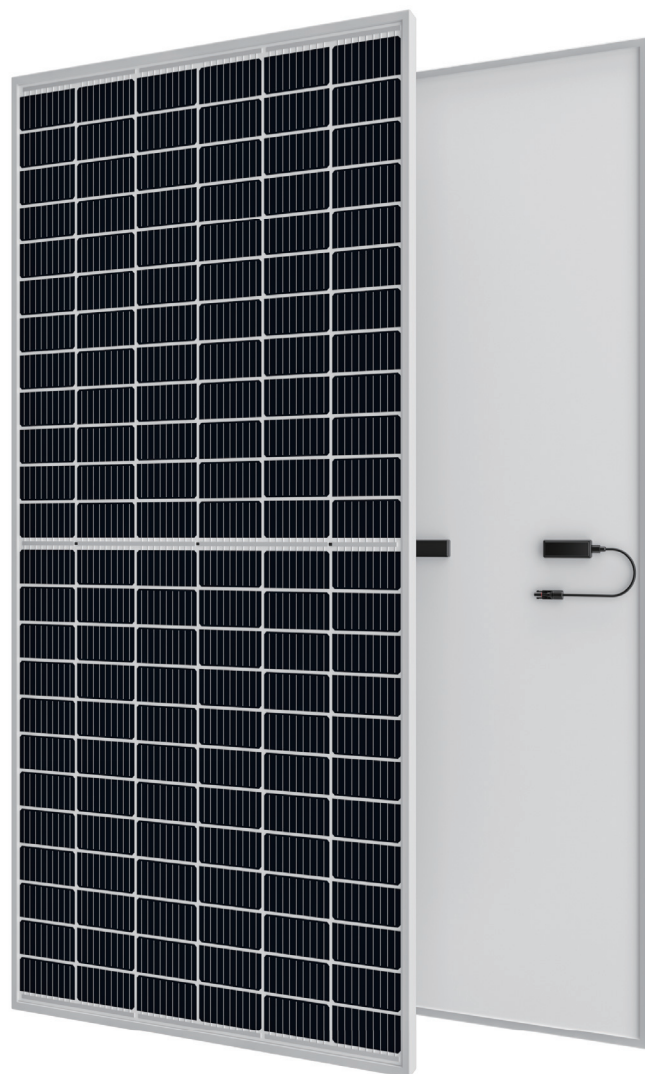

### Jinyuan Offers Long-term Quality Assurance

- 12 years Product Warranty
- 25 years Linear Power Output Warranty
- The attenuation of the power output in the first year  $\leq 2\%$ , the annual average attenuation after the first year  $\leq 0.55\%$

Jinyuan Linear Power Output Warranty Standard

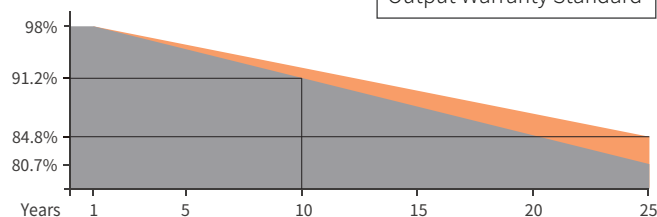

\* More details please read the guarantee letter.

### Product Certification & Management Certification

- IEC61215/IEC61730
- ISO 9001:Quality Management System
- ISO 14001:Environment Management System
- ISO 45001:Occupation Health Safety Management System



Note: Read and understand the installation and safety manual before installation. The copyright belongs to Guangdong Jinyuan Solar Energy Co.,Ltd, if any change will not further notice.



## JY4MxxxH72(H)

### Electrical performance parameters (STC)

Power Output	Pmax(W)	525	530	535	540	545	550	555	560
Rated Power Maximum Voltage	Vmp(V)	40.50	40.60	40.70	40.80	40.90	41.00	41.10	41.20
Rated Power Maximum Current	Imp(A)	12.98	13.07	13.17	13.27	13.36	13.45	13.54	13.63
Open Circuit Voltage	Voc(V)	49.20	49.30	49.40	49.50	49.60	49.70	49.80	49.90
Short Circuit Current	Isc(A)	13.62	13.71	13.79	13.85	13.94	14.03	14.12	14.21
Module Efficiency	(%)	20.5	20.7	20.9	21.1	21.3	21.5	21.7	21.9
Power Tolerance	(W)	0~+5W							

\* STC : 1000W/m2 irradiance, 25° C module temperature, AM1.5 spectrum.

### Electrical performance parameters (NMOT)

Power output	Pmax (W)	397.4	401.2	404.9	408.8	412.6	416.4	420.1	423.9
Rated Power Maximum Voltage	Vmp (V)	37.54	37.63	37.73	37.82	37.91	38.00	38.10	38.19
Rated Power Maximum Current	Imp (A)	10.57	10.65	10.74	10.81	10.89	10.96	11.04	11.11
Open Circuit Voltage	Voc (V)	46.44	46.54	46.63	46.73	46.82	46.92	47.01	47.11
Short Circuit Current	Isc (A)	10.90	10.97	11.03	11.08	11.15	11.22	11.30	11.37

\* NMOT:800W/m2 irradiance, 20°C module temperature, 1m/s wind speed.

### Structure Features

Solar Cell	182MONO(Half Cell)
Solar Cell Array	144 pcs(6x24)
Module Dimension	2256×1133×35mm
Weight	27.5 kg
Glass	3.2 mm (0.13 inches) highly transparent anti-reflection coating tempered glass
Back sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm <sup>2</sup> L=300 mm、PV cable
Diode Quantity	3
Wind Pressure/Snow Pressure	2400pa / 5400pa
Connector	MC4 Compatible

\* More details please read the installation manual.

### Temperature Characteristics

Solar Cells Rated Working Temperature	44±2°C
Temperature Coefficient (Isc)	+0.060%/°C
Temperature Coefficient (Voc)	-0.300%/°C
Temperature Coefficient (Pmax)	-0.390%/°C

### Maximum Ratings

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Maximum Fuse Rated Current	25A


### PACKAGING

Number of modules per pallet	31 pcs
17.5*2.8m Flatbed loading	930 pcs
13.0*2.35m Flatbed loading	682 pcs
40HQ Standard container	620 pcs


### Optional

Connector	<input type="checkbox"/> Original MC4
Cable length	<input type="checkbox"/> 1000mm <input type="checkbox"/> 900mm
Frame	<input type="checkbox"/> Black
Solar Module Dimension	<input type="checkbox"/> 2256x1133x40mm
Back sheet color	<input type="checkbox"/> Black <input type="checkbox"/> Transparency


### Module Dimension

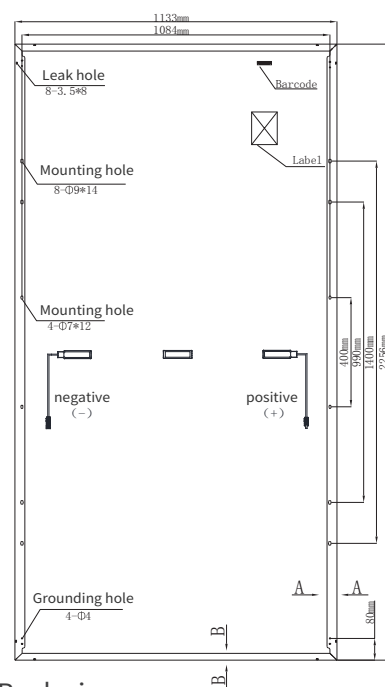


### Back view

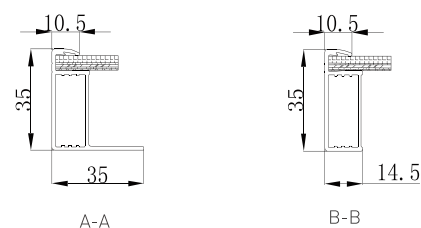

### I-V curves of module under different temperature(545w)

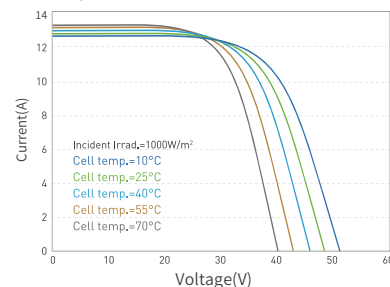

### I-V curves/P-V curves of module under different irradiation(545w)

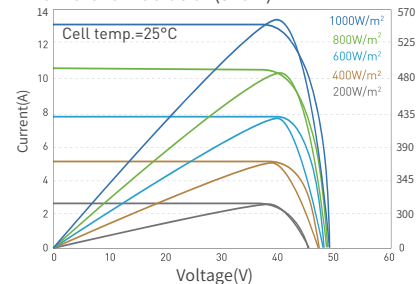

Power measurement error +/-3%

Address: No. D5-8-3, Factory District, Beizhanxi Road, Chaozhou Economic Development Pilot Zone, Chaozhou City, Guangdong Province, China.

TEL: +86-768-2800688  
Fax: +86-768-2800788

Web: <http://www.jinyuansolar.com>

光·爱生活“节”尽所能  
<http://www.jinyuansolar.com>

