




AOLI SOLAR

## Polycrystalline Solar Cells




### 157mm 5BB

Eff (%)	Pmpp (W)	Umpp (V)	Imp (A)	Uoc (V)	Isc (A)
≥ 19.00%	4.67	0.548	8.513	0.645	9.024
18.90%	4.64	0.547	8.489	0.644	9.003
18.80%	4.62	0.546	8.461	0.643	8.991
18.70%	4.59	0.544	8.440	0.641	8.977
18.60%	4.57	0.543	8.424	0.640	8.958
18.50%	4.55	0.541	8.406	0.638	8.936
18.40%	4.52	0.539	8.382	0.637	8.920
18.30%	4.50	0.538	8.362	0.636	8.907
18.20%	4.47	0.535	8.351	0.634	8.892
18.10%	4.45	0.534	8.333	0.633	8.880

Format	157x157mm±0.25mm
Thickness	200mm±30um
Front	5*0.7mm busbar(silver),104 finger,blue silicon nitride anti-reflection coating(PID free)
Back	1.7mm wide soldering pads(silver) and 3.2mm wide soldering pads(aluminum),back surface passivated emitter(AIOx and SiNx dual layer) rear contact

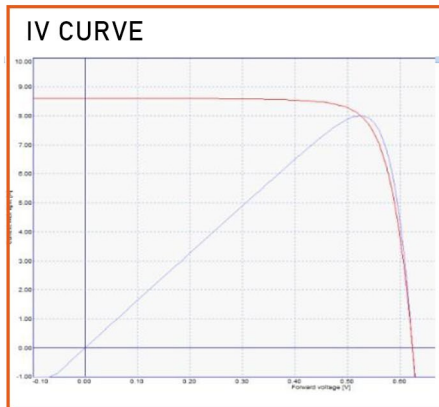

Intensity(W/m <sup>2</sup> )	Uoc	Isc
1000	1.0	1.0
900	0.99	0.9
800	0.99	0.8
600	0.98	0.6
400	0.96	0.4

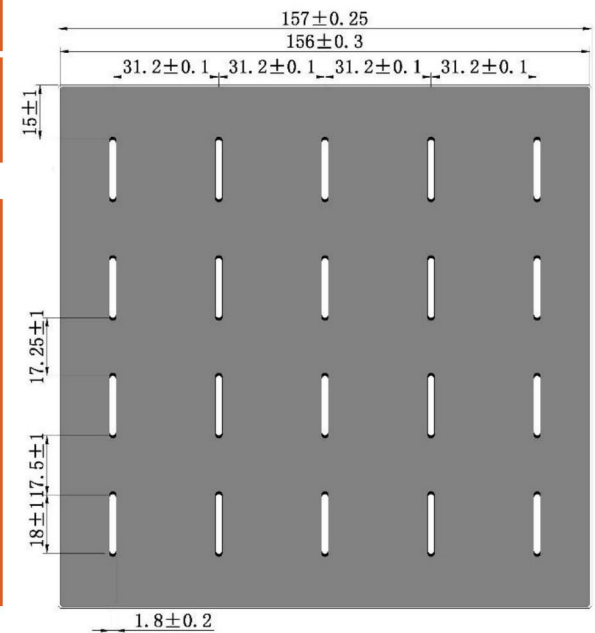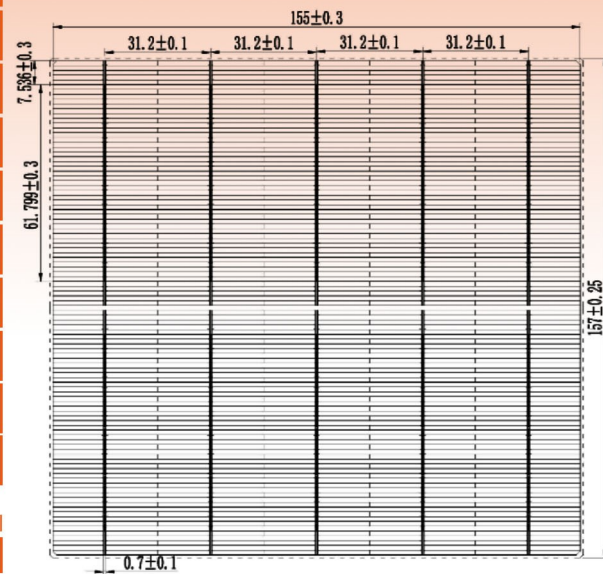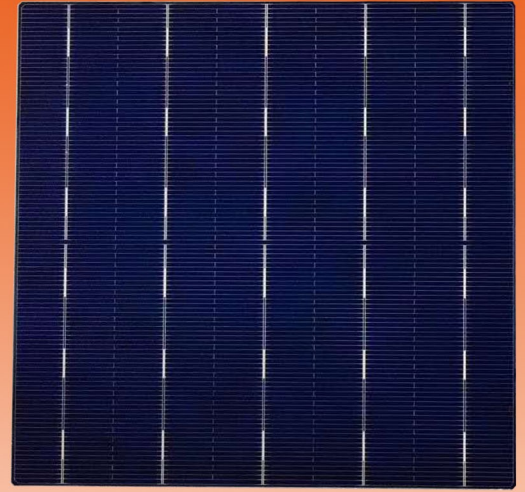

AOLI SOLAR WITH HIGH PERFORMANCE

[www.aolisolar.com](http://www.aolisolar.com)

Head Office:Rm 2506,Unit A ,Tianning Times Building,Changzhou City,JiangSu,China

Factory Add: C1 Buliding,Science & Technology Zone,Changzhou City,JiangSu,China

Email:info@aolisolar.com