

## Poly-Crystalline Solar PV Module 72 Cells Series (156MMX156MM)



### Performance

- Water resistant junction box IP67, IP68 with bypass diode and high strength polymer sheet on module's rear ensures module is sealed from moisture and mechanical damage
- AR coating low iron pattern tempered glass
- UV protection
- Unique drainage hole design and clear anodized aluminum frame
- PV cable with Connector type MC4

### Quality and Reliability

- Superior reliability with guaranteed 0~5W power output tolerance
- 15 years warranty on materials and workmanship,
- 25 years linear power warranty, 97% in the first year, 91% in 10<sup>th</sup> year, and ending with 80% in 25<sup>th</sup> year
- Cells are individually tested, characterized and modulated prior to interconnection
- Test and produce standard: IEC61215, IEC61730, ISO 9001:2008, ISO14001:2004, OHSAS18001:2007, TIS18001:2011, TIS1843:2553, TIS2580:2555

## Electrical Characteristics




Specification	F-300P	F-305P	F-310P	F-315P	F-320P	F-325P	F-330P
Rating power at STC (Wp)	300W	305W	310W	315W	320W	325W	330W
Open circuit voltage (Voc)	44.71V	45.01V	45.31V	45.61V	45.91V	46.21V	46.51V
Short circuit current (Isc)	8.88A	8.94A	9.00A	9.06A	9.12A	9.18A	9.24A
Rated voltage (Vm)	36.19V	36.44V	36.70V	36.94V	37.18V	37.41V	37.63V
Rated current (Im)	8.29A	8.37A	8.45A	8.53A	8.61A	8.69A	8.77A
Module efficiency (%)	15.46%	15.72%	15.98%	16.23%	16.49%	16.75%	17.01%
Power tolerance	0 ~ 5 W						
Temperature coefficient of Pm	-0.40%/K						
Temperature coefficient of Isc	+0.06%/K						
Temperature coefficient of Voc	-0.31%/K						
Maximum system voltage	DC600v (UL) / DC1000V (IEC)						

All technical data at STC: AM1.5; 1000W/m<sup>2</sup>; 25°C

## Mechanical Characteristics

Solar Cell	Polycrystalline 156 x 156 mm (6 inches)
No. of cells	72 (6X12)
Nominal Operating Cell Temperature (NOCT)	46 ± 2 °C
Operation temperature	From -40 to + 85°C
Typical Application	24V DC
Max series fuse rating	15 A
Max wind resistance	2400Pa
Surface max. load capacity	5400Pa
Weight	21.4kg
Dimension	1956X992X35MM

Current-Voltage & Power-Voltage Curve (285-24)

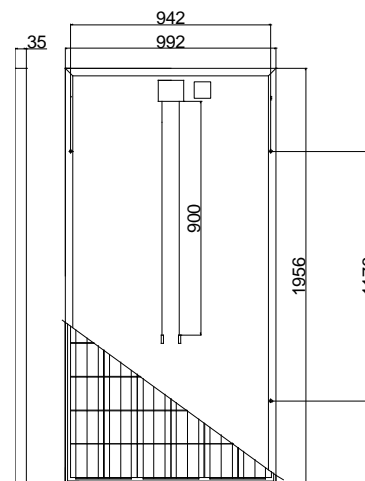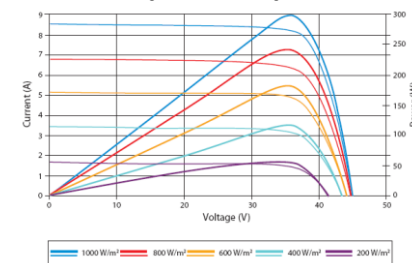

1. Tempered glass
2. EVA
3. Cells
4. EVA
5. Back sheet