

# CHASER-M10/144P

## 520-540W

MONO 10BB HALF-CUT BIFACIAL  
DOUBLE GLASS MODULE

# Bi-Chaser

SK9612MDGDC

## 30

30-year quality warranty with longer operational life

## 1500V

1500V high system voltage design

PID

### Fire class A, harsh environment adaptability

Consist of double-glass, with frameless design to avoid grounding;  
Outstanding anti-PID performance.

30

### 30 -year power warranty

Bifacial module ensures 30-year outdoor operation, longer than the  
conventional type of normally 25 years.



### Elegant appearance & high performance

The bifacial module is of high light transmittance to ensure good  
performance, an advanced solution that enables more energy generation,  
light capturing and elegant appearance.

1500v

### 1500V system voltage

Maximum 1500V DC system voltage , excellent insulation performance  
and lower total system cost.


## LINEAR PERFORMANCE WARRANTY

12  
years

Product warranty on materials and workmanship

30  
years

Linear power output warranty

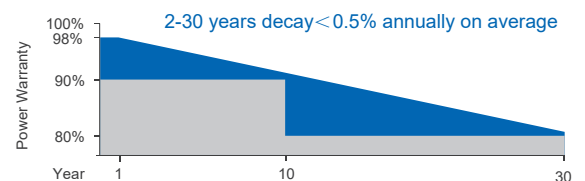

## CERTIFICATES

ISO 9001: 2015  
Quality Management System

IEC 61215 / IEC 61730

ISO 14001: 2015  
Environmental Management System

OHSAS 18001: 2007  
Occupational Health &  
Safety Managemnet System

\*Certification requirements vary in different markets, please consult with Akcome  
Optronics sales team for appropriate certification.

### ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	520 Front	367 Back	525 Front	370 Back	530 Front	374 Back	535 Front	377 Back	540 Front	381 Back
Power Tolerance	0~+3%		0~+3%		0~+3%		0~+3%		0~+3%	
Max. Power Voltage Vmp (V)	41.54	41.82	41.64	41.92	41.74	42.02	41.83	42.11	41.93	42.21
Max. Power Current Imp (A)	12.52	8.77	12.61	8.83	12.70	8.89	12.79	8.96	12.88	9.02
Open Circuit Voltage Voc (V)	49.20	47.28	49.30	47.38	49.40	47.48	49.50	47.58	49.60	47.68
Short Circuit Current Isc (A)	13.35	9.36	13.45	9.43	13.55	9.50	13.64	9.57	13.73	9.63
Module Efficiency (%)	20.1	14.2	20.3	14.3	20.5	14.4	20.6	14.6	20.8	14.7

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5  
\*Measurement Tolerance (±3.0%)

### Inegrated Power @ STC (Refrence to 530W front)

Power Gains	5%	10%	15%	20%	25%
Max. Power Output Pmax (W)	558	585	610	636	663
Max. Power Voltage Vmp (V)	41.85	41.85	41.74	41.74	41.74
Max. Power Current Imp (A)	13.34	13.97	14.61	15.24	15.88
Open Circuit Voltage Voc (V)	49.40	49.40	49.50	49.50	49.50
Short Circuit Current Isc (A)	14.23	14.91	15.58	16.26	16.94

### TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.35%/ °C
Temperature Coefficients of Voc	-0.29%/ °C
Temperature Coefficients of Isc	+0.048%/ °C

### MECHANICAL PARAMETERS

Cell Type	Mono 182x91mm
Number of Cells	144pcs(6x24)
Dimensions ( L*W*H )	2285x1134x35mm
Weight	31.6kg
Frame	Anodised Aluminum
Junction Box	IP67, 3 bypass diodes
Cable, Length	4.0mm <sup>2</sup> , 300mm


### OPERATING CONDITION

Maximum System Voltage(V)	1500(DC)
Operating Temperature(C)	-40~+85
Max. Wind Load / Snow Load(pa)	2400/5400
Max. Over Current(A)	20
Fire Rating	Class A
NOCT(°C)	45±2

### PACKAGE INFORMATION


Container 40'HQ	620pcs
Quantity / Pallet	CTNR: 31pcs

### ASSEMBLY DRAWING (Unit:mm)

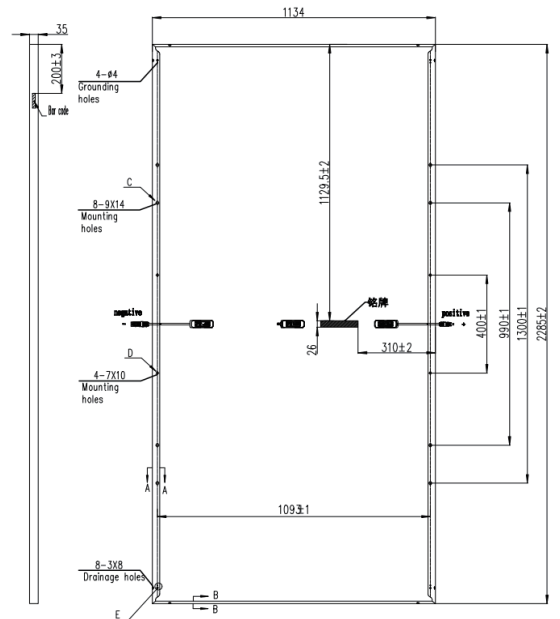

### I-V CURVES

Test temperature 25°C

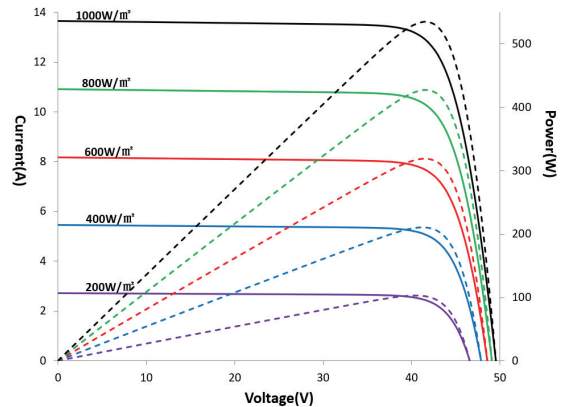

Irradiance: AM1.5, 1000W/m<sup>2</sup>

