

# ZT Series Monocrystalline

Solar Module

250S/255S



## Efficiency

High Module Conversion Efficiencies utilizing three buss bars per cell

## Warranty

Peace of Mind Guaranteed with a twenty-five Year Linear Power Warranty and Product Quality Ensured for ten years

## Certifications

IEC 61215:2005, IEC 61730:2004, UL 1703-3rd Ed: 2014, ULC/ORD C1703-01:2014, ISO 9001:2008, PSK 024:2008

## Tolerance


Strict quality control guarantees higher average power output according to a tolerance -3% to +3%

## Optimized Strength

Minimum standard for wind 2700Pa to a Mechanical load capacity up to 5400Pa meet customer's needs for durability on high mountains, sea shores, & paths between buildings



Module Construction

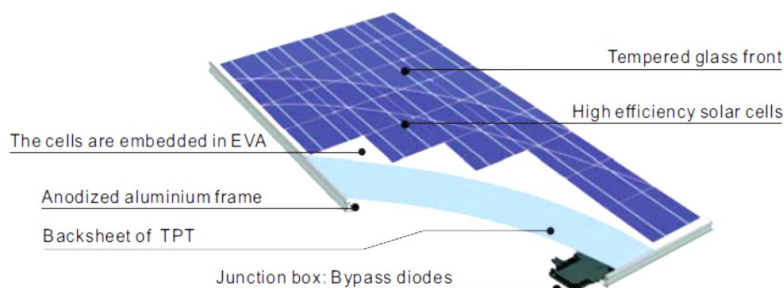

**EMPOWERING You**  
To Change The Future

Zytech was founded in Zaragoza (Spain) in 2005. Since then the group has progressively increased its infrastructure and production capacity to become a global power with offices and headquarters in Spain, Germany, France, Italy, BENELUX, Mexico, United States of America, Korea, Malaysia and China.

Zytech takes pride in their R&D department which specializes in product enhancement, state-of-the-art machinery and rigorous quality control that guarantees an European quality product at the best price.



[www.zytechsolar.com](http://www.zytechsolar.com)

# ZT Series Monocrystalline

Solar Module

250S/255S



## Cell Data

Technology	Monocrystalline Silicon
Number Per Module	60
Dimension	156 x 156 mm
Orientation	6 × 10

## Thermal Data

Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of Voc	-0.34% / °C
Temperature Coefficient of Isc	+0.037 % / °C
Temperature Coefficient of Power Pmax	- 0.48 % / °C

## Electrical Data (STC)


		ZT 250S	ZT 255S
Maximum power (W)	Pmax	250	255
Power Output Tolerance (%)		-3% to +3%	
Maximum Power Voltage (V)	Vmpp	30.96	31.10
Maximum Power Current (A)	Imp	8.07	8.20
Open Circuit Voltage (V)	Voc	37.92	38.10
Short Circuit Current (A)	Isc	8.62	8.76
Module Efficiency (%)		17.96%	18.32%

\* At Standard Conditions (STC) Irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1,5 at a cell temperature of 25°C

## System Integrated Parameters

Maximum System Voltage SCII	1000 VDC (UL1000V)
Maximum Reverse Current	Do not apply external voltages larger than Voc to the module
Operating Temperature	-40~+85°C
Max Series Fuse Rating	15A

## IU and PU Curve

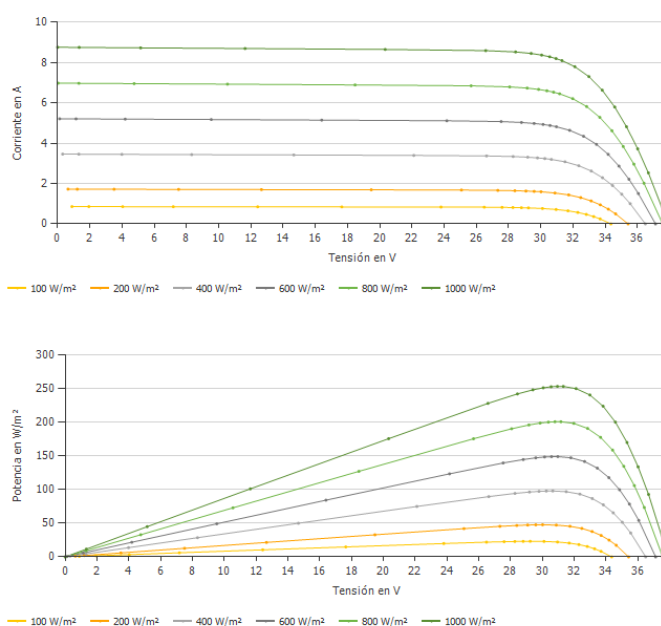

## Physical Characteristics

Module Dimension (L×W×H)	1640x992x35/40 mm Code: PV30035 - ZT250S
Weight	18 kg
J-Box	IP65 or IP67 rated, 3/6 diodes
Connector	MC4 or MC4 Compatible
Glass	3.2mm (0.13 in), High Transmission, AR Coated Tempered Glass
Cable	4 mm <sup>2</sup> PV cable, 1000mm/1200mm
Frame	Silver Anodized Aluminum Alloy

## Packing Configuration

Modules Per Pallet	26
Pallet Per 40' HQ Container	22
Packing Box Dimension (L×W×H)	2000×1150×1040 mm
Packing Orientation	Side

**ZYTECH SOLAR S.L.**

P. Industrial Centrovía- C/R. Janeiro, 12  
50198 La Muela (Zaragoza) SPAIN  
Tel: +34 976 141819 / Fax: +34 976+141818  
info@zytech.es  
www.zytechsolar.es

\*Zytech Solar reserves the right to change specifications without notice\*