


6-CNJ-100GEL BATTERY

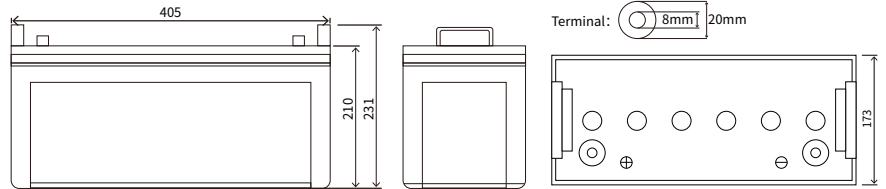

Technology data

Rated voltage	Capacity (10hr,1.80V/Cell)	Weight	Max discharge current	Max charging current	Self-discharge (25°C)	Recommended Using temperature	Cover Material
12V	100Ah	30Kg	30I ₁₀ A(3min)	≤0.25C ₁₀	≤3%/month	15°C~25°C	ABS
Using temperature	Charging Voltage (25°C)	Charging Mode (25°C)		Cycle life	Capacity Affected by Temperature		
Discharge: -45°C~50°C	floating charge:	Float Charge: 2.275±0.025V/Cell		100%DOD 490 times	105% @ 40°C		
Charge: -20°C~45°C	13.5V-13.8V	Temperature parameters: ±3mV/Cell °C		50%DOD 1250 times	80% @ 0°C		
Storage: -30°C~40°C	equalizing charge:	Cycle Charge: 2.45±0.05V/Cell		30%DOD 2150 times	58% @ -20°C		
	14.1V-14.4V	Temperature Compensation Coefficient ±5mV/Cell °C					

Features

battery, Maintenance free and easy to use, Contemporary advanced technology research and development of new high-performance batteries, It can be widely used in solar energy, wind energy, telecommunication systems, off-grid systems, UPS and other fields. The designed life for the battery could be eight years up for float use.

Different discharge time at different terminal Voltage, discharge time(Amps,25)

Termination Voltage (V/Cell)	1H	3H	5H	10H	20H	50H	100H	120H	240H
1.7	55.22	25.11	16.78	10.82	5.59	2.35	1.28	1.13	0.60
1.75	54.12	24.85	16.48	10.67	5.46	2.26	1.19	1.05	0.55
1.8	53.04	24.61	16.22	10.40	5.33	2.18	1.14	0.98	0.53
1.85	50.92	24.47	15.91	9.97	5.07	2.09	1.07	0.92	0.48
1.9	48.89	24.26	15.68	9.76	4.98	2.03	1.03	0.88	0.45
1.95	46.74	23.77	15.35	9.22	4.64	1.89	0.98	0.84	0.43

Constant current discharge coefficient(25°C, A)

Certificate

ISO9001
ISO14001
CE
CGC
TLC
High and NEW
Technology
Products Certification



Pb



Pb



通信产品认证



生产许可



国家高新技术企业



国家金太阳
优质供应商




国家免检产品




Performance characteristics

NOTE: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.


Temperature and service life

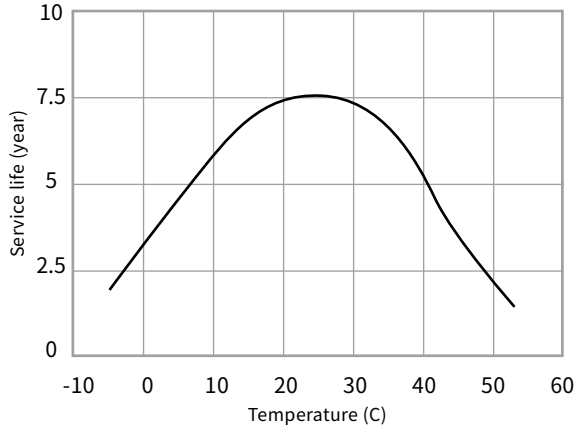


Discharge performance at different discharge rates (25°C/77°F)

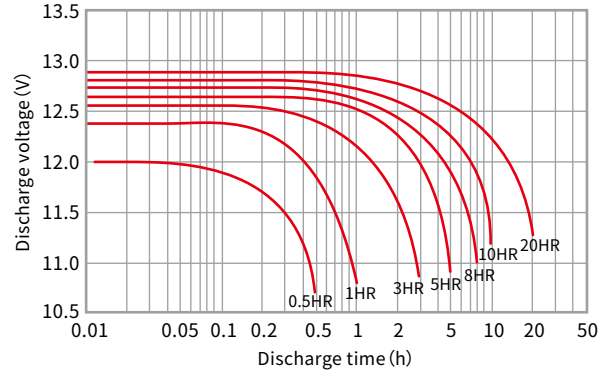


Temperature and discharge capacity

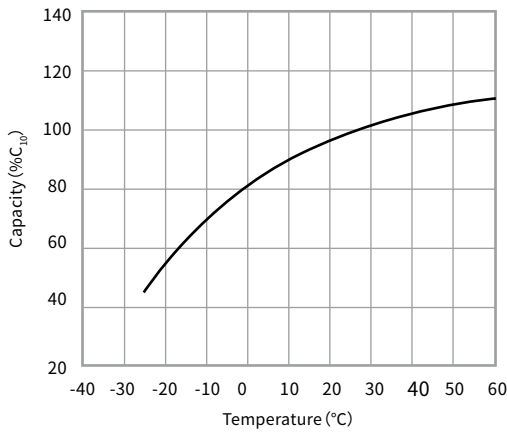


Self discharge parameters characteristics

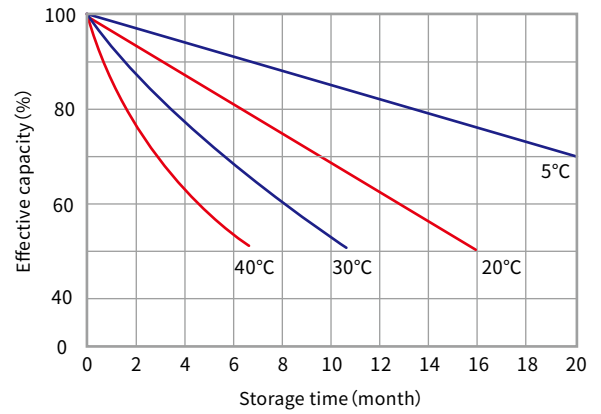

Constant-potential charge

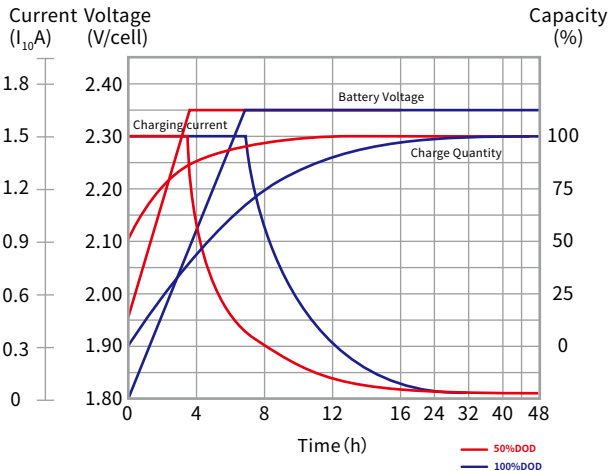

Cycle Service Life (25°C/77°F)

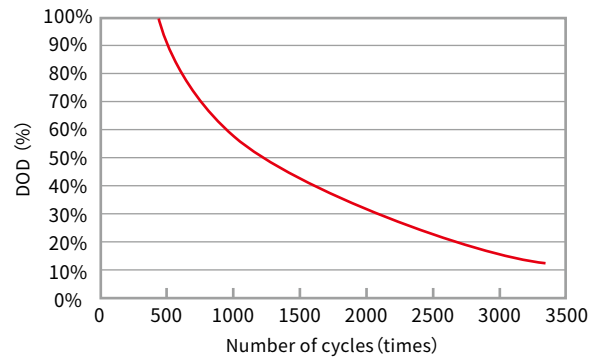

Pb

Pb

无铅

无镉

CAC

TLC

通信产品认证

生产许可

国家高新技术企业

国家金太阳
优质供应商

国家免检产品

TFC