


SUNFUTURE

MORE BRIGHT FUTURE FROM

SF-72P

SUNFUTURE

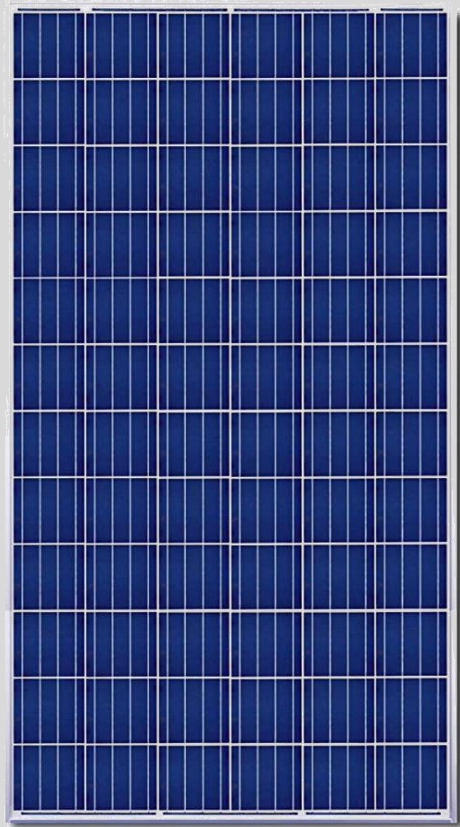

POLY 320W 325W 330W 340W 350W 360W



Higher Durability

The multi-busbar design can decrease the risk of the cell micro-cracks and fingers broken.



High Power Density


High conversion efficiency and more power output per square meter, by lower series resistance and improved light harvesting.



PID Resistant

Tested in accordance to the IEC 62804 standard, SF modules have demonstrated resistance against PID (Potential Induced Degradation), which translates to security for the investment.

25 Years Linear Warranty

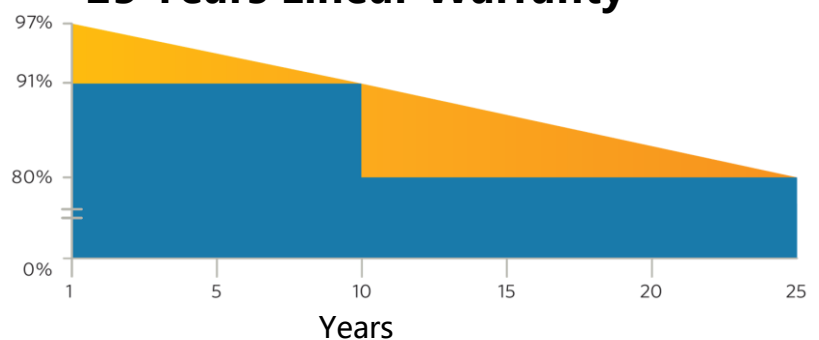

 **SF's Linear Performance Warranty**

 **Industry Standard Warranty**

22.40%


CELL EFFICIENCY

12 YEAR

PRODUCT WARRANTY

0-5W

POWER TOLERANCE



www.sunfuturetech.com

More bright future from Sunfuture

20201101V11

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

Module type	SF***-72P							
Power output	P_{max}	W	320	325	330	340	350	360
Module efficiency	η_m	%	16.49	16.75	17.01	17.52	18.04	18.61
Voltage at P_{max}	V_{mp}	V	37.50	37.90	38.20	38.50	38.90	39.30
Current at P_{max}	I_{mp}	A	8.53	8.58	8.64	8.83	9.00	9.16
Open-circuit voltage	V_{oc}	V	45.00	45.48	45.84	46.20	46.68	47.05
Short-circuit current	I_{sc}	A	8.96	9.00	9.07	9.27	9.45	9.76

STC: 1000W/m² irradiance, 25° C cell temperature, AM1.5g spectrum according to EN 60904-3.

Average relative efficiency reduction of 3.0% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

Power output	P_{max}	W	236.0	239.7	243.4	250.8	258.2	265.5
Voltage at P_{max}	V_{mp}	V	34.55	34.91	35.19	35.47	35.83	36.20
Current at P_{max}	I_{mp}	A	6.83	6.86	6.91	7.06	7.20	7.33
Open-circuit voltage	V_{oc}	V	41.92	42.36	42.70	43.03	43.48	43.83
Short-circuit current	I_{sc}	A	7.17	7.20	7.26	7.42	7.56	7.81


NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal operating cell temperature (NOCT)	45°C ± 2
Temperature coefficient of P_{max}	-0.408%/°C
Temperature coefficient of V_{oc}	-0.292%/°C
Temperature coefficient of I_{sc}	+0.045%/°C

OPERATING CONDITIONS & DIMENSION

Max. system voltage	1500V _{DC}
Max. series fuse rating	15A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Dimension(mm)	1956×992×40
Weight	20.3kg
Frame colour	Silver/Black

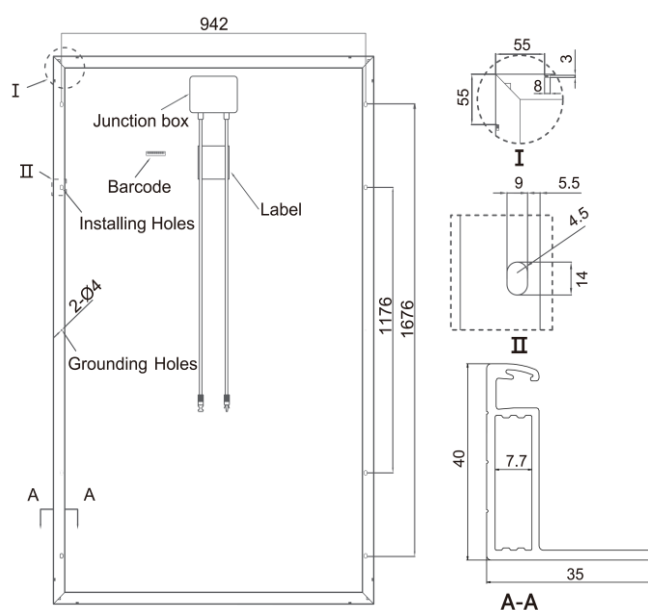

Back View

Unit: mm

www.sunfuturetech.com

SUNFUTURE NEW ENERGY TECHNOLOGY CO.,LTD.

TEL: +86(0871)63601319/+8613116261718

Email: info@sunfuturetech.com

NO. G124, Building 7, Shuntong Hardware & Electrical city, Shuntong Ave. Ala street office,
Economic development zone, Kunming area, China (Yunnan) Free Trade Zone

Facebook: <https://www.facebook.com/Sunfuture-TECH-106964277619197>