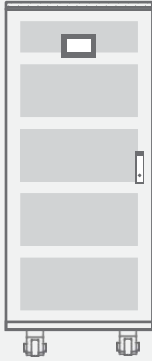
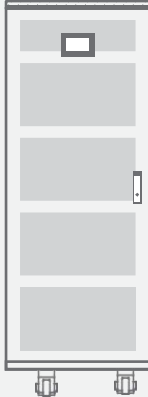
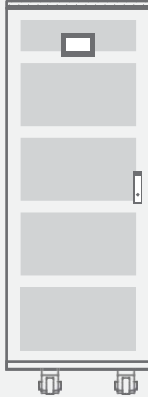


System model	204160	204230	204280
System Appearance			
<b>Module unit</b>			
Module model	51.2V160Ah	51.2V230Ah	51.2V280Ah
Module configuration	16S2P	16S1P	16S1P
Module size	482.6*554*221.5MM	482.6*614*265.9MM	482.6*754*265.9MM
Module weight	About 72KG	About 90KG	About 114KG
Number of modules	4PCS	4PCS	4PCS
Type of battery	LiFePO4	LiFePO4	LiFePO4
<b>System parameter</b>			
Rated Voltage	204.8V		
Operating voltage range	147.2-233.6V		
Equalizing charging voltage range	217.6-220.8V		
Floating charge voltage range	214.4-217.6V		
Rated capacity	160Ah	230Ah	280Ah
Rated energy	32.76KWh	47.1KWh	57.34KWh
Rated charging current	80A	115A	140A
Maximum charging current	160A	230A	280A
Rated discharge current	160A	230A	280A
Maximum discharge current	320A	460A	460A
Charging temperature range	0-55°C		
Discharge temperature range	-10-55°C		
Optimum operating temperature	15-25°C		
Cooling mode	natural cooling		
Relative humidity	5%-95%		
Operating altitude	≤2000M		
Cycle life	≥3500 times @80%DOD, 0.5C/0.5C, 25°C		
Communication method	2.0/RS485/dry contact		
Protection function	Overtemperature, overcurrent, short circuit, overcharge, overdischarge, etc.		
Display Screen	LCD touch screen		
Design service life	≥10 years		
Certifications	UN38.3/UL1973/IEC62619		
Cabinet size	600*600*1465MM	600*660*1643MM	600*800*1643MM
Gross weight	About 385KG	About 465KG	About 565KG