

THE ANTARIS P6 SERIES

- Using high-quality components, ANTARIS modules are manufactured from high-quality components for use worldwide in photovoltaic systems.
- Continuous quality controls throughout the entire production process
- Production with the latest technology for quality assurance
- Quality assurance provided by external, independent testing institutes in Germany

We have granted the ANTARIS P6 SERIES a 30-year performance guarantee and a 12-year product guarantee



Also
available in
BLACK



ANTARIS SOLAR GmbH & Co. KG
 Head office
 63735 Aschaffenburg, Germany

Phone: +49 (0) 6095 950-441
 Fax: +49 (0) 6095 950-544
 Email: info@antaris-solar.com
 Internet: www.antaris-solar.com

LIVING BY THE SUN!

AS P6 SERIES

ELECTRICAL PROPERTIES (STC *)

ANTARIS SOLAR AS P6 series		P 265	P 270	P 275
Rated output (P _{max})	[Wp]	265	270	275
Voltage with P _{max} (V _{mpp})	[V]	30.9	31.1	31.3
Current with P _{max} (I _{mpp})	[A]	8.58	8.69	8.79
Open circuit voltage (V _{oc})	[V]	38.3	38.4	38.5
Short circuit current (I _{sc})	[A]	8.98	9.06	9.15
Output tolerance to rated output		0 ~ +3 %		
Max. reverse current (I _r)	[A]	15		
Max. system voltage	[V]	IEC 1000		
Degree of module effectiveness [%]		16.29	16.60	16.90
Application category		(as per IEC 61730) A		
Fire category		(as per IEC 61730) C(UL)		
Protection rating		(as per IEC 61730) II		

STC * (Standard test conditions): Irradiation 1000 W/m², module temperature 25°C, air mass 1.5

ELECTRIC OUTPUT WITH NOCT

ANTARIS SOLAR AS P6 series		P 265	P 270	P 275
Rated output (P _{max})	[Wp]	195	199	202
Voltage with P _{max} (V _{mpp})	[V]	28.1	28.3	28.5
Current with P _{max} (I _{mpp})	[A]	7.27	7.34	7.41
Open circuit voltage (V _{oc})	[V]	35.3	35.4	35.5
Short circuit current (I _{sc})	[A]	7.09	7.15	7.21

NOCT: Irradiation 800 W/m², air 20°C, module temperature 45 +/- 2°C, air mass 1.5

TEMPERATURE PROPERTIES


NOCT**	45 +/- 2°C
Temperature coefficient P _{max}	-0.43 %/°C
Temperature coefficient V _{oc}	-0.33 %/°C
Temperature coefficient I _{sc}	0.056 %/°C
Operating temperature	from -40 to +85°C

NOCT**: Nominal cell operating temperature sun 800 W/m², air 20°C, wind speed 1m/s


MECHANICAL PROPERTIES

Solar cells	60 (6x10) polycrystalline silicon solar cells, 156 x 156 mm
Front surface	3.2 mm thick, low-iron solar glass
Rear side cover	Film compound (EVA/TPT)
Frame	Anodised aluminium
Diodes	3 bypass diodes
Junction box	Protection degree IP67
Plug-in connector	MC4 compatible
Cables	Length: 900 mm / profile: 4 mm ²
Dimensions	1640 x 992 x 40 mm 64.57 x 39.06 x 1.57 inches
Weight	18.5 kg / 40.8 lbs
Snow load	5400 Pa
Wind load	60 m/s (200 kg/m ²)
Hail test	227 g steel balls from 1 m height
Performance guarantee	Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

SCHEMA AS P6 SERIES

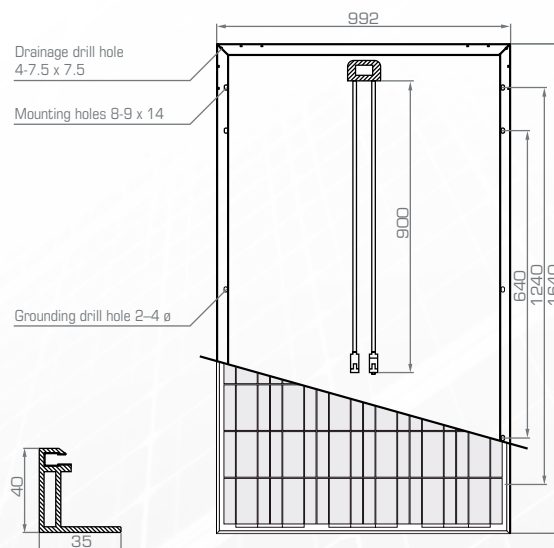

CURRENT-VOLTAGE CHARACTERISTIC CURVE

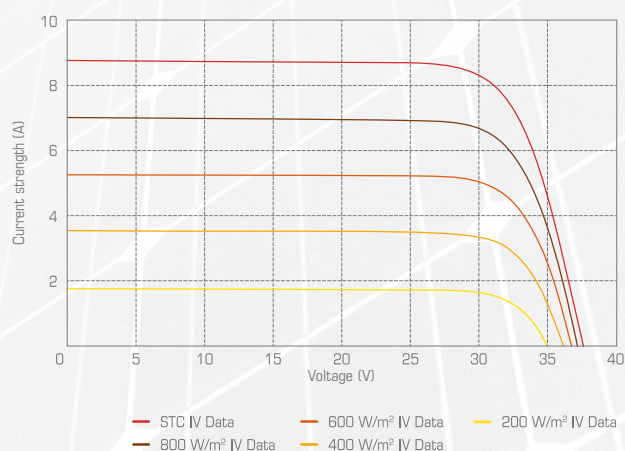

The typical change in the degree of module effectiveness with an irradiation of 200 W/m² instead of 1000 W/m² (both at 25°C and spectrum AM 1.5) < 3%

