


SunBravo PM072MW2

Mono-Crystalline Photovoltaic Module



Power Range
380 ~ 400 Wp

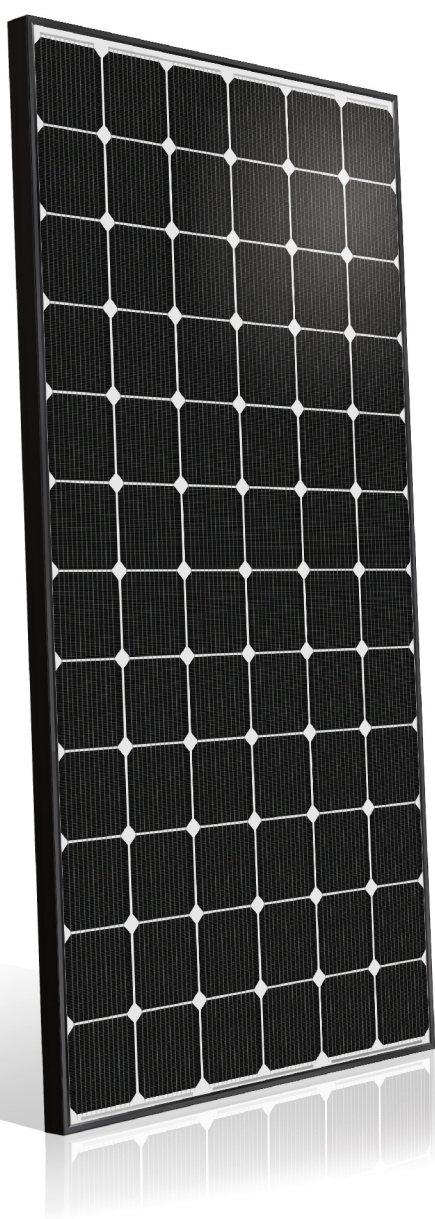

Multi-Busbar Design
Enhanced module power output and reliability



Strong Wind Resistance
Dynamic mechanical loading 4 times higher than the IEC requirement



PID-Resistance
Certified high PID resistance passing 1000-hour tough environmental test



Superior Weak Light Performance
Improved absorption of long wavelength light



Enhanced Salt Mist and Humidity Resistance
12 times more salt-mist resistant and 40% more moisture exclusion



Ammonia Test
Reliable in ammonia rich environment



SunBravo PM072MW2 (380 ~ 400Wp)

Electrical Data (STC)

Nominal Power P_N	380W	385W	390W	395W	400W
Module Efficiency	18.4%	18.7%	18.9%	19.1%	19.3%
Nominal Voltage V_{mp} (V)	38.88	39.16	39.31	39.53	39.77
Nominal Current I_{mp} (A)	9.79	9.85	9.92	9.99	10.06
Open Circuit Voltage V_{oc} (V)	47.72	47.90	48.08	48.26	48.44
Short Circuit Current I_{sc} (A)	10.31	10.38	10.45	10.52	10.59
Maximum Tolerance of P_N	0 / +3%				

• Above data are the effective measurement at Standard Test Conditions (STC)
• STC: irradiance 1000 W/m², spectral distribution AM 1.5, temperature 25 ± 2 °C, in accordance with EN 60904-3
• Measurement tolerances: STC ± 3 %

Electrical Data (NOCT)

Nominal Power P_N	274W	278W	282W	285W	289W
Nominal Voltage V_{mp} (V)	34.61	34.83	35.05	35.26	35.47
Nominal Current I_{mp} (A)	7.93	7.99	8.04	8.09	8.15
Open Circuit Voltage V_{oc} (V)	47.11	47.28	47.46	47.64	47.82
Short Circuit Current I_{sc} (A)	8.41	8.47	8.52	8.58	8.64

• Above data are the effective measurement at Normal Operation Cell Temperature (NOCT)
• NOCT: irradiance 800 W/m², AM 1.5, air temperature 20 °C, wind speed 1 m/s

Temperature Coefficient

NOCT	46 ± 2 °C
Typ. Temperature Coefficient of P_N	-0.38% / K
Typ. Temperature Coefficient of V_{oc}	-0.30% / K
Temperature Coefficient of I_{sc}	0.07% / K

Mechanical Characteristics

Dimensions (L x W x H)	2024 x 1022 x 40 mm (79.68 x 40.23 x 1.57 in) *
Weight	23.5 kg (51.8 lbs)
Front Glass	High transparent solar glass (tempered), 3.2 mm (0.13 in)
Cell	72 monocrystalline solar cells
Back Sheet	Composite film
Frame	Anodized aluminum frame
Junction Box	IP-68 rated with 3 bypass diodes
Connector Type	1000V : MC4 KST4 ; KBT4 - 1 x 4 mm ² (0.04 x 0.16 in ²)

* Module Dimension (L x W) Tolerance: ± 2 mm (0.079 in)

Operating Conditions

Operating Temperature	-40 ~ +85 °C
Ambient Temperature Range	-40 ~ +45 °C
Max. System Voltage	1000 V
Serial Fuse Rating	20 A
Front / Rear Load	6000 Pa / 4800 Pa
Max. Dynamic Mechanical Load	4800 Pa
Safety Class	II

Warranties and Certifications

Product Warranty	Maximum 15 years for material and workmanship
Performance Guarantee	Guaranteed linear degradation to 85% for 25 years *1
Certifications	According to IEC/EN 61215 and IEC/EN 61730 guidelines *2


*1: Please refer to warranty letter for detail

*2: Please confirm other certifications with official dealers


Packing Configuration

Container	20' GP	40' GP	40' HQ
Pieces per Pallet	26	26	26
Pallets per Container	5	11	22
Pieces per Container	130	286	572

Dimensions mm (inch)

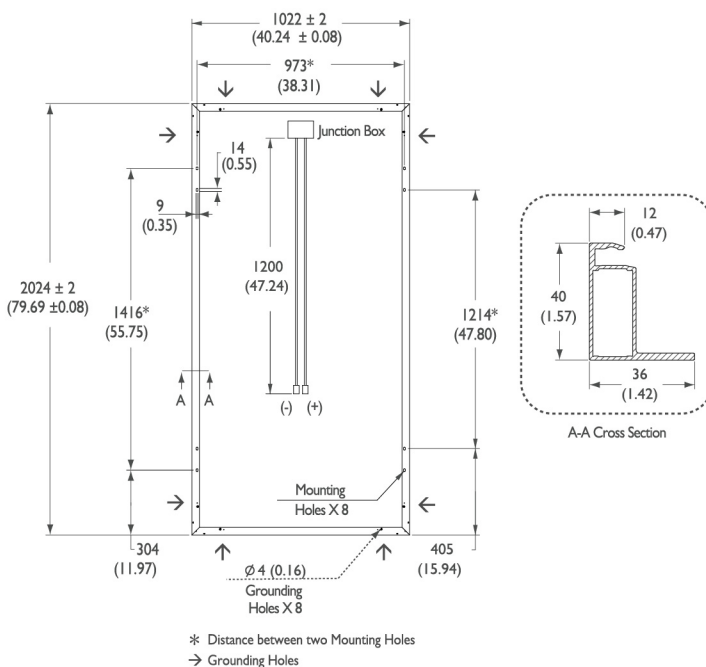

I-V Curve

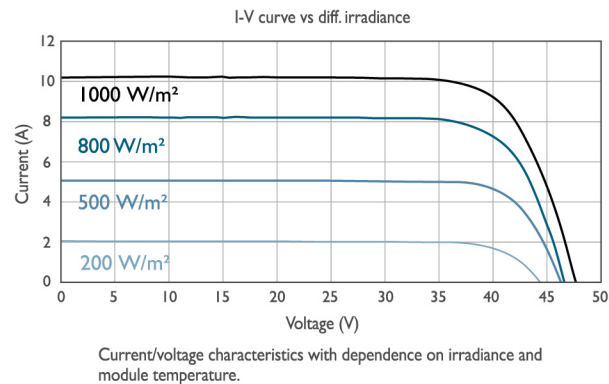

This datasheet complies with the EN50380 requirements.



solar.AUO.com



About AU Optronics

AU Optronics (AUO) is one of the world's leading providers of optoelectronic solutions. In addition to its strengths in product and technological innovation, AUO stresses its commitment to going green and to utilizing manufacturing excellence to develop reliable and high quality energy solutions for residential, commercial, and utility segments.

© Copyright September 2019 AU Optronics Corp. All rights reserved. Information may change without notice. This datasheet is printed with Soy Ink.