

**HIGH PERFORMANCE
MONOCRYSTALLINE PERC MODULE**

SYM72-6-360M-380M

72 CELL MONOCRYSTALLINE MODULE

360-380Wp POWER OUTPUT RANGE

1500VDC MAXIMUM SYSTEM VOLTAGE

19.6% MAXIMUM EFFICIENCY



About Twinsel

Twinsel is a manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Twinsel's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.



KEY SALIENT FEATURES



Industry leading lowest thermal co-efficient of power



Industry leading 12 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive tight power tolerance



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses



Warranted reliability and stringent quality assurances well beyond certified requirements



Certified to withstand severe environmental conditions

- ◆ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
- ◆ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
- ◆ Excellent mechanical load 2400Pa & snow load 5400Pa resistance




ISO9001
ISO14001
OHSAS18001



LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 25 year Linear Power Warranty

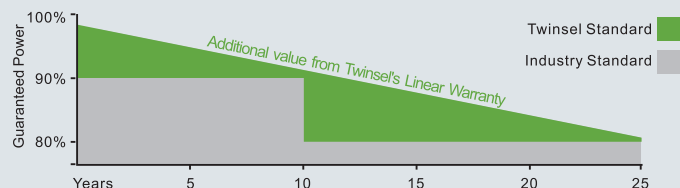

ZHEJIANG TWINSEL ELECTRONIC TECHNOLOGY CO., LTD.

Add: Tashan Industry Zone, Meilin Street Ninghai County, Ningbo City, China.




Mail: tony@twinsel.com

Website: www.twinsel.com

Tel: 86-574-59953554

Fax: 86-574-65173959

Dimensions of PV Module Unit: mm

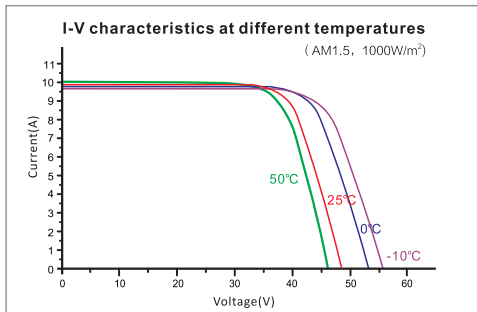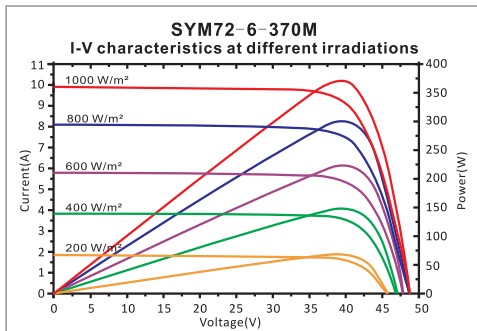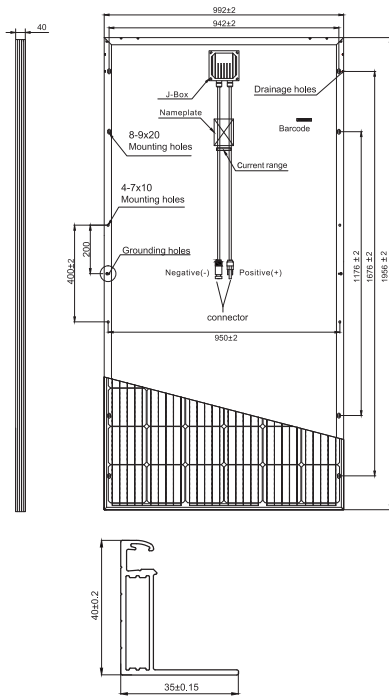

Our Partners:

ELECTRICAL DATA (STC)

Model Number	SYM72-6-360M	SYM72-6-365M	SYM72-6-370M	SYM72-6-375M	SYM72-6-380M
Rated Power in Watts-Pmax(Wp)	360	365	370	375	380
Open Circuit Voltage-Voc(V)	47.30	47.70	48.15	48.60	48.95
Short Circuit Current-Isc(A)	9.80	9.85	9.90	9.95	10.00
Maximum Power Voltage-Vmpp(V)	38.95	39.25	39.60	39.95	40.25
Maximum Power Current-Impp(A)	9.25	9.30	9.35	9.40	9.45
Module Efficiency (%)	18.6	18.8	19.1	19.3	19.6

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

ELECTRICAL DATA (NMOT)

Model Number	SYM72-6-360M	SYM72-6-365M	SYM72-6-370M	SYM72-6-375M	SYM72-6-380M
Maximum Power-Pmax (Wp)	269.3	272.8	276.8	280.7	284.3
Open Circuit Voltage-Voc (V)	43.5	43.90	44.30	44.70	45.00
Short Circuit Current-Isc (A)	8.04	8.08	8.12	8.16	8.20
Maximum Power Voltage-Vmpp (V)	35.70	36.00	36.30	36.60	36.90
Maximum Power Current-Impp (A)	7.55	7.59	7.63	7.67	7.71

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline 156.75×156.75mm,5BB
Cell configuration	72 cells (6×12)
Module dimensions	1956×992×40mm
Weight	22kg
Superstrate	3.2 mm, High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6063T5, Silver Color
J-Box	Potted, IP67, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm (12AWG), 1200mm length
Connector	Twinsel PV-SY02,IP67

TEMPERATURE & MAXIMUM RATINGS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	648	270
Number of modules per pallet	27	27
Number of pallets per container	24	10
Packaging box dimensions (LxWxH) in mm	1980×1130×1130	1980×1130×1130
Box gross weight(kg)	640	640

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT
© 2019 Twinsel. All rights reserved. Specifications included in this datasheet are subject to change without notice