

American Solar

Wholesale
Quality you can count on

MADE IN USA 

Polycrystalline


285 – 335 WATT

HIGH QUALITY POLY-CRYSTALLINE PV MODULES
Available In Both Standard and Black on Black

American Solar Wholesale

Using automated production lines, top of the line solar cells and materials complying to the highest industry standards. American Solar Wholesale provides a complete set of poly and mono-crystalline PV modules ranging from **10W to 360W**

American Solar Wholesale offers panels for use in small off-grid systems to the largest on-grid solar farms. Panels are tested and qualified for the severest weather conditions.

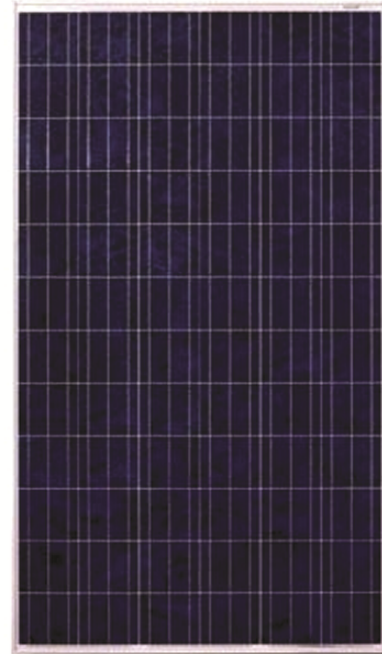

Features

Solar module efficiency up to 17.3%
Protective bypass diodes
Factory equipped weatherproof junction Box
Waterproof (UL94. V-O) connector
Anodized aluminum frame
Tempered Glass
EVA resin
Weather proof film
Highest standards in manufacturing and design quality
Cleanroom-like production line

Benefits

Generate more energy per square meter
Avoids effect of partial shading
Flawless operation in wet weather and marine applications
Perfect for GRID applications
Resilient to harsh weather conditions
Optimal panel performance
Long term production performance

Only qualified personnel should install or perform maintenance. Please read the American Solar wholesale Installation Manual before installation; Be aware of dangerously high DC voltage; Do not install modules when wet or broken.

QUALITY ASSURANCE

- Backed by liability insurance
- Salt Mist Corrosion Certified
- Wind Resistance Load: 6000Pa
- ISO9001:2008
- Electrical insulation test
- Outdoor exposure test
- Hot spot endurance test
- UV exposure IEC61345
- Thermal cycling
- Humidity freeze
- Damp heat test
- Robustness and termination test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test

INVESTMENT PROTECTION

- 10 years product workmanship guarantee
- 12 years 90% power output warranty
- 25 years 80% power output warranty





specifications to change without notice.

American Solar Wholesale, Las Vegas Nevada 89128
Phone: (800) 909-4608 or (949) 272-001 Fax: (800) 909-6851

www.AmericanSolarWholesale.com
sales@americansolarwholesale.com

Electrical

Maximum Power (+ 3%)	285	290	295	300	305	310	315	320	325	330	335
Open Circuit Voltage (V)	44.21	44.28	44.42	44.86	45.00	45.22	45.23	45.51	45.79	46.08	46.37
Short Circuit Current (A)	8.32	8.46	8.49	8.54	8.56	8.62	9.31	9.38	9.44	9.50	9.56
Maximum Power Voltage (V)	36.79	36.79	37.01	37.66	37.87	38.02	36.29	36.59	36.88	37.22	37.55
Maximum Power Current (A)	7.75	7.96	8.00	8.05	8.08	8.16	8.68	8.75	8.81	8.87	8.94
Solar Module Efficiency (%)	14.7%	14.9%	15.2%	15.5%	15.7%	16.0%	16.2%	16.5%	16.7%	17.0%	17.3%
Series Fuse Rating (A)	15A										
Terminal Box Protection Code	IP65										
Maximum System Voltage (V)	VDC1000										
Operating Temperature (C)	-40°C to +85										
Number of Cells	72 (6" Poly)										
Connector Type	Tyco/Mc4 – based on customer request										

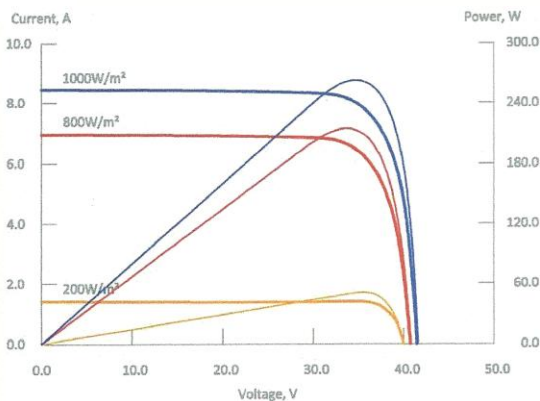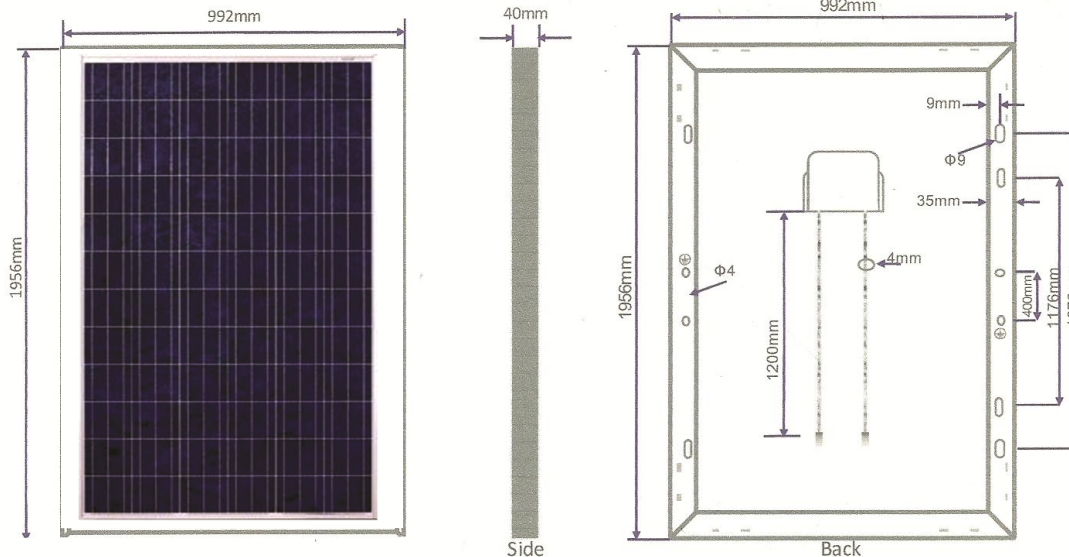

Mechanical

Frame	Anodized Aluminum
Dimension (L x W x D)	77.01" x 39.06" x 1.57"
Weight/pc	23.0kg/50.7 lbs
Packing	26 pcs/ carton
Loading/container	312 pcs/20ft; 728/40 ft
Maximum Wind Load	30lbs/ft²

Temperatures

NOCT	47°C
Short Circuit Current	+0.05%/C
Open Circuit Voltage	-0.32%/C
Max Power Output	-0.42%/C

Temperatures

Irradiance	1000W/m²
Module temperature	25°C
AM	1.5



specifications subject to change without notice.