

XXR M6-166

6BB Monocrystalline Silicon Solar Cell PERC

PHYSICAL CHARACTERISTICS

Dimension 166*166mm
Wafer Thickness 190 μ m \pm 20 μ m
Front(-) Six 0.5mm wide bus bars (silver) with distance 18mm
alkaline texturized surface with dark blue silicon nitride AR coating
Back(+) 1.5mm wide silver/aluminum soldering pads, aluminum local back surface field.

TYPICAL ELECTRICAL CHARACTERISTICS

Efficiency Code	2150	2160	2180	2200	2220	2240	2260	2280	2300	2320	2340
Efficiency(%)	21.5	21.6	21.8	22.0	22.2	22.4	22.6	22.8	23.0	23.2	23.4
Pmax(W)	5.891	5.918	5.973	6.028	6.083	6.138	6.192	6.247	6.302	6.357	6.412
Vmp(V)	0.530	0.530	0.530	0.530	0.530	0.530	0.530	0.530	0.530	0.530	0.530
Imp(A)	11.115	11.167	11.270	11.374	11.477	11.580	11.684	11.787	11.891	11.994	12.097
Voc(V)	0.625	0.625	0.625	0.625	0.625	0.625	0.625	0.625	0.625	0.625	0.625
Isc(A)	11.671	11.725	11.834	11.942	12.051	12.159	12.268	12.377	12.485	12.594	12.702

Data under standard testing conditions(STC): 1,000W/m², AM1.5, 25 $^{\circ}$ C, eff. tolerance : average + 0.3%/-0.1% absolute.


TYPICAL TEMPERATURE COEFFICIENTS

Voltage -2.00 mV/K
Current +3.70 mA/K
Power -0.4%/K

CONDUCTOR PATTERNS



TYPICAL I-V CURVE (Cell Efficiency 22%)

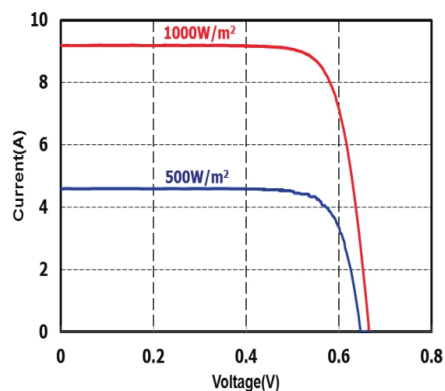

PACKAGE

Typical package for 1 pallet contains 24 cartons, 1 carton contains 1,680cells. The cells are sealed in cell box every 120pcs. Gross weight per unit carton shall be around 19.3kgs.



Shenzhen Xiangxinrui Solar Energy Co., Ltd

Factory :4F Building , Xinfra 1st Rd, Xinfra Industry Park, Shajing, Shenzhen

Tel: +86-13632917290

Email :xxy_xxysolar@foxmail.com