



156 x 156 sq. mm polycrystalline cells with high conversion efficiency.



Design optimum for use in residential and commercial scale installations.



Anodized aluminum frame for extended life span of panel.



RFID tag enable to uniquely identify the module.



10 years limited product warranty.



90% performance warranty for first 10 years & 80% of performance for 15 years



Jighisol Systems Pvt Ltd

Empowering Future

# Technical Specifications

| Model Name                          | JS-340W/24V | JS-350W/24V | JS-360W/24V |
|-------------------------------------|-------------|-------------|-------------|
| Power Rating ( $P_{max}$ )          | 340         | 350         | 360         |
| Open Circuit Voltage ( $V_{oc}$ )   | 40.00       | 46.40       | 47.2        |
| Short Circuit Current ( $I_{sc}$ )  | 9.60        | 9.80        | 9.79        |
| Maximum Power Voltage ( $V_{max}$ ) | 36.90       | 37.50       | 38.9        |
| Maximum Power Current ( $I_{max}$ ) | 9.22        | 9.35        | 9.26        |
| Module Efficiency (%)               | 17.53       | 18.07       | 18.5        |

## Standards



## Other Features

Number of Cells: 72

High grade Mono Crystalline Cells.  
PID free product.

100% Electroluminescence (EL) tested.



Series fuse rating : 15A

Junction box : IP 65 / IP 67

Dimensions : 1962 x 992 x 40mm

10 years guarantee on product material and workman ship

25 years of product life.

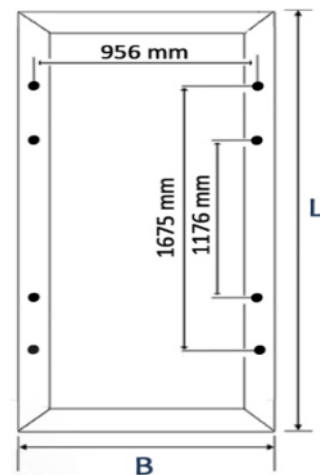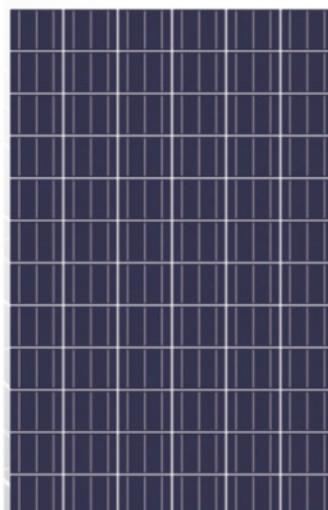

Note: Specifications subject to change without notice.

## Reach Us

### Manufacturing Unit:

Plot No:141, IDA Bollaram,  
Jinnaram mandal ,Hyderabad  
Telangana-502325

### Corporate office:

Plot No: 3, Vivekananda Nagar,  
Kukatpally ,Hyderabad  
Telangana-500072 ,PH: 040-48520535

Mail: [info@jighisol.com](mailto:info@jighisol.com) | [jighisol@gmail.com](mailto:jighisol@gmail.com) | [www.jighisol.com](http://www.jighisol.com)