

# Classic Series

C 7 III · 415-435W  
MWT Mono PERC Half-Cut Module

**21.3%**

Module efficiency up to 21.3%

## Features


- Aesthetic Design**  
 The design of busbar and tapping ribbon free makes module more aesthetic
- High Efficiency**  
 Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions
- Innovative Layout**  
 Innovative back contact module layout with asymmetric design for higher efficiency power
- High Reliability**  
 Conductive back sheet's 2D encapsulation avoids welding stress and micro crack, resulting lower degradation under multiple harsh testing conditions
- High ROI**  
 Single-glass modules with global 30-year performance warranty bring higher return on investment
- Lead Free**  
 Eco-friendly PV design achieves lead-free MWT module without soldering materials

## Reinsurance Coverage for 30 Years

**15 year**  
Quality Warranty

**30 year**  
Performance Warranty

Insured by PAIC and LLOYD'S  
**PING AN LLOYD'S**

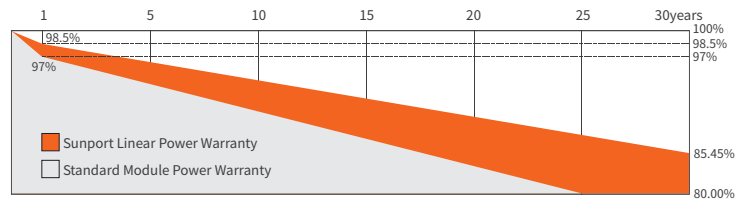

※1st year degradation less than 1.5%, 30 years linear power output 85.45% guaranteed.

## Comprehensive Qualifications & Certifications

- ★ ISO 9001: 2015 Quality Management System
- ★ ISO 45001: 2018 Occupation Health Safety Management System
- ★ ISO 14001: 2015 Environment Management System
- ★ CQC Top Runner Advanced Technology Certification (4A class)
- ★ TUV NORD Certification



## Electrical Characteristics at Standard Test Conditions(STC)

| Spec/Model                              | Unit | SPP415QHGH | SPP420QHGH | SPP425QHGH | SPP430QHGH | SPP435QHGH |
|---|------|------------|------------|------------|------------|------------|
| Max-Power(Pm)                           | W    | 415        | 420        | 425        | 430        | 435        |
| Power Tolerance                         | W    |            |            | 0~+5       |            |            |
| Max-Power Voltage(Vm)                   | V    | 39.2       | 39.4       | 39.6       | 39.8       | 40.0       |
| Max-Power Current(I <sub>m</sub> )      | A    | 10.59      | 10.66      | 10.73      | 10.80      | 10.88      |
| Open-Circuit Voltage(Voc)               | V    | 47.0       | 47.2       | 47.4       | 47.6       | 47.8       |
| Short-Circuit Current(I <sub>sc</sub> ) | A    | 11.18      | 11.26      | 11.34      | 11.42      | 11.50      |
| Module Efficiency(η <sub>m</sub> )      | %    | 20.3       | 20.6       | 20.8       | 21.1       | 21.3       |

STC: AM=1.5, Irradiation 1000W/m<sup>2</sup>, Module Temperature 25°C Power Production Tolerance ±3%

## Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

| Spec/Model                              | Unit | SPP415QHGH | SPP420QHGH | SPP425QHGH | SPP430QHGH | SPP435QHGH |
|---|------|------------|------------|------------|------------|------------|
| Max-Power(Pm)                           | W    | 305        | 309        | 313        | 317        | 321        |
| Max-Power Voltage(Vm)                   | V    | 36.4       | 36.6       | 36.8       | 37.0       | 37.2       |
| Max-Power Current(I <sub>m</sub> )      | A    | 8.38       | 8.44       | 8.51       | 8.57       | 8.63       |
| Open-Circuit Voltage(Voc)               | V    | 43.7       | 43.9       | 44.1       | 44.3       | 44.5       |
| Short-Circuit Current(I <sub>sc</sub> ) | A    | 9.05       | 9.11       | 9.17       | 9.23       | 9.30       |

NMOT: Irradiation 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1m/s

## Temperature Coefficient

|   |           |
|---|-----------|
| Nominal Module Operating Temperature        | 43±2°C    |
| Temperature coefficient of P <sub>max</sub> | -0.36%/°C |
| Temperature coefficient of Voc              | -0.28%/°C |
| Temperature coefficient of I <sub>sc</sub>  | 0.06%/°C  |

## Mechanical Characteristics

|                                 |   |
|---------------------------------|---|
| Dimension(L×W×H)                | 1973mmx1035mmx35mm  |
| Weight                          | 21.5kg  |
| Glass type                      | High transmittance anti-reflective coated tempered glass /3.2mm |
| Cell                            | 138(23x6) / Mono / Half-cell                                    |
| Encapsulant                     | EVA   |
| Frame                           | Anodized Aluminum Alloy / Silver                                |
| Junction box(protection degree) | IP68  |
| Cable                           | 4mm <sup>2</sup> ,350mm(+)/150mm(-) or Customized•Length        |
| Connector                       | MC4 Compatible  |


## Operating Conditions

|  |  |
|--|--|
| Max. system voltage                      | DC1500V(IEC)                               |
| Max. series fuse rating                  | 20A  |
| Operating temperature range              | -40°C~+85°C                                |
| Mechanical load                          | 5400Pa/2400Pa                              |
| Max. hailstone impact(diameter/velocity) | Φ25mm hail, from 1 m of distance at 23 m/s |
| Application Class                        | Class A                                    |

## Package

| Transportation | Container Size | Quantity(pcs) | Quantity(per pallet) |
|----------------|----------------|---------------|----------------------|
| Container      | 40' HQ         | 682           | 31                   |

## I-V Curve

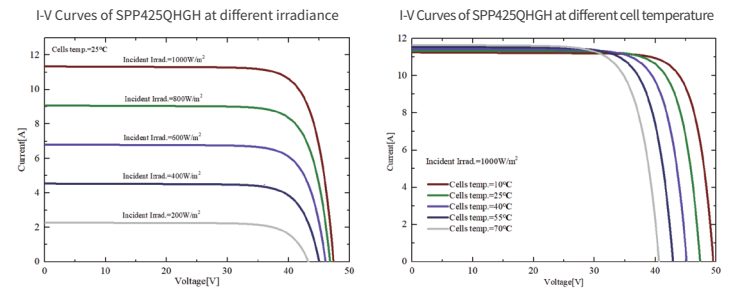

## Module Size

