

I'M • SOLAR® Serie

480M Bi-facial



108 cells monocrystallines



Anti-PID treatment / Hotspot protection



Positive tolerance 0-5%



high resistance to temperature variations



Design 100% in European

Warranty I'M SAFE® You are 3 times better protected

Serenity warranty

Serenity guarantee protects you against all mechanical, meteorological, fire and theft hazards. All I'M.SOLAR® solar panels benefit from this insurance for a period of 5 years. Serene, you are now insured against any unpredictable and sudden damage that can degrade your equipment.

Quality warranty

All I'M.SOLAR® products have a manufacturer's warranty. This manufacturer's warranty ensures against any manufacturing defect, quality defect and malfunction over a specific period of time. For solar panels the manufacturer's warranty is 30 years.

Linear performance warranty

I'M.SOLAR® guarantees a low linear performance decrease of only 0.3% / W each year. We are one of the few manufacturers in Europe to produce our own photovoltaic cells we are able to guarantee the performance of our solar panels over 25 years, applicable every year.



TECHNICAL FEATURES

Type	IM.S-BI-400M+80-BT10/54
Maximum Power (PMPP)	400 Wp + 80Wp
Maximale tension (VMPP)	30.35 V
Rated current (IMPP)	13.19 A
Open circuit voltage (VOC)	37.21 V
Current short circuit (ISC)	13.59 A

POWER GAIN	5%	10%	20%	30%
Total module power	420W	440W	480W	520W

TERMS OF USE


Maximale tension	DC 1000/1500V IEC
Operating temperature	-40°C / +85°C
Maximum reverse current	30 A
Maximum wind load/ snow max	2400/5400 Pa
Class of protection	IP67
Security class	II

MECHANICAL CHARACTERISTICS

Dimensions cells	P Type mono Bi-facial
Cell's number	6x18
Thickness glass per glass	2mm
Mass	25 kg
Dimensions (L x W x H)	1722 x 1134 x 30 mm
Junction box	TE Connectivity IP68
Cable length	1.1m
Cable section	4mm
Number of diodes	3
connector	MC4 or equivalent
Frame	Black anodized alu frame
Packaging	36 pcs./pallet

TEMPERATURE COEFFICIENTS

Temperature coefficient of temperature	(β) -0,246%/°C
Temperature coefficient of current	(α) +0,0448%/°C
Temperature coefficient of puissance	(δ) -0,330%/°C

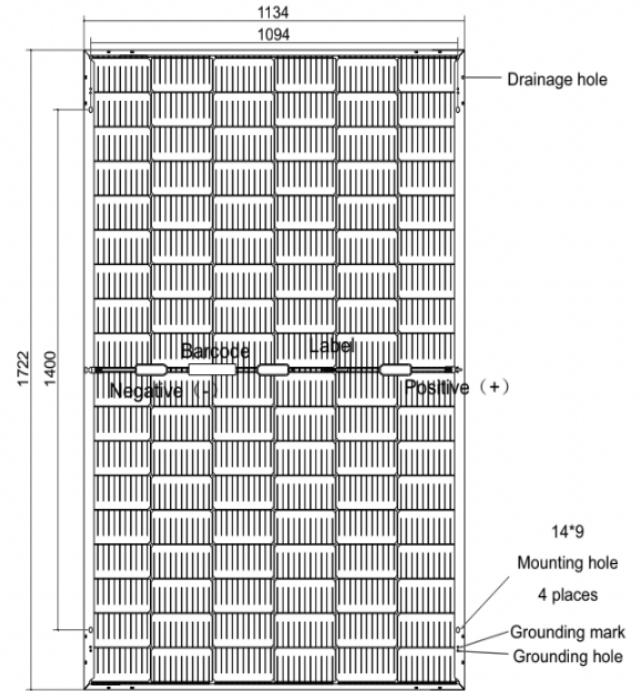

(Back side)
Note:mm

