


StoraXe® Storage systems for industry and infrastructure PowerBooster

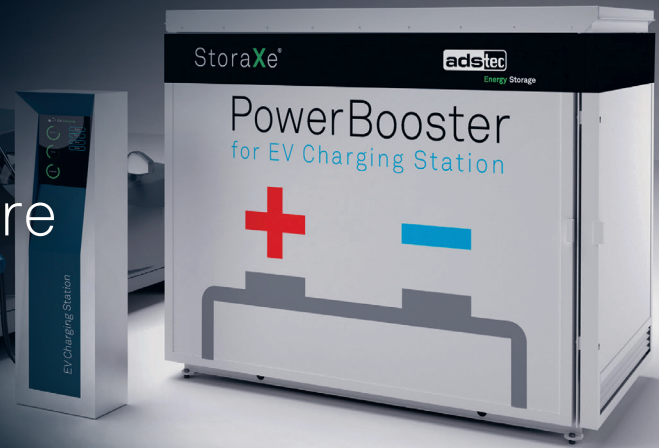

StoraXe® Industrial & Infrastructure PowerBooster

With its PowerBooster battery storage system, ADS-TEC offers grid services in the industrial and infrastructure sector and delivers, for example, high capacities for fast-charging stations on limited-power network connections. Storage system capacities in the standard configurations cover bandwidths of 120 to 240 kWh.

HIGHLIGHTS

- Outdoor installation directly at the location of use
- Compact design, easy to transport
- High performance (up to 280 kW)



PowerBooster

Big-LinX® Energy The cloud solution for decentral energy systems

- Global access to any energy storage system
- »State of the art« security (software and hardware certificates with crypto smart card)
- Control and battery monitoring
- OSGi™ platform for your own programme extensions
- Interfaces to SCADA and HOST systems of energy supply and facility management systems

StoraXe® PowerBooster The compact storage system in distribution networks

- Integrated inverter, climate control, energy management unit, security/firewall and communication unit via mobile radio
- Direct AC connection to distribution grids at 400 V level
- Fast integration and individual adaptation to customer projects

Areas of application

- Provision of power for fast-charging stations
- High Power Charging (HPC)
- Local physical grid services such as peak capping, frequency regulation, dynamic flexibility yield, reactive power, etc.
- District alternative to individual home storage systems for the optimisation of individual consumption
- Networking of decentralised units to form powerful clusters

Options

- Control and energy management platform for individual integration
- Individual services and »performance warranty« over long periods

PowerBooster

Technical data

		GSS1212	GSS2824
System	System type Control / functions Network connection Inverter	AC container storage system ADS-TEC master interface or ADS-TEC energy apps Ethernet, RJ45 integrated	
Grid connection	Effective power Apparent power Emergency power / black start Mains voltage Grid type Grid frequency	100 kW 120 kVA optional / optional 400 VAC 3-phases, TN 50 Hz	280 kW 280 kVA optional / optional 400 VAC 3-phases, TN 50 Hz
Battery storage system	Battery technology Nominal energy content Capacity	Lithium-ion 120.7 kWh 159 Ah	Lithium-ion 241.4 kWh 159 Ah
Battery cells¹	Cell manufacturer Cell capacity Cell chemistry Specified cycles up to 80% of residual capacity Expected life cycle	SK innovation 53 Ah Lithium-NMC 13,000 (2C/2C at 23 °C with 80 % DOD) 20 years	
General data	Installation location Temperature range Humidity Protection class battery room casing Dimensions L x W x H Weight Guarantee of current market value (battery cells)	Outdoors, integrated climate control -15 to 40 °C < 90 %, Non-condensing IP64 IP44 1,880 x 1,770 x 2,320 mm Approx. 5.5 t up to 10 years	Outdoors, integrated climate control -15 to 40 °C < 90 %, Non-condensing IP64 IP44 2,740 x 1,650 x 2,320 mm Approx. 7.8 t up to 10 years

Standards

Safety (functional and electrical): EN 50272-1:2010; EN 50581:2012
Transport: UN38.3 transport directive for lithium batteries
Grid directive: VDE-AR-E-2510-2, VDE-AR-N-4105

¹ Information according to data sheet provided by the cell manufacturer

StoraXe® battery storage solutions **Technology for Professionals**

- Individual design and planning by ADS-TEC specialists
- Speak with us – together we can specify your solution

ads-tec Energy GmbH
 Heinrich-Hertz-Strasse 1
 D-72622 Nuertingen
 Phone +49 70 22 25 22-201
 Fax +49 70 22 25 22-406
 energy@ads-tec.de
 www.ads-tec.de

