
THPW600-ETL 600WATT / 1200WATT PEAK POWERS UP TO 6 AMPS





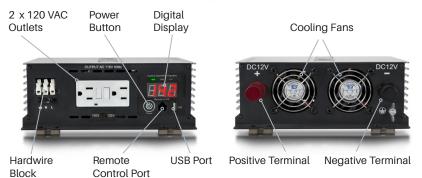

Specifications

DC Input Voltage	12 Vdc
DC Input Voltage range	10.7 - 16.5 Vdc
Maximum Output Current	6 Amps
Continuous Output Power	600 Watts
Max Output for 10 Min - 10% over inverters rated continuous wattage	650 Watts
Surge Output Power	1200 Watts
Peak Efficiency	85-90%
DC Input Connections	Nut and Bolt (M9)
AC Output Connection	2 x GFCI Protected 120 Volt AC outlets
Terminal Block for Hardwiring	Yes
Display	Digital Display With Error Codes

PURE SINE WAVE INVERTER

THOR inverters have set the standard with the way you deal with your mobile power needs, providing AC electricity. A power inverter converts the DC electricity from batteries into everyday AC power.

With a THOR inverter you won't need to rely on a generator to havepower for tools, electronics or any AC power needs. THOR inverters are efficient and dependable and come in numerous sizes and power ranges to meet your mobile power demands.

Design Features

- 600 Watts Continuous Output
- 1200 Watt High Surge Power
- 2 x GFCI Protected 120 Volt AC Outlets
- Compatible with all THOR Remote Controls
- USB Charging Port
- Rugged Aluminum Design
- Compatible with Appliances <= 600 watts
- Digital Display
- Easy Installation

Accessories







Remote Controls -



Cables (4AWG - 10 Feet) THCBL10F4AWG



AC Extension



Fuses THANLFB60 60 Amp Fuse



Low Voltage Disconnect TH-LVD




THI-80 80 Amp Isolator



Transfer Switch THTS30



3.1"——3.42"

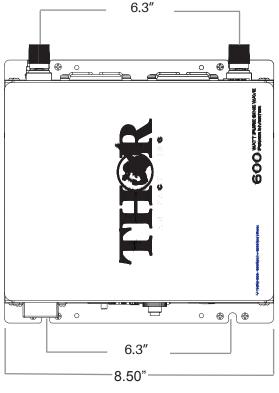




Dimensions: $8.5L \times 8.5W \times 3.34"H$

Weight: 4.7 Lbs


UPC Code: 852090008783

Warranty: 1 Year


Installation Diagrams



STAND ALONE OR IN VEHICLE



VEHICLE IGNITION CONTROLLED



ISOLATING VEHICLE BATTERY

Inverters are also available as Installation Kits (including the inverter)

THPW600-ETL-KIT 2



THPW600-ETL-KIT 3



THPW600-ETL-PRO KIT



THPW600-ETL-RV KIT



