

ELECTRICAL PERFORMANCE

All specified Parameters are at STC 25°C Ambient, 1000W/m² irradiance and AM 1.5

Type		PR-240P6-60	PR-245P6-60	PR-250P6-60	PR-255P6-60	PR-260P6-60	PR-265P6-60	PR-270P6-60
Power Output	Pmax(W)	240	245	250	255	260	265	270
Power Output Tolerance	Pmax(%)	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3	0~+3
Max-Power Voltage	Vmp(V)	29.27	29.61	29.95	30.29	30.63	30.96	31.22
Max-Power Current	Imp(A)	8.21	8.28	8.35	8.42	8.49	8.56	8.65
Open-Circuit Voltage	Voc(V)	37.35	37.51	37.63	37.83	37.97	38.13	38.23
Short-Circuit Current	Isc(A)	8.79	8.84	8.90	8.97	9.05	9.10	9.13
Cell Efficiency	(%)	16.8	17.1	17.5	17.8	18.2	18.5	18.9
Module Efficiency	(%)	14.8	15.1	15.4	15.7	16.0	16.3	16.6

THERMAL CHARACTERISTICS

Nominal Operating Cell Temperature	NOCT(°C)	45±2
Temperature Coefficients of Pmax	(%/°C)	-0.420
Temperature Coefficients of Voc	(%/°C)	-0.304
Temperature Coefficients of Isc	(%/°C)	0.040

OPERATING CONDITIONS


Maximum System Voltage	(VDC)	1000V(IEC)
Maximum Series Fuse	(A)	15
Operating Temperature	(°C)	-40~+85
Maximum Load(snow/wind)		5400pa/2400pa

MECHANICAL CHARACTERISTICS

Solar cells(type/dimension)	Poly-Crystalline Silicon/156mm*156mm
Cells number	60pcs(6*10)
Front cover(material/thickness)	Low iron tempered glass/3.2mm
Backsheet(color)	White
Frame(material/color)	Anodized aluminum alloy/Silver
Junction box(Protection degree)	≥ IP65
Cables/Plug Connector	Diameter 4mm ² , Length 900mm/MC4 or MC4 compatible
Module Dimension	1640×992×40mm
Module Weight	19kg

PACKING DETAILS

Container	20'GP	40'HQ
Pieces per pallet	52	56
Pallets per container	6	14
Pieces per container	312	784

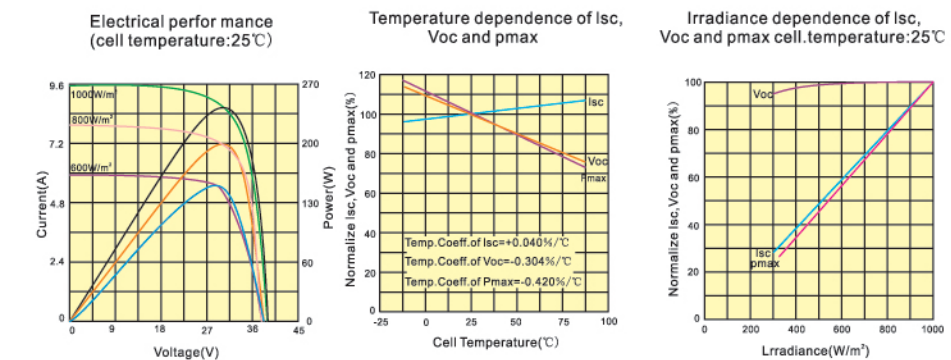


PR-270P6-60

Poly-Crystalline Solar Module
240-270 Watt 6inch 60cells

- High conversion efficiency
High module efficiency to guarantee power output
- Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.
- Self-cleaning glass
Coating glass for self-cleaning, reduce surface dust
- 0 to +3% positive tolerance
Detailed information in Electrical Specifications
- Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy
- 48-hour response service

LINEAR PERFORMANCE WARRANTY

25 years power output guarantee insured by the Willis insurance

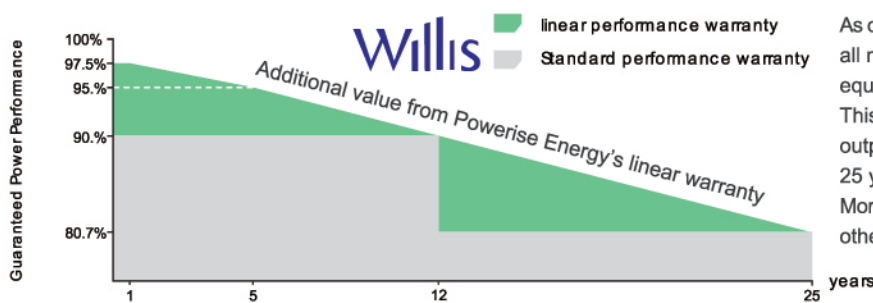

As one of the first manufactures worldwide all modules from Powerise Energy are equipped with the new Willis insurance. This means you can rely on an insured output of 90% for 12 years and 80% for 25 years. More security cannot be achieved by any other insurance.

