



BEP-300



12 year product warranty



25 year linear performance warranty



100 % electroluminescence inspection



Guaranteed positive power tolerance



Maximum 8000 Pa snow load



IP68 junction box available,
long-term weather endurance



Innovative solution: anti-reflective coating for high
sunlight absorption



Potential Induced Degradation FREE



High quality components



Packing system to avoid
micro cracks



Light Induced Degradation FREE



4 busbars



Ammonia
resistance certificate

Salt water mist
resistance certificate

Fire resistance certificate



TECHNICAL SPECIFICATIONS **BEP-300**

Electrical Characteristics

Maximum power [Pmax]	300 Wp
Cells	Polycrystalline
Nr of cells	72
Short circuit current [Isc]	8,95 A
Open circuit voltage [Voc]	44,20 V
Maximum power current [Imax]	8,40 A
Maximum power voltage [Vmax]	35,80 V
Module efficiency	15,43 %
Maximum system voltage	1000 VDC
Tolerance	0 +4,99 Wp
Temperature coefficient current TcI	0,049 %/°C
Temperature coefficient voltage TcV	-0,30 %/°C
Power temperature coefficient TcP	-0,40 %/°C
NOCT (800 W/m ² , 20°C, AM 1.5, 1m/s)	42±2 °C

Qualification test parameters

Maximum load*	5400 Pa
Wind load	2400 Pa
Application class	A

Irradiance dependence

[W/m ²]	1000	800	600	400	200
Isc	0 %	-19,94 %	-39,75 %	-59,68 %	-79,68 %
Voc	0 %	-1,13 %	-2,52 %	-4,48 %	-7,74 %


Physical characteristics

Length	1960 mm
Width	992 mm
Thickness	40 mm
Weight	21,3 kg
Junction box	IP67
Bypass diodes	3
Reverse current protection	15 A


Packing

Packing method	Quantity	Transport
Cartoon 2x1,2 m	26 pieces/pallet	26 pallets/truck

CURRENT-VOLTAGE CHARACTERISTICS

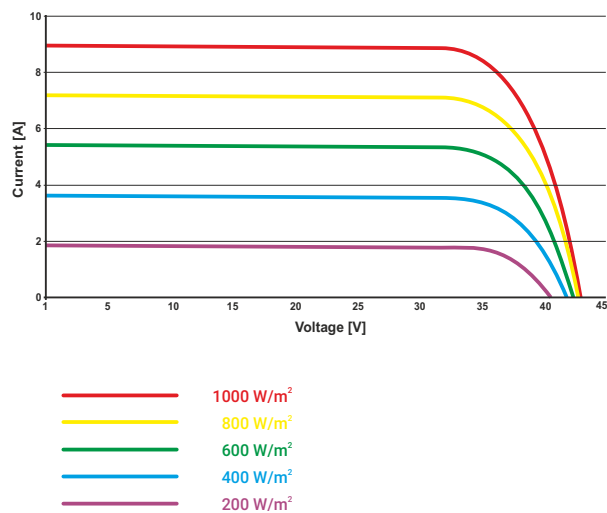

BRUK-BET SOLAR WARRANTY

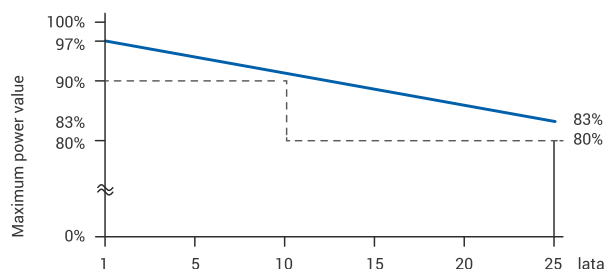

— Additional warranty provided by Bruk-Bet Solar
 - - - Typical market guarantee

