


## MONOCRYSTALLINE SILICON MODULE

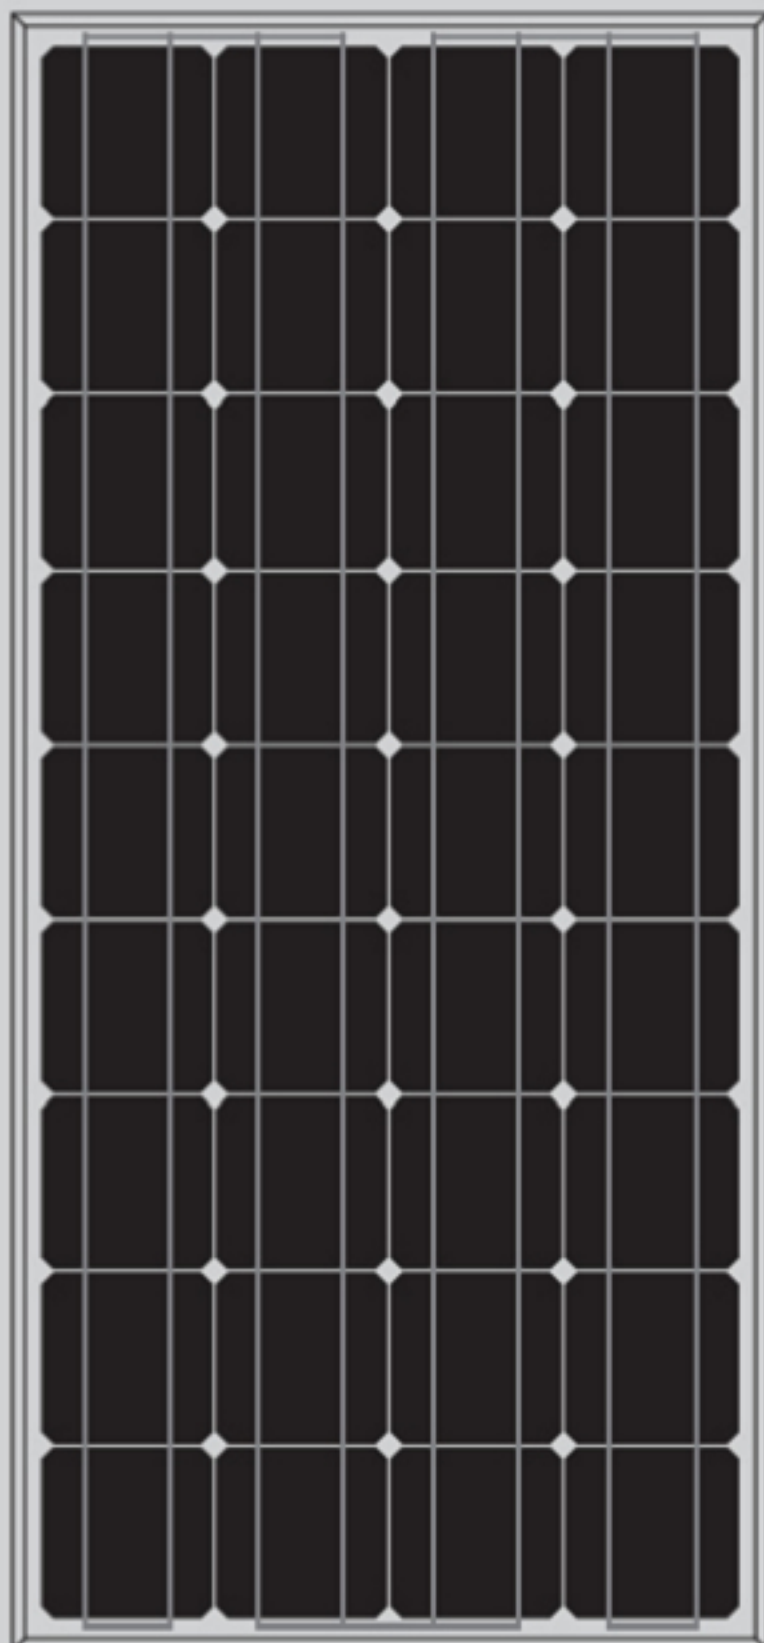

GREENERGY POWER  
SOLAR TECHNOLOGY

# GP-90 GP-95 GP-100

## MONOCRYSTALLINE SILICON MODULE

### Products Characteristics



Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w

### Warranty


- 5 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

# GP-90 GP-95 GP-100




**GREENERGY POWER**  
SOLAR TECHNOLOGY

Engineering Drawings (Front Side)

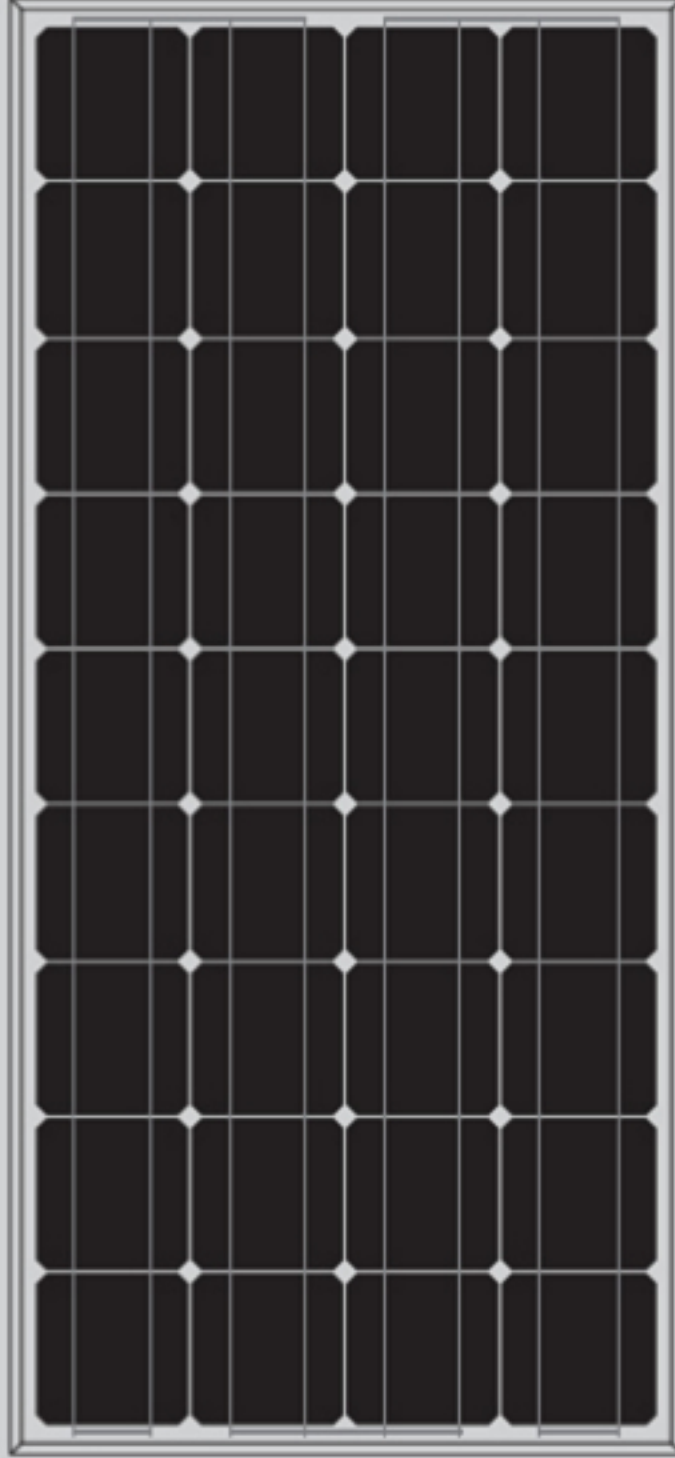

Engineering Drawings (Back Side)

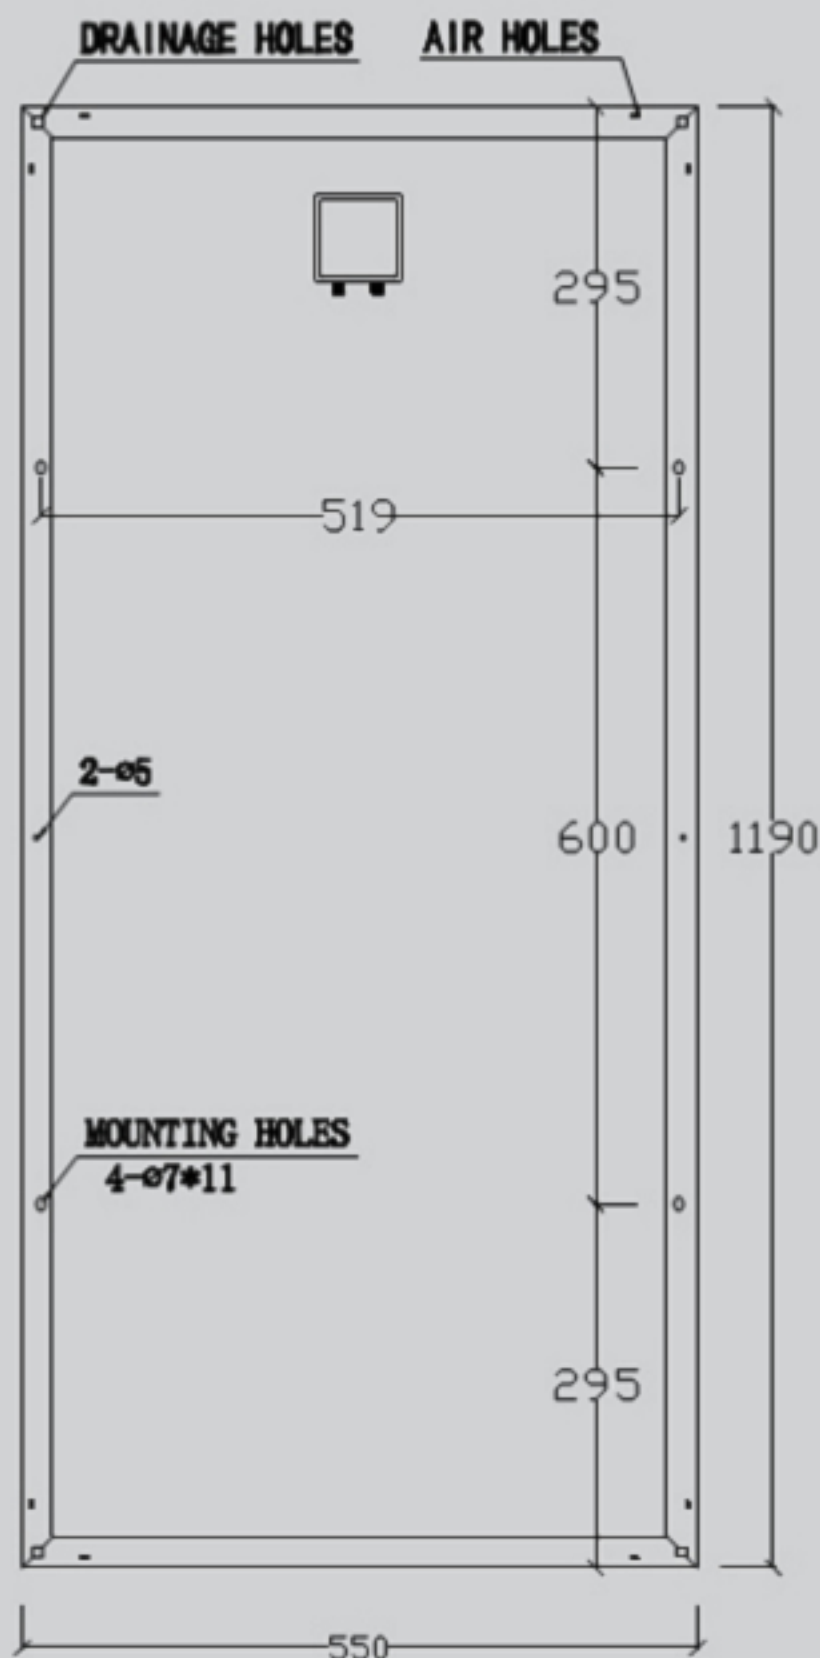

## Raw materials and Mechanical Parameters

	GP-90	GP-95	GP-100
Type of Cells(mm)		mono125x125	
NO. of Cells and Connections		4x9=36	
Dimensions(mm)(L*W*H)		1190x550x30	
Weight(kg)		8	
Glass		3.2mm Tempered Glass	
Encapsulation		EVA	
Backsheet		Multilayer Composite	
Aluminium-Frame		Silvery/Black Anodized aluminium alloy	
Junction-Box		IP65/IP67	
Cable		NA, but customized is acceptable	
Connector		NA, but MC4 and MC4 Compatible are acceptable	
Package Configuration		4 pcs/ctn	

## Performance Parameters

	GP-90	GP-95	GP-100
Maximum System Voltage		700V	
Operating Temperature		-45~+80°C	
Maximum Series Fuse		10A	
Maximum Static Load, Front Side (e.x. Snow, Wind)		5400Pa	
Maximum Static Load, Back Side (e.x. Wind)		2400Pa	
Application Grade		Class A	

## Electrical Parameters (Standard Test Condition)

	GP-90	GP-95	GP-100
Rated Maximum Power(Mp)	90W	95W	100W
Power Tolerance		0-5Wp	
Cell Efficiency	16.2%	17.1%	18.0%
Open Circuit Voltage(Voc)	22.2V	22.3V	22.4V
Maximum Power Voltage(Vmp)	17.4V	17.6V	17.8V
Short Circuit Current(Isc)	5.33A	5.62A	5.79A
Maximum Power Current(Imp)	5.17A	5.40A	5.62A
Temperature Coefficient of Isc		+0.06%	
Temperature Coefficient of Voc		-0.33%	
Temperature Coefficient of Pmp		-0.45%	
Standard Test Condition	Irradiance:1000W/M2, Cell Temperature:25°C, Spectrum AM:1.5		

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.