

GIN P6F-72

GINTECH

72 Cells

Polycrystalline Module

310~330W

Power Output Range

17.0%

Maximum Efficiency

0~+5W

Positive Power Tolerance

Gintech Energy Corporation

GINTECH was established in 2005, headquartered in Taiwan as public listed company which has been one of the global leading manufacturers of solar CELL and MODULE.

Our core competence harmonizes the complete process chain in developing and manufacturing PV Modules with reliable quality and performance for worldwide residential, commercial and utility-scale projects.



Key Features



High Mechanical Loads of Wind and Snow

Certified to bear 2,400Pa wind load, and 5,400Pa snow load



Excellent Low Light Performance

On cloudy days, mornings and evenings



Highly Resistant to Salt-mist Corrosion

IEC-61701, Ed 2.0 certified



Resistant to Ammonia Corrosion

IEC-62716 certified



Resistant to PID (Potential Induced Degradation) effect

Qualified cell & materials lead to 60°C, 85%RH, -1000V, 96hr certified




100% EL Double Inspection

Defect-free in module-level



25 Years Linear Warranty of Power Output

Plus 10 years product warranty

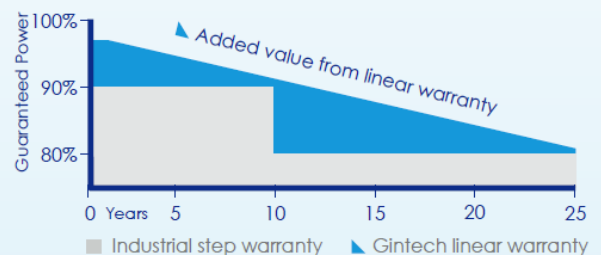

GIN P6F-72

Polycrystalline module

ELECTRICAL CHARACTERISTICS : STC

Power Rating (Pmax) (W)	310	315	320	325	330
Open Circuit Voltage (Voc) (V)	45.3	45.7	46.0	46.2	46.4
Short Circuit Current (Isc) (A)	9.07	9.12	9.20	9.24	9.31
Max Power Voltage (Vmp) (V)	36.4	36.8	37.0	37.4	37.6
Max Power Current (Imp) (A)	8.52	8.56	8.64	8.70	8.77
Module Efficiency (%)	16.0	16.2	16.5	16.7	17.0

STC (Standard Test Condition) : Irradiance of 1000W/m², AM1.5G and cell temperature (25±2)°C

ELECTRICAL CHARACTERISTICS : NOCT

Power Rating (Pmax) (W)	227	231	235	239	243
Open Circuit Voltage (Voc) (V)	42.3	42.6	42.9	43.2	43.5
Short Circuit Current (Isc) (A)	7.12	7.18	7.24	7.30	7.36
Max Power Voltage (Vmp) (V)	33.2	33.4	33.6	33.8	34.0
Max Power Current (Imp) (A)	6.83	6.91	6.99	7.07	7.15

NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

MECHANICAL DATA

Solar cells	6" Polycrystalline 156 x 156 mm
Cell connection	72 cells (6 x 12)
Module dimension (mm / Inch)	1956 x 992 x 40 mm / 77.01" x 39.06" x 1.57"
Weight (kg / lb)	21.7 / 47.84 (approx.)
Glass	High transparency tempered glass 3.2mm (0.13")
Frame	Anodized aluminium alloy
J-Box	IP-65 or IP-67 rated, 3 diodes
Cables	Length 1,000mm * diameter 4mm ² each
Connector	PV4-S
Packaging configuration	26pcs / pallet

Packing : 26pcs/pallet, 728pcs/40' HQ container.

WORKING CONDITIONS

System voltage (DC)	IEC : 1000V / UL : 1000V
Series fuse rating	15A
Temperature cycling range	-40~85°C
Static load	5400Pa
Application class	Class A

TEMPERATURE DATA

NOCT	46±2°C
Temp Coefficient of Voc (%/°C)	-0.33
Temp Coefficient of Isc (%/°C)	0.06
Temp Coefficient of Pmax (%/°C)	-0.43

WARRANTY

25 Years on Performance Linear Warranty

10 Years on Limited Product Warranty


CERTIFICATES




GINTECH ENERGY CORPORATION

ADD:9F, No.295, Tiding Blvd. Sec2 Taipei City 11493, Taiwan, R.O.C. TEL:+886-2-2656-2000
 FAX:+886-2-2656-0593 EMAIL:modulesales@gintech.com.tw WEB:http://www.gintechenergy.com


MODULE DIMENSION

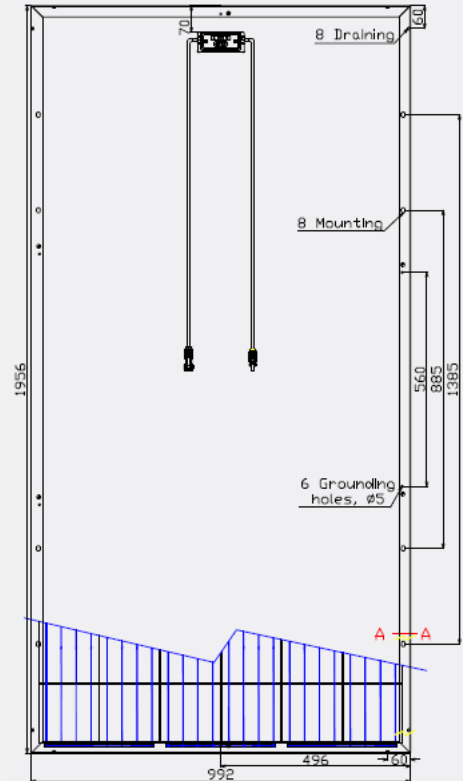

section A-A



I-V curve on Irradiance Level

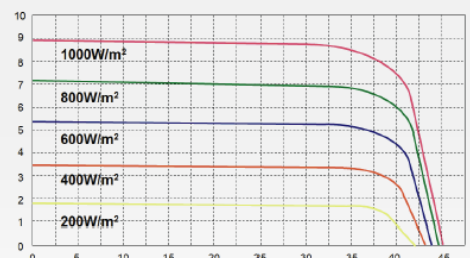

The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types