


THE TALLMAX

FRAMED 72-CELL MODULE (1500V)

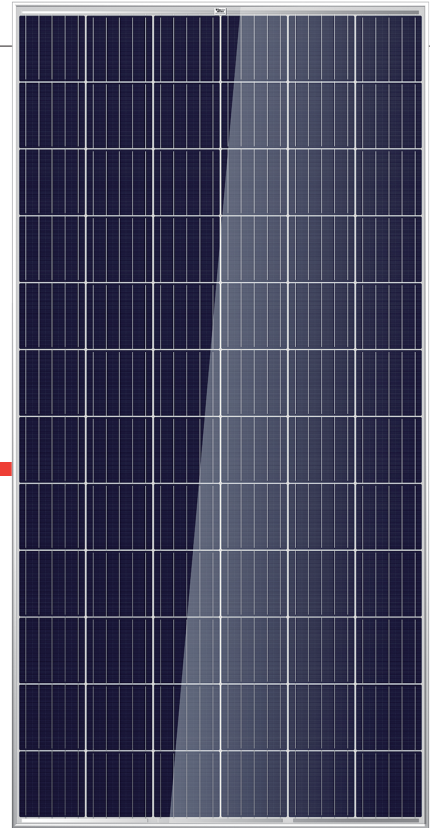

72 CELL
MULTICRYSTALLINE MODULE

320-340W
POWER OUTPUT RANGE


17.5%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse gases Emissions Verification
 OHSAS 18001: Occupation Health and Safety Management System

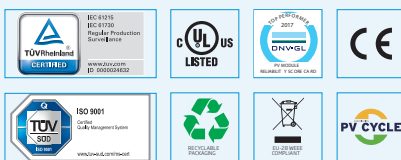

Ideal for large scale installations

- Reduce BOS cost by connecting more modules in a string
- 1500V UL/1500V IEC certified



One of the industry's most trusted modules

- Field proven performance



Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- 100% EL double inspection




Certified to withstand the most challenging environmental conditions

- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h



LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

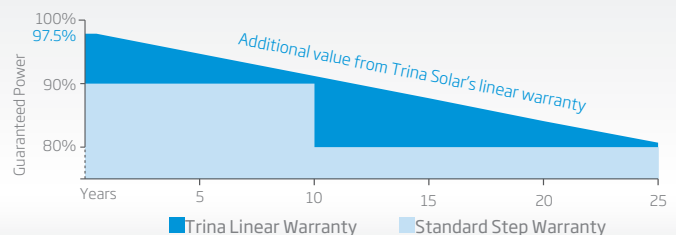


PRODUCTS | **POWER RANGE**
TSM-PE14A | 320-340W


DIMENSIONS OF PV MODULE(mm/Inches)

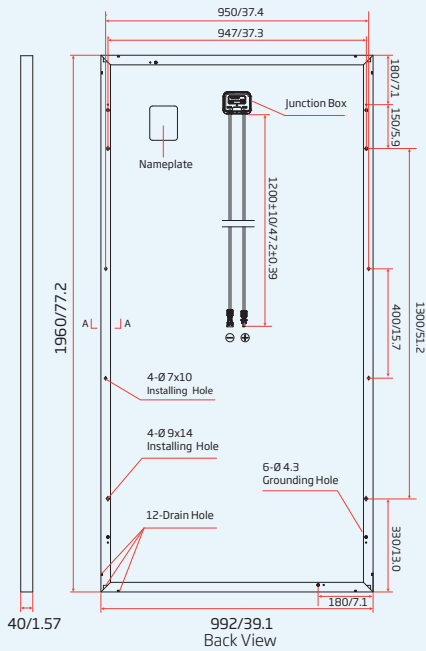

I-V CURVES OF PV MODULE(335W)

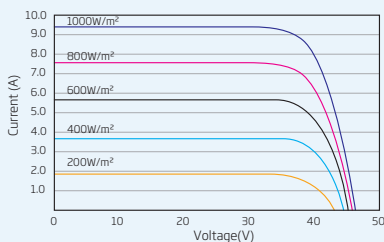

P-V CURVES OF PV MODULE(335W)

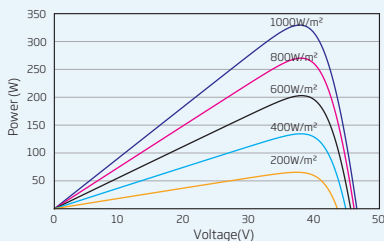

ELECTRICAL DATA (STC)

Parameter	320	325	330	335	340
Peak Power Watts- P_{MAX} (Wp)*	320	325	330	335	340
Power Output Tolerance- P_{MAX} (W)	0 ~ +5				
Maximum Power Voltage- V_{MPP} (V)	37.1	37.2	37.4	37.6	37.8
Maximum Power Current- I_{MPP} (A)	8.63	8.73	8.83	8.91	8.99
Open Circuit Voltage- V_{OC} (V)	45.5	45.6	45.8	46.0	46.2
Short Circuit Current- I_{SC} (A)	9.15	9.19	9.28	9.35	9.42
Module Efficiency η_m (%)	16.5	16.7	17.0	17.2	17.5

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AML5.
*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Parameter	237	241	245	249	252
Maximum Power- P_{MAX} (Wp)	237	241	245	249	252
Maximum Power Voltage- V_{MPP} (V)	34.3	34.4	34.6	34.8	35.0
Maximum Power Current- I_{MPP} (A)	6.92	7.00	7.08	7.14	7.21
Open Circuit Voltage- V_{OC} (V)	42.1	42.2	42.4	42.6	42.8
Short Circuit Current- I_{SC} (A)	7.39	7.42	7.49	7.55	7.60

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Multicrystalline 156.75 × 156.75 mm (6 inches)
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1960 × 992 × 40 mm (77.2 × 39.1 × 1.57 inches)
Weight	22.5 kg (49.6 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Silver Anodized Aluminium Alloy
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), 1200 mm (47.2 inches)
Connector	Trina TS4
Fire Type	Type 1 or Type 2

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.41%/°C
Temperature Coefficient of V_{OC}	-0.32%/°C
Temperature Coefficient of I_{SC}	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	15A

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

10 year Product Workmanship Warranty

25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 27 pieces

Modules per 40' container: 648 pieces