




## SOLAR PHOTOVOLTAIC MODULES

### Aditi's Photovoltaic Modules

- ★ High efficiency, Mono or Multi crystalline solar cells with high transmission and textured glass delivering a module series efficiency of up to 14.3%, minimizing installation costs and maximizing the kWh output of your system per unit area.
- ★ High quality, low iron, high transmissivity, tempered and toughened glass to ensure high light absorption.
- ★ Tin Copper interconnect increases Solderability and Conductivity. This also results in maximum output efficiency from the Module.
- ★ Premium quality encapsulation material ensuring high quality lamination leading to better performance.
- ★ Polyster tedlar used as a back sheet prevents from moisture and mechanical damage.
- ★ Weather resistant frame - seal helps preventing water seepage and protects the system from humidity.
- ★ Anodized Aluminum frame gives the system strong, corrosion-free structural support.
- ★ Produced in an ISO 9001:2008 & 14001:2004 certified production facilities.
- ★ Certifications: IEC 61215, IEC 61730-1&2, IEC 61701.
- ★ Warranty,
  - a) 90% of the rated power is guaranteed for a period of 10 years.
  - b) 80% of the rated power is guaranteed for a period of 25 years.

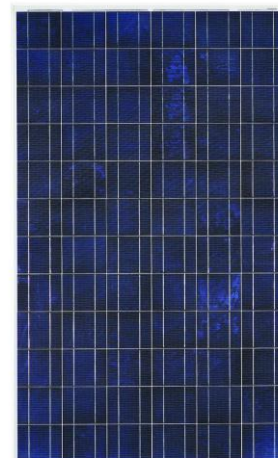


#### Model No: ADT 24250

#### Electrical Specifications:

Product Description	<b>24V - 250WP</b>
Rated POWER <b>Pmax - [W]</b>	<b>250.00</b>
Rated Voltage <b>Vmax - [V]</b>	<b>35.00</b>
Rated Current <b>I<sub>max</sub> - [A]</b>	<b>7.14</b>
Open Circuit Voltage <b>V<sub>oc</sub> - [V]</b>	<b>43.00</b>
Short Circuit Current <b>I<sub>sc</sub> - [A]</b>	<b>7.64</b>
Module Efficiency <b>η - [%]</b>	<b>14.00</b>
Tolerance	<b>± 3%</b>

Standard Test Conditions: Irradiance 1000 W/ m<sup>2</sup>, Module temperature 25°C, Spectrum AM 1.5

#### Module IV-Curve:

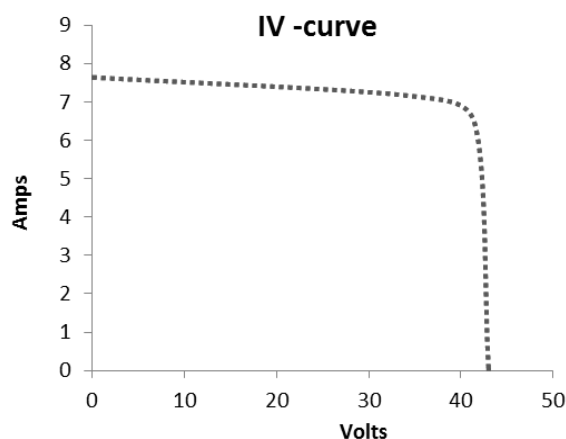

#### Temperature Coefficients


Voltage V <sub>oc</sub>	: -0.33%/K
Current I <sub>sc</sub>	: +0.06%/K
Power P <sub>max</sub>	: -0.40%/K

Maximum system voltage	: 1000 V DC
Operating Module Temperature	: -40°C to +85°C
NOCT	: 47°C ± 2°C

#### Certifications



### Module Drawing & Mounting details:

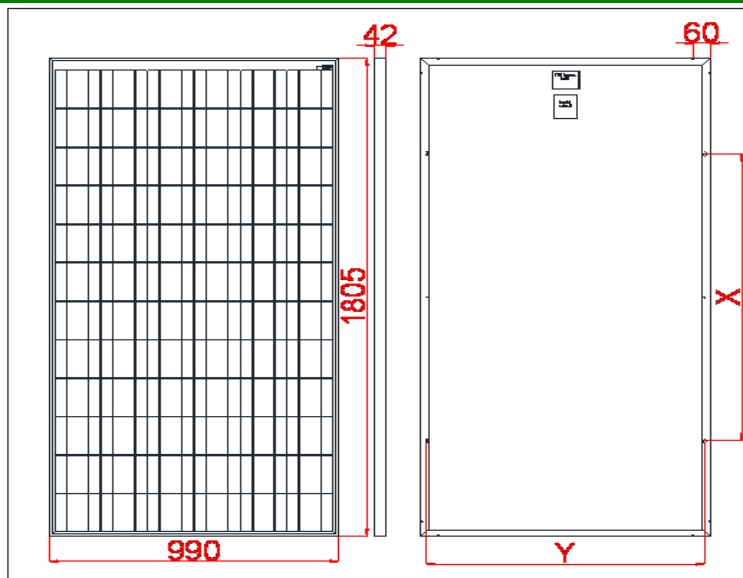

### Mechanical Specifications:

Length [mm]	1805 $\pm$ 2
Width [mm]	990 $\pm$ 2
Thickness [mm]	42
X [mm]	1085 $\pm$ 2
Y [mm]	950 $\pm$ 2
Mounting hole	10X7 mm slot
Earth hole	5mm dia
Drain hole	5mm dia
Aprox. weight [Kg]	22.25
No. of cells	72

### Other Characteristics:

Cell type	Mono / Multi Crystalline
Front Glass	Toughened Textured Glass
Glass thickness	3.2 mm
Cell Encapsulation	EVA (Ethylene Vinyl Acetate)
Back sheet	Poly vinyl Fluoride
Frame	Anodized, Extruded Aluminum frame
Junction Box	Nylon / ABS moulded 4 rail junction box with bypass diodes & cables

**Due to continuous upgradation of products, specifications mentioned are subject to change without prior notice.**



**Plot No: 17, ALEAP Indust. Estate, Gajula Ramaram, Qutbullapur (M), R.R.Dist., HYDERABAD 500090, ANDHRA PRADESH – INDIA TEL: +91-40-2004 0285 MOB: +91-8978854777 / 555**

WEBSITE: [www.aditisolar.in](http://www.aditisolar.in), EMAIL: [marketing@aditisolar.in](mailto:marketing@aditisolar.in), [spvprojects@aditisolar.in](mailto:spvprojects@aditisolar.in)