



SP275W-30V

POLYCRYSTALLINE

Key features:



PID Free Module:
Anti-PID cell and encapsulation technology
Frameless module requires no module grounding which may PID



Higher Lifetime Power Yield:
<0.5% annual power degradation
30 year linear power warranty



Saving BOS Cost:
Designed for high voltage systems of up to 1500 VDC, saving BOS cost



Improved Durability and Reliability:
Dual glass reduces micro-cracking, small trails, corrosion caused by moisture, sand, salt mist, acid, alkali, etc.





Less Maintenance Requirement:
Reduce soiling and snow coverage requires less maintenance and enhances fire safety



Aesthetically Pleasing Design:
White back sheet maximizes module efficiency up to 16.84% (60-poly max. output 275W). Transparent back sheet increases light transmission, ideal for installations requiring light to pass through



Strengthened Mechanical Support:
5400 Pa snow load, 2400 Pa wind load

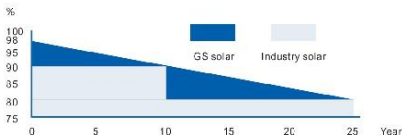

Module Diagram

Module Models

Electrical Specifications

Model	SP275W-30V
Peak power(Pmax)	275W
Cell Efficiency	20.04%
Max. power volt.(Vmp)	31.25V
Max. power current(Imp)	8.81A
Open circuit volt.(Voc)	38.65V
Short circuit current(Isc)	9.31A
Power Tolerance	0~+3%
Max. system voltage	1000V
Series fuse rating(A)	15
Number of bypass diode	3
Operating temperature	-40°C to +85°C
Maximum system voltage	1000V DC

STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Mechanical Characteristics

Dimensions	1650*990*40mm
Weight	17.4kg
Solar Cells	60 cell in series
Cable	LAPP (4mm ²)
lengths	900mm(-) and 900mm(+)
Connector	Mc4 Plug Type
Glass type	High transmits, Low Iron, 3.2mm Tempered Glass
Frame	Aluminium-alloy