


UKS-6P PERC

POLYCRYSTALLINE MODULE

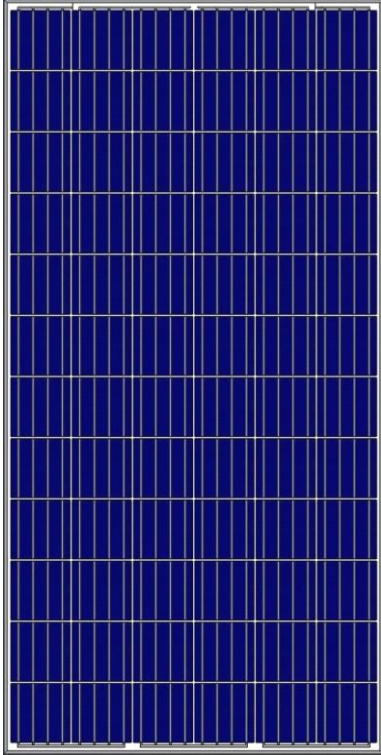

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 17.78% by using Passivated Emmitter Rear Contact (PERC) technology.
- Low degradation and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.
- Positive power tolerance of 0 ~ +3 %.

CERTIFICATIONS


- IEC61215, IEC61730, IEC62716, IEC61701, CE, CQC, CGC, ETL(USA), JET(Japan), J-PEC(Japan), Kemco(South Korea), KS(South Korea), MCS(UK), CEC(Australia), CSI Eligible(CA-USA), Israel Electric(Israel), InMetro(Brazil), TSE(Turkey)
- ISO9001:2008: Quality management system
- ISO14001:2004: Environmental management system
- OHSAS18001:2007: Occupational health and safety management system



**30 YEAR
BRITISH
WARRANTY**

SPECIAL WARRANTY

- 12 years limited product warranty.
- Limited linear power warranty: 12 years 91.2% of the nominal power output, 30 years 80.6% of the nominal power output.

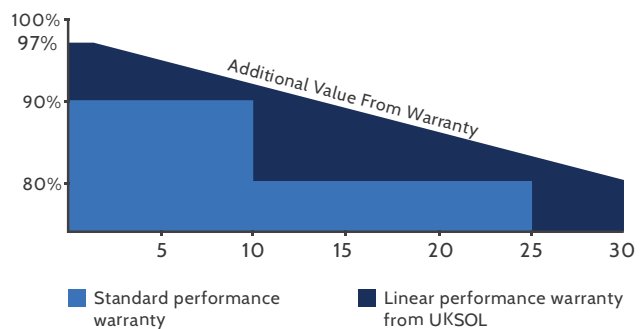

LOW RISK BRITISH
PROCUREMENT



BRITISH TECHNICAL
SUPPORT



ALWAYS GRADE
"A" CELLS



BRITISH QUALITY
STANDARDS

THAMES VALLEY
CHAMBER OF
COMMERCE GROUP
•MEMBER•



ELECTRICAL CHARACTERISTICS AT STC

Nominal Power (P_{max})	330W	335W	340W	345W
Open Circuit Voltage (V_{OC})	45.9V	46.1V	46.3V	46.5V
Short Circuit Current (I_{SC})	9.36A	9.44A	9.52A	9.60A
Voltage at Nominal Power (V_{mp})	37.3V	37.5V	37.7V	37.9V
Current at Nominal Power (I_{mp})	8.85A	8.94A	9.02A	9.11A
Module Efficiency (%)	17.01	17.26	17.52	17.78
Operating Temperature	-40°C to +85°C			
Maximum System Voltage	1000V DC			
Fire Resistance Rating	Type 1 (in accordance with UL1703)/Class C (IEC61730)			
Maximum Series Fuse Rating	15A			

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

ELECTRICAL CHARACTERISTICS AT NOCT

Nominal Power (P_{max})	244W	248W	252W	256W
Open Circuit Voltage (V_{OC})	42.2V	42.4V	42.6V	42.8V
Short Circuit Current (I_{SC})	7.58A	7.65A	7.71A	7.78A
Voltage at Nominal Power (V_{mp})	33.9V	34.1V	34.3V	34.5V
Current at Nominal Power (I_{mp})	7.20A	7.28A	7.35A	7.42A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Polycrystalline PERC 156x156mm (6x6inches)
Number of cells	72 (6x12)
Module dimensions	1956x992x40mm
Weight	22.5kg
Front cover	3.2mm (0.13inches) tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP67, 3 diodes
Cable	4mm ² (0.006inches ²), 1000mm (39.37inches)
Connector	MC4 or MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P_{max}	-0.40%/°C
Temperature Coefficients of V_{OC}	-0.30%/°C
Temperature Coefficients of I_{SC}	0.05%/°C


PACKAGING

Standard packaging	21pcs/pallet
Module quantity per 20' container	210pcs
Module quantity per 40' container	462pcs(GP)/506pcs(HQ)


ENGINEERING DRAWINGS

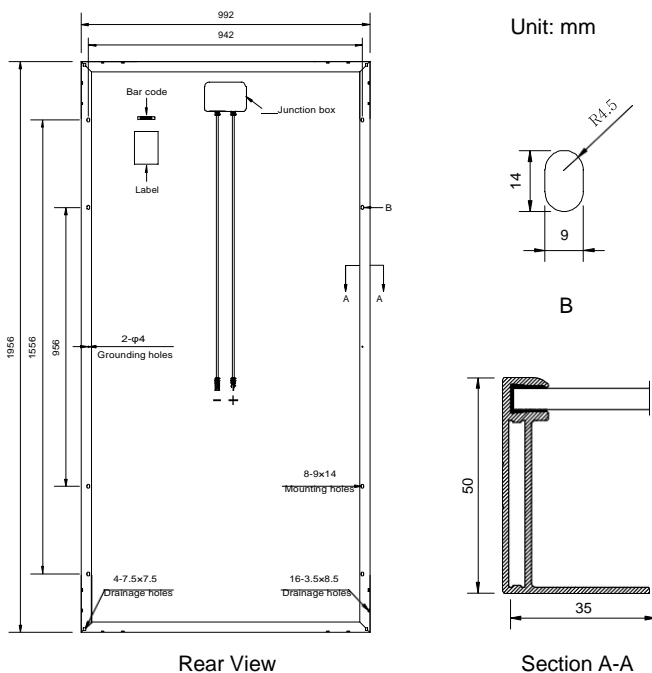

IV CURVES

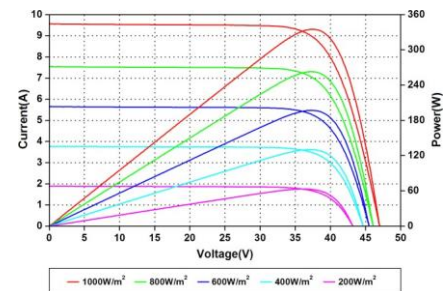

Current-Voltage and Power-Voltage Curves at Different Irradiances

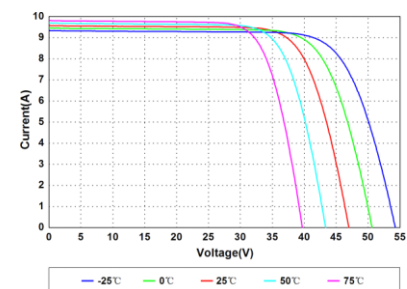

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.

+44 (0)1753 910327 | info@uksol.uk | www.uksol.uk | WhatsApp: +44 (0)7949 489911

UKSOL and the UKSOL logo are registered trademarks of UKSOL Ltd.