

N TYPE MONO CRYSTALLINE BIFACIAL MODULE

340 / 345 / 350 / 355 / 360 / 365 / 370 Watts

Black Panther

Overview

Through the use of N-Type high efficiency mono cells and dual-glass structure, the overall performance of the BiFacial module increases under optimal conditions up to 30% more than an equivalent monofacial module. A fully certified, premium quality and high efficiency module made with A Grade materials.

Key Benefits



Certified by Independent Engineering Bodies



Product Liability Insurance



Engineered in EU




15 Years Limited Product Warranty



Anti-PID Technology



Low Carbon Footprint

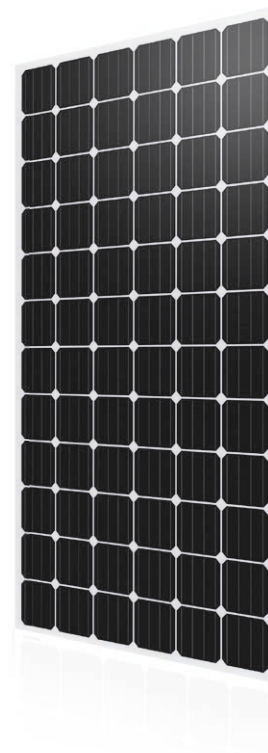

Guaranteed mechanical resistance to severe weather conditions



Guaranteed Positive Tolerance up to 5W




100% electro-luminescence tested

Tests, Certifications and Warranties

Standard Tests	IEC 61215, IEC 61730
Factory Quality Tests	ISO 9001: 2008, ISO 14001: 2004, ISO17025: 2005
Certifications	Fire Rating Type 1, conformity to CE, PV CYCLE
Insurance	Product liability insurance provided by Allianz
Surface Maximum Load Capacity	Above 5400Pa
Positive Tolerance	Guaranteed positive tolerance of up to 5W
Warranties	<ul style="list-style-type: none"> 15-year limited product warranty 15-year manufacturer warranty on 90.3% of the nominal performance 30-year transferable linear power output warranty

Linear Performance Warranty

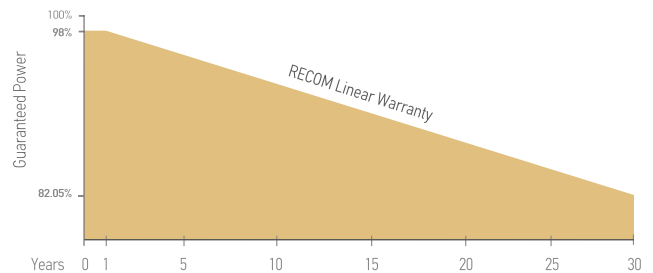

First Year Output $\geq 98\%$ 2-29 Year Decline $\leq 0.55\%$ 30 Year Output $\geq 82.05\%$

N TYPE MONO CRYSTALLINE BIFACIAL MODULE

RCM-xxx-6MA-DG (xxx=340-370)


Electrical Characteristics

Rated Power	340W	345W	350W	355W	360W	365W	370W
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W
Maximum Power Voltage (Vmp)	39.38V	39.67V	39.82V	39.89V	39.96V	40.03V	40.10V
Maximum Power Current (Imp)	8.63A	8.70A	8.79A	8.90A	9.01A	9.12A	9.23A
Open Circuit Voltage (Voc)	46.97V	47.01V	47.06V	47.13V	47.20V	47.27V	47.34V
Short Circuit Current (Isc)	9.24A	9.31A	9.40A	9.52A	9.64A	9.76A	9.88A
Module Efficiency (with frame)	18.86%	19.11%	19.37%	19.62%	19.87%	20.10%	20.35%
Module Efficiency (without frame)	19.09%	19.35%	19.60%	19.86%	20.11%	20.36%	20.57%
Maximum Series Fuse	15A	15A	15A	15A	15A	15A	20A
Maximum System Voltage	1.000 VDC (IEC)						
<i>Tested at Standard Test Conditions. Measurement tolerances: ± 3%</i>							

Mechanical Data

Dimensions (with frame)	1988mm x 1000mm x 40mm
Dimensions (without frame)	1980mm x 992mm x 6mm
Weight (with frame)	30.5 Kg
Weight (without frame)	27.5 Kg
Front / Back Glass	2.5 mm
Output Cables	TUV (2Pfg1169:2007), UL 4703, UL44 4.0 mm ² (0.006 in ²), MC4 type connectors

Dimensions (without frame)

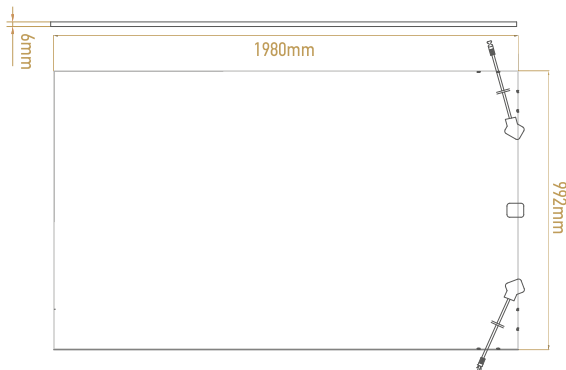


**Release 2019-05, v6.2.

RECOM assumes no liability or responsibility for any typographical error, layout error, misinformation, any other error, omission, contained herein.

I-V Curve

The module relative power loss at low light irradiance of 200W/m² is less than 3%.

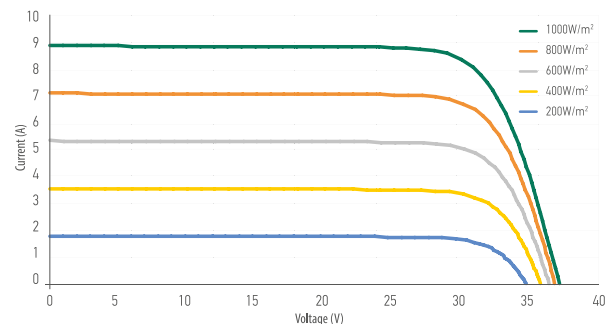

Temperature Characteristics

Pmax Temperature Coefficient	-0.37% / °C
Voc Temperature Coefficient	-0.29% / °C
Isc Temperature Coefficient	+0.04% / °C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C

Packing Configuration

Container	40'HC (with frame)	40'HC (without frame)
Pieces per Pallet	27	33
Pallets per Container	22	22
Pieces per Container	594	726

recom-solar.com

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, RECOM Solar reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein. Please read the safety and installation instructions before using the modules.

© Copyright 2019, RECOM