


Half-Cell High Efficiency PV Module

9BB


158.75^{mm}

HCM72X9
395W-410W

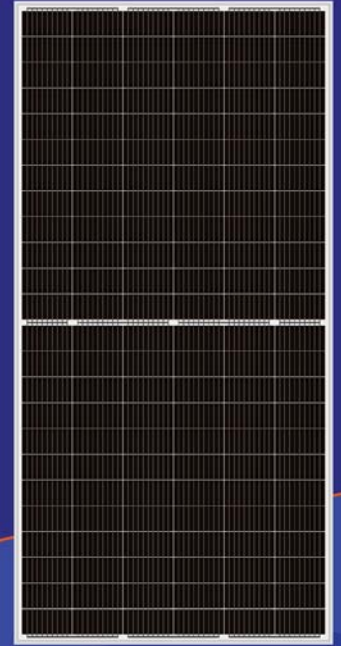

QUALITY GUARANTEE

LINEAR POWER OUTPUT GUARANTEE

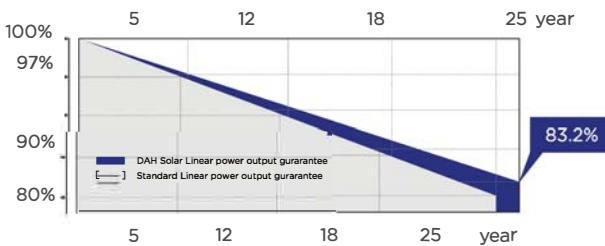

- 10 years** 10-year material & technology Warranty
- 25 years** 25-year linear Power output Warranty

0~+5W
Positive Tolerance

20.36%
Max Module Eff.(%)

PRODUCT PERFORMANCE ADVANTAGE

- Excellent space utilization performance, increasing power density effectively and reducing costs
- Reducing the temperature of the solar module hot spot battery above 20°C , to ensure system stability and reliability
- Larger Size of Light Receiving Area, Higher Solar Panel Power, Lower System Cost
- Lower temperature coefficient, zero depth reflection increasing
- More Busbars, the Less of Broken and cracking , As the Narrowed Cell Bus Bar Width,the Light Receiving Area and Power are Increased too
- Reducing the loss of current mismatch and resistance



Top runner of smart solar system

Factory Address: No.358 Tianhe Road, Luyang Industrial Park, Hefei City, Anhui, China

Office Address: No.1201 Huguang Rd. Hefei City, Anhui, China

Email: info@soliswatt.com

Tel: +86-551-65176633

Half-Cell High Efficiency PV Module

HCM72X9 395W-410W

Design		Mechanical Specification	
		Cells Type	Mono 158.75×79.375mm
		Weight	23kg
		Dimension (L×W×T)	2010×1002×40mm
		Cable	4.0mm ² ; Portrait: N 400mm /P 300mm, Landscape: N 1400mm /P 1400mm
		No.of Cells	144 (6×24)
		Glass	3.2 mm High Transmission, Antireflection Coating
	Junction box	IP68, 3 Bypass Diodes	
	Connector	QC4 or MC4 Compatible	
	Packing	27pcs/pallet, 270pcs/20GP, 638pcs/40HQ	
Operating Parameters			
	Maximum system voltage	1000V/1500V DC	
	Operating Temperature	-40 - +85℃	
	Maximum series fuse rating	20A	
	Snow load, frontside	5400Pa	
	Wind load, backside	2400Pa	
	Nominal operating cell temperature	45℃±2℃	
	Application level	Class A	

Electrical Characteristics(STC)				
Module Type	HCM72X9-395W	HCM72X9-400W	HCM72X9-405W	HCM72X9-410W
Maximum Power (Pmax)	395W	400W	405W	410W
Open-circuit Voltage (Voc)	49.4V	49.6V	49.8V	50.0V
Maximum Power Voltage (Vmp)	41.5V	41.8V	42.1V	42.3V
Short-circuit Current (Isc)	10.12A	10.16A	10.21A	10.25A
Maximum Power Current (Imp)	9.52A	9.57A	9.62A	9.70A
Module Efficiency (%)	19.62%	19.87%	20.11%	20.36%
Power Tolerance	0~+5W			
Temperature Coefficient of Isc	0.05%/℃			
Temperature Coefficient of Voc	-0.29%/℃			
Temperature Coefficient of Pmax	-0.37%/℃			
Standard Test Environment	Irradiance 1000w/m ² , Cell temperature 25℃, Spectrum AM1.5			

Electrical Characteristics(NOCT)				
Module Type	HCM72X9-395W	HCM72X9-400W	HCM72X9-405W	HCM72X9-410W
Maximum Power (Pmax)	298W	302W	305W	309W
Open-circuit Voltage (Voc)	47.1V	47.3V	47.5V	47.7V
Maximum Power Voltage (Vmp)	39.3V	39.6V	39.9V	40.2V
Short-circuit Current (Isc)	8.16A	8.19A	8.23A	8.27A
Maximum Power Current (Imp)	7.57A	7.62A	7.65A	7.69A
Standard Test Environment	Irradiance 800w/m ² , Cell temperature 20℃, Spectrum AM1.5, Wind speed 1m/s			



Top runner of smart solar system

Factory Address: No.358 Tianhe Road, Luyang Industrial Park, Hefei City, Anhui, China

Office Address: No.1201 Huguang Rd. Hefei City, Anhui, China

Email: info@soliswatt.com

Tel: +86-551-65176633