



/ SCS 3450 UP-XT / SCS 3600 UP-XT / SCS 3800 UP-XT / SCS 3950 UP-XT



# Sunny Central Storage UP-XT

Extended grid-feed power

Battery inverter for large-scale storage systems

## Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Higher power density
- Higher power in grid feed direction
- Higher short circuit contribution

## Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

## Flexible

- One device for all applications
- Stand-alone device or turnkey solution with SMA medium-voltage system

## Versatile

- Integrated battery communication
- Customized monitoring and control of inverters
- Grid management functions for dynamic grid support
- Integrated voltage supply for internal consumption and external loads

**With a max. output of up to 4600 kVA and system voltages up to 1500 V DC, the SMA Sunny Central Storage allows for more efficient and flexible system design for battery power plants.**

The SCS UP-XT versions allow a system design with higher output power and higher short-circuit current contribution. The intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature.

# SUNNY CENTRAL STORAGE UP-XT

Technical Data	SCS 3450 UP-XT	SCS 3600 UP-XT
<b>Battery side (DC)</b>		
Operating DC voltage range $V_{DC}$	880 V to 1500 V	921 V to 1500 V
Max. DC current $I_{DC, max}$	4750 A	
Fuse characteristic for battery connection - pre-arcing integral limit single DC busbar / split DC busbar <sup>12) 15)</sup>	10.75 MA <sup>2</sup> s / 8.0 MA <sup>2</sup> s	
Single DC busbar 36 connections per pole / split DC busbar 12/12/12 connections per pole / fused single DC busbar 22 connections per pole <sup>16)</sup>	● / ○ / ○	
DC connection	with terminal lug	
<b>Grid side (AC)</b>		
Nominal AC power at 1200 Vdc and $\cos \varphi = 1.0$ (at 25 °C)	4000 kW	4200 kW
Grid-Feed mode: AC apparent power at 1200 Vdc (at 25 °C / at 40 °C / at 50 °C) <sup>3)13)14)</sup>	4000 kVA / 3640 kVA / 3400 kVA	4200 kVA / 3822 kVA / 3570 kVA
Charging mode: AC apparent power at 1200 Vdc (at 25 °C / at 40 °C / at 50 °C) <sup>3)13)14)</sup>	3589 kVA / 3268 kVA / 3001 kVA	3769 kVA / 3432 kVA / 3152 kVA
Max. AC current $I_{AC, max}$ (at 25 °C / at 40 °C / at 50 °C)	3850 A / 3504 A / 3273 A	
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / AC voltage range <sup>1) 8)</sup>	600 V / 480 V to 720 V	630 V / 504 V to 756 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals <sup>9)</sup>	> 2	
Cos Phi at rated power / displacement Cos Phi adjustable <sup>8) 10)</sup>	1 / 0.0 overexcited to 0.0 underexcited	
AC connection	with busbar system (three busbars, one per line conductor)	
<b>Efficiency</b>		
Max. efficiency <sup>2)</sup>	98.8%	
<b>Protective Devices</b>		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Insulation monitoring	●	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
<b>General Data</b>		
Dimensions (W / H / D)	2815 / 2318 / 1588 mm (110.8 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8200 lb	
Self-consumption (max. <sup>4)</sup> / partial load <sup>5)</sup> / average <sup>6)</sup>	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal (8.4 kVA transformer) / external auxiliary power supply	● / ○	
Noise emission <sup>7)</sup>	65.0 dB(A)	
Operating temperature range (optional) <sup>8)</sup>	(-40 °C) -25 °C to 60 °C / (-40 °F) -13 °F to 140 °F	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL <sup>8)</sup> 1000 m / 2000 m <sup>11)</sup>	● / ○	
Fresh air consumption	6500 m <sup>3</sup> /h	
<b>Features</b>		
Grid forming / black start ready	○ / ○	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1/-2, AR-N 4110 / 4120, Arrêté du 23/04/08	
EMC standards	IEC 61000-6-2, EN 55011, CISPR11, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
Type designation	SCS 3450 UP-XT	SCS 3600 UP-XT

● Standard features ○ Optional – Not available

Technical Data	SCS 3800 UP-XT	SCS 3950 UP-XT
<b>Battery side (DC)</b>		
Operating DC voltage range $V_{DC}$	962 V to 1500 V	1003 V to 1500 V
Max. DC current $I_{DC, max}$	4750 A	
Fuse characteristic for battery connection - pre-arcing integral limit single DC busbar / split DC busbar <sup>12) 15)</sup>	10.75 MA <sup>2</sup> s / 8.0 MA <sup>2</sup> s	
Single DC busbar 36 connections per pole / split DC busbar 12/12/12 connections per pole / fused single DC busbar 22 connections per pole <sup>16)</sup>	● / ○ / ○	
DC connection	with terminal lug	
<b>Grid side (AC)</b>		
Nominal AC power at 1200 Vdc and $\cos \varphi = 1.0$ (at 25 °C) <sup>14)</sup>	4400 kW	4600 kW
Grid-Feed mode: AC apparent power at 1200 Vdc (at 25 °C / at 40 °C / at 50 °C) <sup>3)13)14)</sup>	4400 kVA / 4004 kVA / 3740 kVA	4600 kVA / 4186 kVA / 3910 kVA
Charging mode: AC apparent power at 1200 Vdc (at 25 °C / at 40 °C / at 50 °C) <sup>3)13)14)</sup>	3949 kVA / 3596 kVA / 3302 kVA	4129 kVA / 3759 kVA / 3453 kVA
Max. AC current $I_{AC, max}$ (at 25 °C / at 40 °C / at 50 °C)	3850 A / 3504 A / 3273 A	
Max. total harmonic distortion	< 3% at nominal power	
Nominal AC voltage / AC voltage range <sup>1) 8)</sup>	660 V / 528 V to 759 V      690 V / 552 V to 759 V	
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz	
Min. short-circuit ratio at the AC terminals <sup>9)</sup>	> 2	
Cos Phi at rated power / displacement Cos Phi adjustable <sup>8) 10)</sup>	1 / 0.0 overexcited to 0.0 underexcited	
AC connection	with busbar system (three busbars, one per line conductor)	
<b>Efficiency</b>		
Max. efficiency <sup>2)</sup>	98.8%	
<b>Protective Devices</b>		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I	
AC overvoltage protection (optional)	Surge arrester, class I	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Insulation monitoring	●	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
<b>General Data</b>		
Dimensions (W / H / D)	2815 / 2318 / 1588 mm (110.8 / 91.3 / 62.5 inch)	
Weight	< 3700 kg / < 8200 lb	
Self-consumption (max. <sup>4)</sup> / partial load <sup>5)</sup> / average <sup>6)</sup>	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal (8.4 kVA transformer) / external auxiliary power supply	● / ○	
Noise emission <sup>7)</sup>	65.0 dB(A)	
Operating temperature range (optional) <sup>8)</sup>	(-40 °C) -25 °C to 60 °C / (-40 °F) -13 °F to 140 °F	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL <sup>8)</sup> 1000 m / 2000 m <sup>11)</sup>	● / ○	
Fresh air consumption	6500 m <sup>3</sup> /h	
<b>Features</b>		
Grid forming / black start ready	○ / ○	
Communication	Ethernet, Modbus Master, Modbus Slave	
Communication with SMA string monitor (transmission medium)	Modbus TCP / Ethernet (FO MM, Cat-5)	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply transformer for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1/-2, AR-N 4110 / 4120, Arrêté du 23/04/08	
EMC standards	IEC 61000-6-2, EN 55011, CISPR11, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
Type designation	SCS 3800 UP-XT	SCS 3950 UP-XT

● Standard features ○ Optional – Not available

1) Below nominal AC voltage, AC power decreases in the same proportion

2) Efficiency measured without internal power supply

3) AC apparent power at higher dc voltages on request

4) Self-consumption at rated operation

5) Self-consumption at < 75% Pn at 25 °C

6) Self-consumption averaged out from 5% to 100% Pn at 25 °C

7) Sound pressure level at a distance of 10 m

8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets

9) A short-circuit ratio of < 2 requires a special approval from SMA

10) Max. power values (S/P/Q) can be requested based on project specific design

11) Earlier temperature-dependent de-rating and reduction of DC open-circuit voltage

12) Battery short circuit disconnection has to be done on the battery side with ultra rapid battery string or group fuses, e.g. fuse type aR/aBat & DC time constant Tau (L/R) ≤ 1ms

13) The specified services can be provided on a long-term basis. Depending on the ambient temperature and the inverter temperature, the maximum temperature-dependent AC power can also occur on short notice


14) Depending on the ratio of reactive power (cos φ), an extended power derating may occur.

15) Please check the manual for further information

16) fused DC input equipped with optional 750 A, 900 A or 1250 A fuses

## SYSTEM DIAGRAM

- DC
  - AC
  - Modbus TCP
  - SMA scope
  - Customer scope
- \*with own BMS

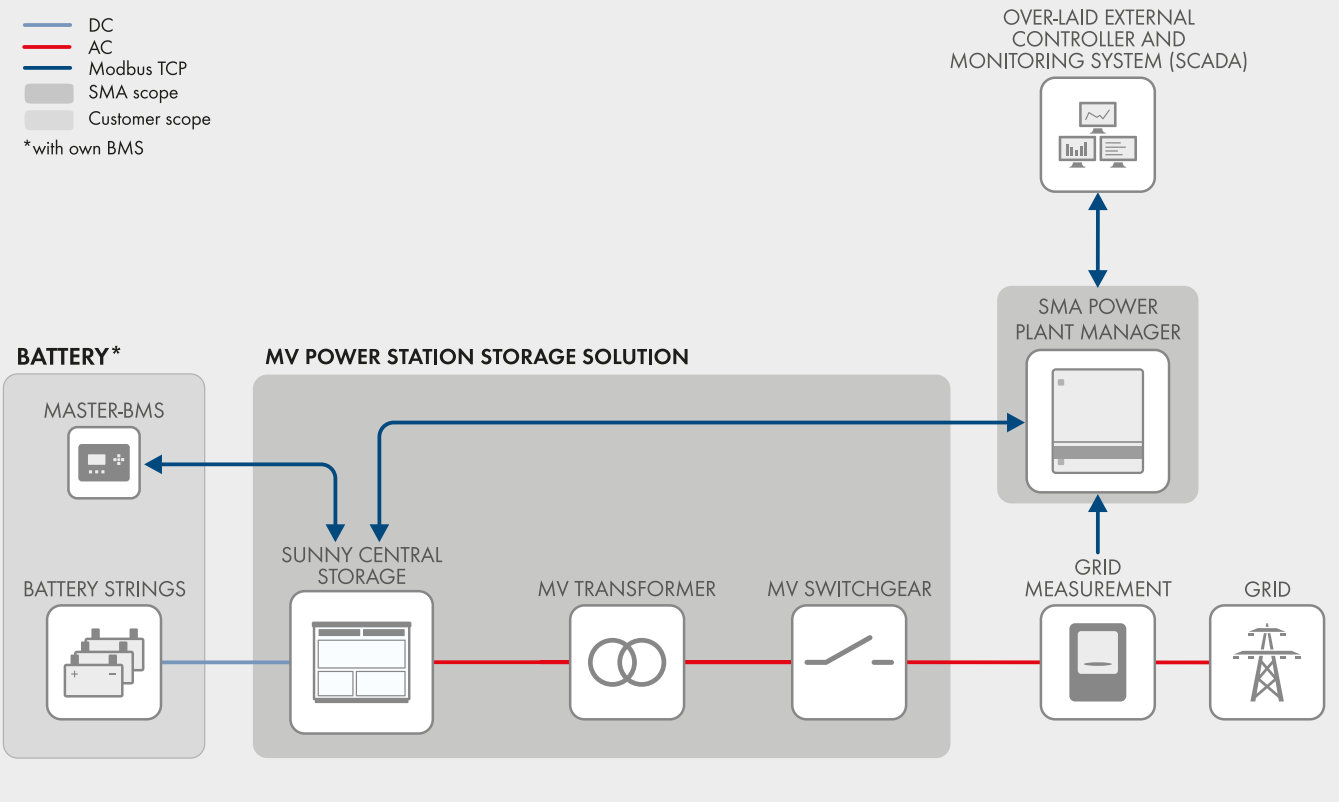

### Grid-connected functions

- Setpoints for active and reactive power
- Static grid support Q(U), P(f)
- Dynamic grid support (FRT)
- Active islanding detection (AID)
- High compatibility with different battery types

### Compatible with energy management system functionalities

- External static grid supporting functions
- Ramp-rate control of PV power
- Peak shaving
- Energy shifting
- Genset optimization control
- Reducing necessary spinning reserve of gensets
- Battery start-up and stop sequence
- Operates the battery within optimal operation window
- Grid Forming
- Black Start