



AESOLAR

since 2003

mete^r

More power, less degradation

30
years

Performance
Guarantee

15
years

Product
Guarantee

680W-700W

AE CME-132 Series

N-TYPE TOPCON TECHNOLOGY PV MODULES
HALF-CUT CELLS • MONO-FACIAL

www.ae-solar.com

Ver. 23.11.1

132

HALF
CELLS

210
mm

CELL
SIZE




LID
RESISTANT



HIGHLY STABLE
AND TOUGH



IEC 61215
IEC 61730
Regular Production Surveillance
Type Tested and Monitored




AE CME-132 Series 680W-700W



N-TYPE TOPCON TECHNOLOGY PV MODULES
HALF-CUT CELLS • MONO-FACIAL

Mechanical and design specification

Cell type	N-type TOPCon Technology, Half-cut cells, 210mm
No. of cells	132
Front cover	3.2mm glass, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	White Backsheet
Junction box	IP68 rated, 3 Bypass Diodes
Frame	30 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	2383 mm x 1302 mm x 30 mm
Weight	31.5 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400Pa / 244kg/m ²
Snow load	5400Pa / 550kg/m ²


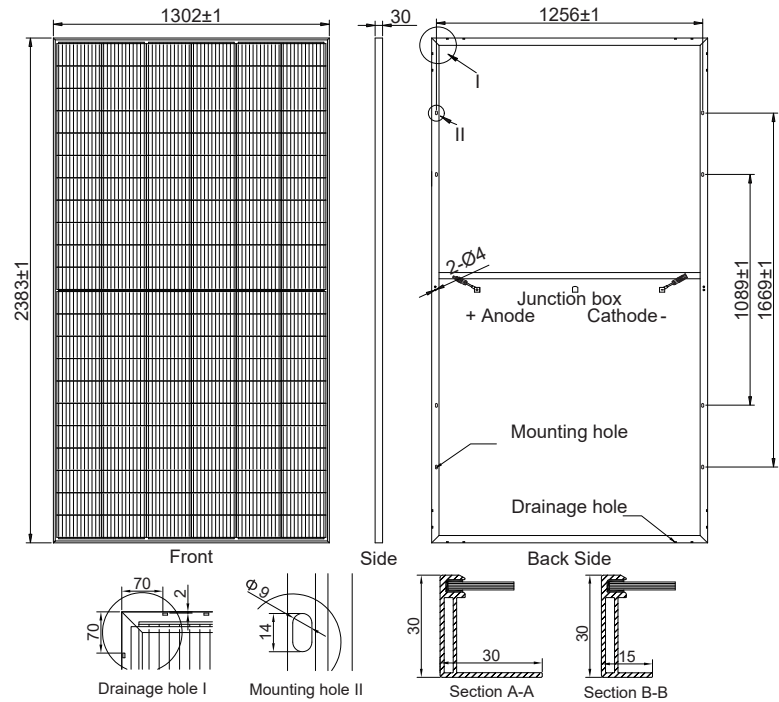


Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	612 pcs / 40 HQ
Size / Pallet	1350 mm x 1140 mm x 2500 mm (Upright)
Weight	1167 kg / pallet

Temperature ratings

Operating temperature (°C)	-40 to +85
Temp.coefficient of P _{max} (%/°C)	-0.3
Temp.coefficient of V _{oc} (%/°C)	-0.24
Temp.coefficient of I _{sc} (%/°C)	0.04
Nom. operating temp. NOCT (°C)	43 ± 2

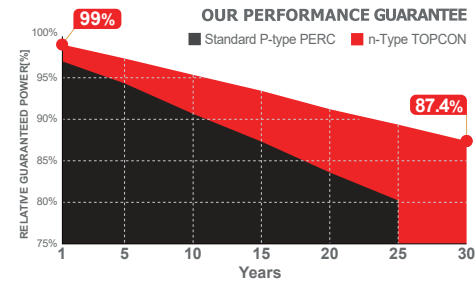

Electrical specifications (STC*):	AE680CME-132	AE685CME-132	AE690CME-132	AE695CME-132	AE700CME-132	
Nominal Max. Power	P _{max} (Wp)	680	685	690	695	700
Maximum operating voltage	V _{MPP} (V)	39.65	39.85	40.10	40.30	40.52
Maximum operating current	I _{MPP} (A)	17.16	17.19	17.23	17.25	17.28
Open-circuit voltage	V _{oc} (V)	47.40	47.70	47.90	48.10	48.30
Short-circuit current	I _{sc} (A)	18.18	18.21	18.25	18.28	18.31
Module efficiency	η (%)	21.92	22.08	22.24	22.41	22.57
Power tolerance	(W)	0~+5				
Maximum system Voltage	(V)	1500				
Maximum series fuse rating	(A)	30				

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*):	AE680CME-132	AE685CME-132	AE690CME-132	AE695CME-132	AE700CME-132	
Nominal Max. Power	P _{max} (Wp)	517	521	525	529	533
Maximum operating voltage	V _{MPP} (V)	37.20	37.30	37.60	37.85	38.10
Maximum operating current	I _{MPP} (A)	13.91	13.94	13.97	13.98	14.00
Open-circuit voltage	V _{oc} (V)	44.90	45.20	45.40	45.60	45.80
Short-circuit current	I _{sc} (A)	14.65	14.67	14.71	14.75	14.79

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.