

60
Series **HALF-CELL
MODULE**

585 - 605w

PeX Series: SNX-E60HP

21.37%

Maximum Efficiency

0-+5w

Positive Power Tolerance

20years

Product Warranty



HIGHER VALUE


- ✘ Longer Warranty terms and lower power degradation
- ✘ Lower LCOE for shorter payback period

HIGHER PERFORMANCE

- ✘ Module Power reaches up to 605W by multi-busbar cell design
- ✘ Lower resistance performance by half-cell structure
- ✘ Lower LID by lower string current

MORE RELIABLE

- ✘ Excellent anti-PID performance
- ✘ Lower hot spot risks
- ✘ Lower Pmax temperature coefficient
- ✘ Mechanical loading 5400Pa snow load and 2400Pa wind load

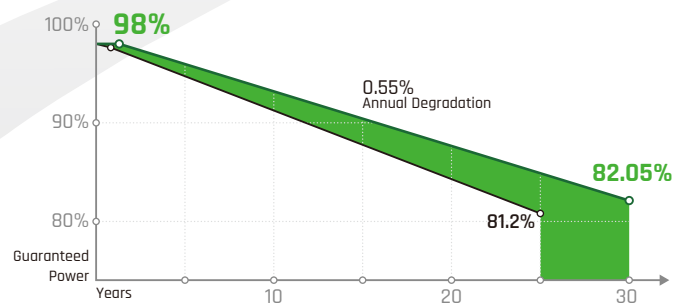

Sonnex Half-Cell Module Performance Warranty

Warranty

20 years product workmanship warranty, 30 years linear power output warranty. The power degradation for the first year will be less than 2%. From the 2nd year and onwards, the annual degradation will be less than 0.55%. Guaranteed performance ratio of 82.05% after 30 years.

Sonnex Energie GmbH

Add: Gebäude 571, Cargo City Süd, 60549 Frankfurt am Main, Germany
www.sonnexenergie.com info@sonnexenergie.de

585 - 605W HALF-CELL MODULE 60 Series

SNX-E60HP

Electrical Characteristics at Standard Test Conditions(STC)

Module Type: SNX-E60HP-***M	585	590	595	600	605
Maximum Power-Pm [W]	585	590	595	600	605
Open Circuit Voltage-Voc [V]	41.1	41.3	41.5	41.7	41.9
Short Circuit Current-Isc [A]	18.22	18.27	18.31	18.35	18.39
Maximum Power Voltage-Vm [V]	31.1	34.3	34.5	34.7	34.9
Maximum Power Current-Im [A]	17.16	17.21	17.25	17.30	17.34
Module Efficiency-η [%]	20.7	20.8	21.0	21.2	21.4

Electrical Characteristics at NMOT


Maximum Power-Pm [W]	443	447	451	454	458
Open Circuit Voltage-Voc [V]	38.5	38.7	38.9	39.1	39.3
Short Circuit Current-Isc [A]	14.81	14.85	14.88	14.92	14.96
Maximum Power Voltage-Vm [V]	31.5	31.7	31.9	32.0	32.2
Maximum Power Current-Im [A]	14.05	14.09	14.13	14.18	14.22

Note: 1. Standard Test Conditions [STC]: Irradiance 1000 W/m²; AM 1.5; Ambient temperature 25°C ;
 2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m²; wind speed 1m/s; ambient temperature 20°C.
 3. Tolerance of Pm: 0-+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

Mechanical Characteristics

Dimensions	2172 × 1303 × 35 mm
Weight	31kg
Front Glass	AR coating tempered glass, 3.2mm
Frame	Anodized aluminum alloy
Cells	Mono-crystalline solar cell 210mm*105mm
Cell Orientation	120 (6×20)
Junction Box	IP68
Cable/Connectors	4mm ² / MC4 or EV02

Drawing

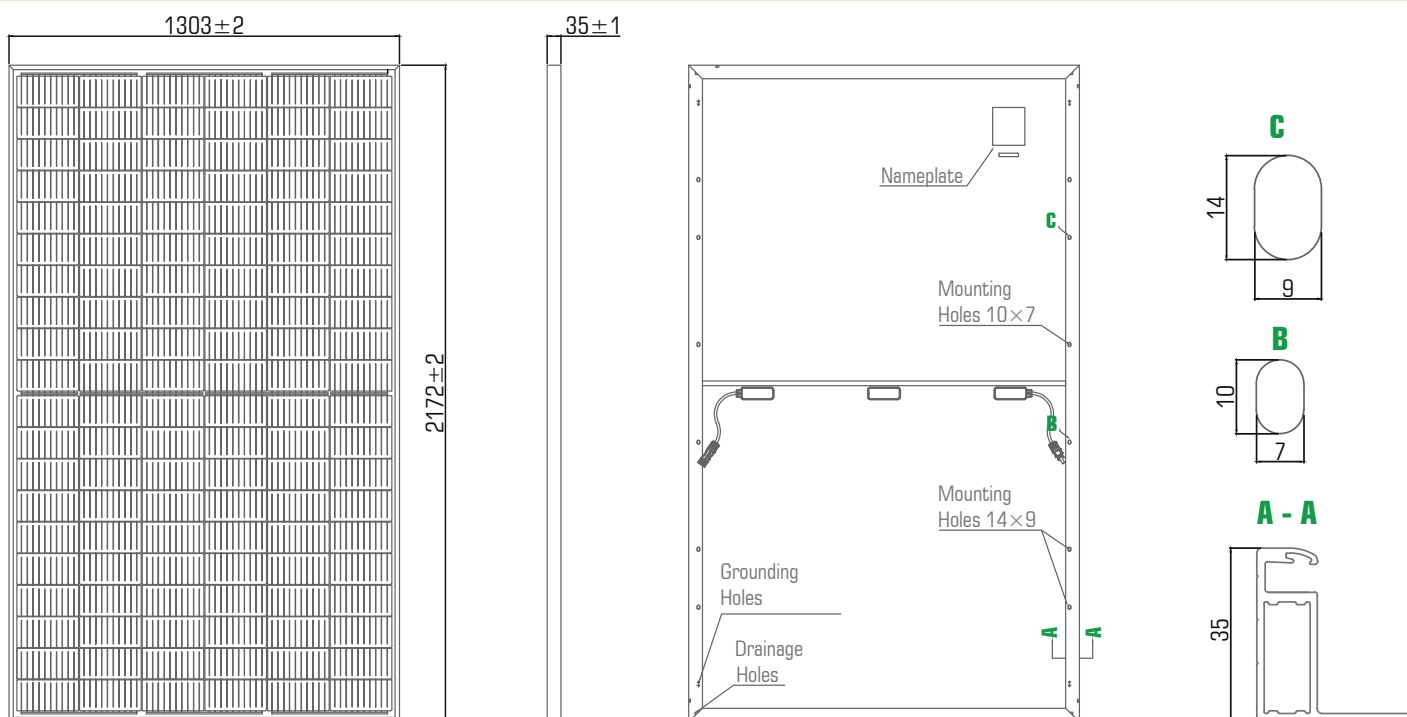

Temperature Characteristics

NMOT	45 °C (±2°C)
Temperature Coefficient of Voc	-0.289% /°C
Temperature Coefficient of Isc	+0.05% /°C
Temperature Coefficient of Pm	-0.380% /°C


Maximum Ratings

Maximum System Voltage [V]	DC 1500(IEC)
Series Fuse Rating [A]	30
Maximum Surface Load Capacity [Pa]	5,400
Operating Temperature [°C]	- 45 to + 85
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m·s ⁻¹

Other Characteristics

Packaging 31 pcs/pallet; 558 pcs/40' HQ container

I-V curve

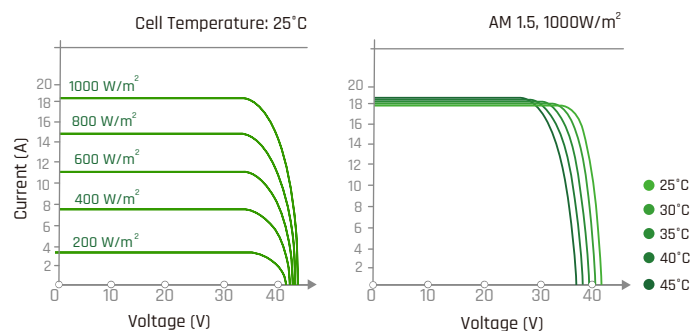

Declaration: Along with the technical improvement and product update, deviation between the technical parameter and Sonnex future products might occur. Specifications included in this datasheet are subject to change without prior notice. Sonnex reserves the right of final interpretation.