




SpolarPV
Easy Invest, More Returns

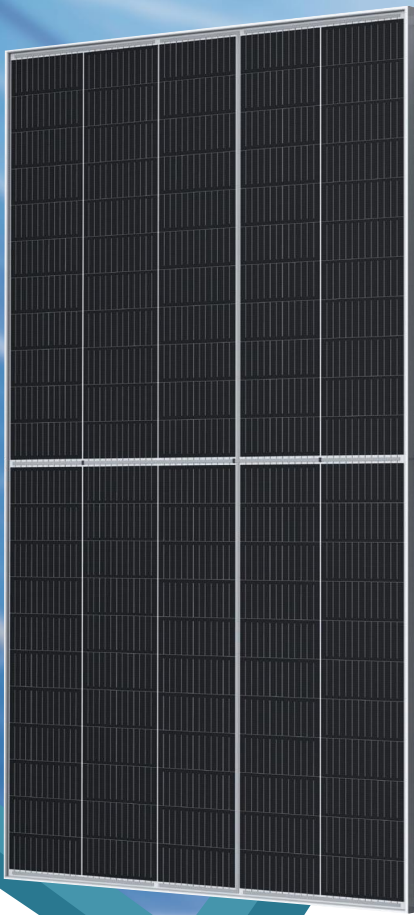

21.46 %

Module efficiency

560 W

Highest power output



Product warranty



Linear power warranty

SPV560-PG12-110

540-560Watt



High Efficiency

Higher power conversion efficiency benefited from advanced Passivated Emitter and Rear Cell (PERC) technology.



Anti-reflection

Less than 20% reflectivity with minimum glare.



Low-light Performance

Certified to withstand: wind load (2400 Pa), snow load (5400 Pa) and hail strike.




Severe Weather Resilience

Advanced glass and cell surface texture designs ensure excellent performance in low environment.



Durability against extreme environmental conditions

High salt mist resistance certified by IEC 61701, suitable for coastal areas.

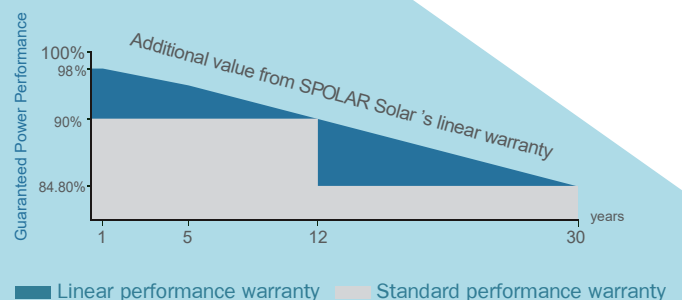

ISO9001:2016 ISO14001:2016
OHSAS18001:2011 certified factory.
IEC61215 IEC61730 certified products.


Electrical Characteristics at Standard Test Conditions (STC)

Module Type	SPV540-PG12-110	SPV545-PG12-110	SPV550-PG12-110	SPV555-PG12-110	SPV560-PG12-110
Maximum Power - Pmax (W)	540	545	550	555	560
Maximum Power Voltage - Vmp (V)	31.21	31.39	31.59	31.80	32.00
Maximum Power Current - Imp (A)	17.32	17.38	17.41	17.45	17.50
Open-circuit Voltage - Voc (V)	37.50	37.70	37.80	37.90	38.32
Short-circuit Current - Isc (A)	18.41	18.47	18.52	18.56	18.62
Module Efficiency STC (%)	20.69 %	20.89 %	21.08 %	21.26 %	21.46 %


Electrical Characteristics at Normal Operating Cell Temperature (NOCT)

Module Type	SPV540-PG12-110	SPV545-PG12-110	SPV550-PG12-110	SPV555-PG12-110	SPV560-PG12-110
Maximum Power - Pmax (W)	409	413	417	421	425
Maximum Power Voltage - Vmp (V)	29.02	29.19	29.28	29.50	29.68
Maximum Power Current - Imp (A)	14.08	14.16	14.21	14.27	14.32
Open-circuit Voltage - Voc (V)	35.32	35.50	35.69	35.84	35.97
Short-circuit Current - Isc (A)	14.83	14.89	14.93	15.02	15.09
Power Tolerance	0 ~ +3W		Operating Temperature (°C)		-40 °C ~ +85 °C
Temperature Coefficients of Pmax	-0.35% / °C		Maximum System Voltage		1500 V
Temperature Coefficients of Voc	-0.275% / °C		Maximum Series Fuse Rating		30 A
Temperature Coefficients of Isc	0.045% / °C		Nominal Operating Cell Temperature		45 ± 2 °C

Current-Voltage Curve under different irradiance




Current-Voltage Curve under different working temperatures



Mechanical Characteristics

Cell Type	Mono-crystalline PERC 210x105 mm
No. of Cells	110 (5x22)
Dimensions	2383x1095x30 mm
Weight	28.0 kg
Glass	3.2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, MC4 Compatible, 3 Bypass Diode
Output Cables	1x4.0 mm ² , Length: 300 mm or Customized Length
Packaging Configuration	31pcs/pallet, 620pcs/40'HQContainer

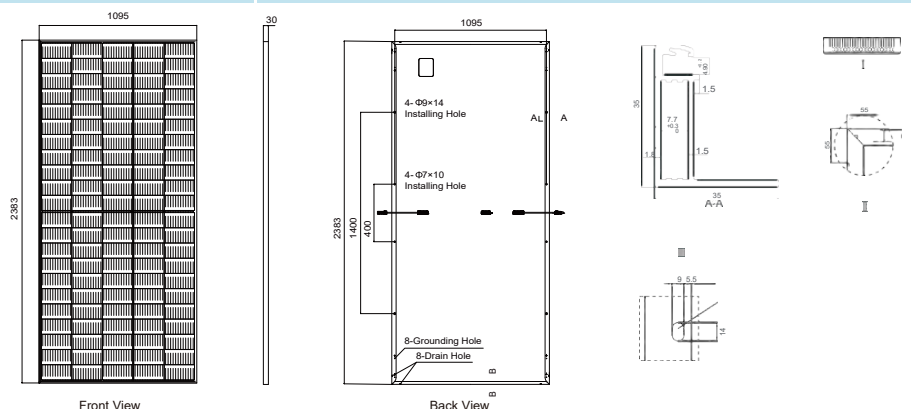

www.spolarpv.com