

Datasheet

210Wp — 215Wp



Monocrystalline solar PV module

Model Number	SN-M210	SN-M215
Maximum Power (pmax)	210Wp	215Wp
Optimum Operating Voltage/Vmp	27V	27V
Optimum Operating Current/Imp	7.78A	7.96A
Open Circuit Voltage /Voc	32.4V	32.4V
Short Circuit Current /Isc	8.38A	8.56A
Module Efficiency	16.1%	16.5%
Power Tolerance (%)	±3	
Maximum Series Fuse Rating	15A	
Maximum system voltage	1000 V DC	


Maximum Data

Operating Temperature	-40°C~+80°C	°C
Storage temperature	from -40°C ~+80°C	°C
Instulation cut voltage	1000	DC
Maximum wind resistance	60m/s	N/m ² or max Km/h
Surface maximum load capacity	200	Kg/m ²
Maximum hail load capacity	25mm	80km/h


EFFICIENCY

-  Low voltage-temperature coefficient allows higher power output at high-temperature condition
-  High efficient, high reliable solar cells ensure our product output stability

Physical Characteristics

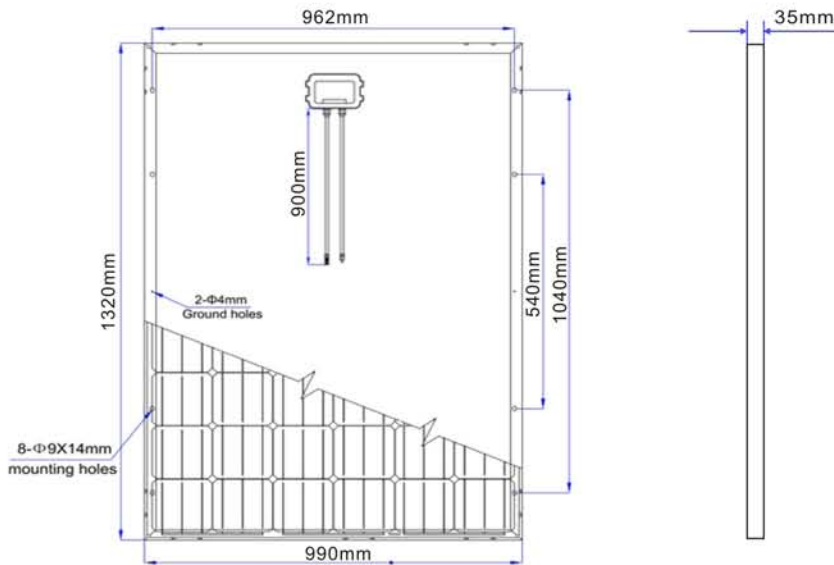

I-V Curve

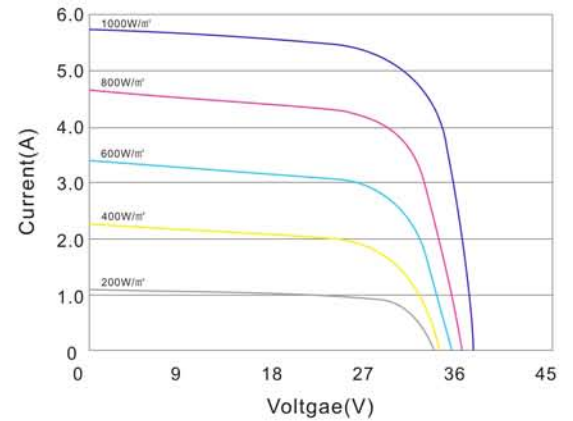

Laminating Data

Cell dimension (mm)	156 x 156
Dimensions (mm)	1320x990x35
Number of cells	48(8*6)
Weight	17Kg
Frame Material	Clear anodized aluminium frame
Thickness of glass	3.2 mm tempered glass
Frame	Anodized aluminum alloy
Laminating material	EVA
Backsheet material	TPT
Junction Box	Ip65


STC

AM condition	AM1.5
Intensity of illumination	1000W/m ²
temperature	25°C

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45%/°C
Temperature Coefficient of Voc	-0.34%/°C
Temperature Coefficient of Isc	0.050%/°C

Superior Warranty

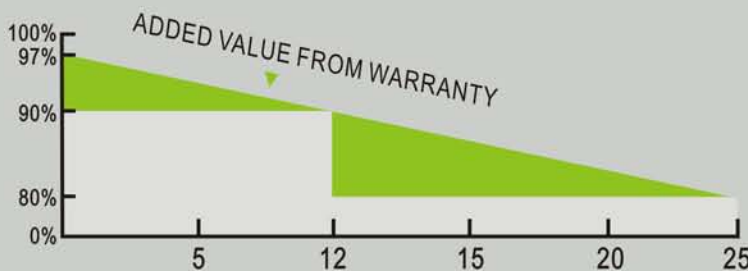

- 10** 10-years Manufacturing warranty.
- 12** 12-years warranty 90% power output.
- 25** 25-years warranty 80% power output.