


BSEM6-72/340-360W MONO CRYSTALLINE MODULE

FEATURES

- **Positive tolerance guarantee reliable power output**
0 ~ + 5W
- **Maximum efficiency**
Higher conversion efficiency (18.5%) benefit from high-level process technology.
- **4 Busbar Solar Cell**
Improved module efficiency, less "Cell to Module" internal power loss.
- **Excellent generation performance in low irradiance**
Outstanding power output performance in irradiance condition: dawn, dusk and rainy days etc.
- **High PID resistance**
Advanced anti-PID technologies, module encapsulation and packaging technologies, this product is suitable for high temperature and high humidity area.
- **Excellent weather resistance**
With salt spray resistance and ammonia resistance, it can be installed in bad environment like seaside, farm etc.
- **Super load capacity**
Module certified to withstand high wind load 2400Pa and snow load 5400Pa.

COMPREHENSIVE PRODUCTS AND SYSTEM CERTIFICATES

IEC61215, IEC61730, CE, CQC, TUV
 ISO9001: Quality Management System
 ISO14001: Environmental Management System
 OHSAS18001: Occupation Health and Safety Management System

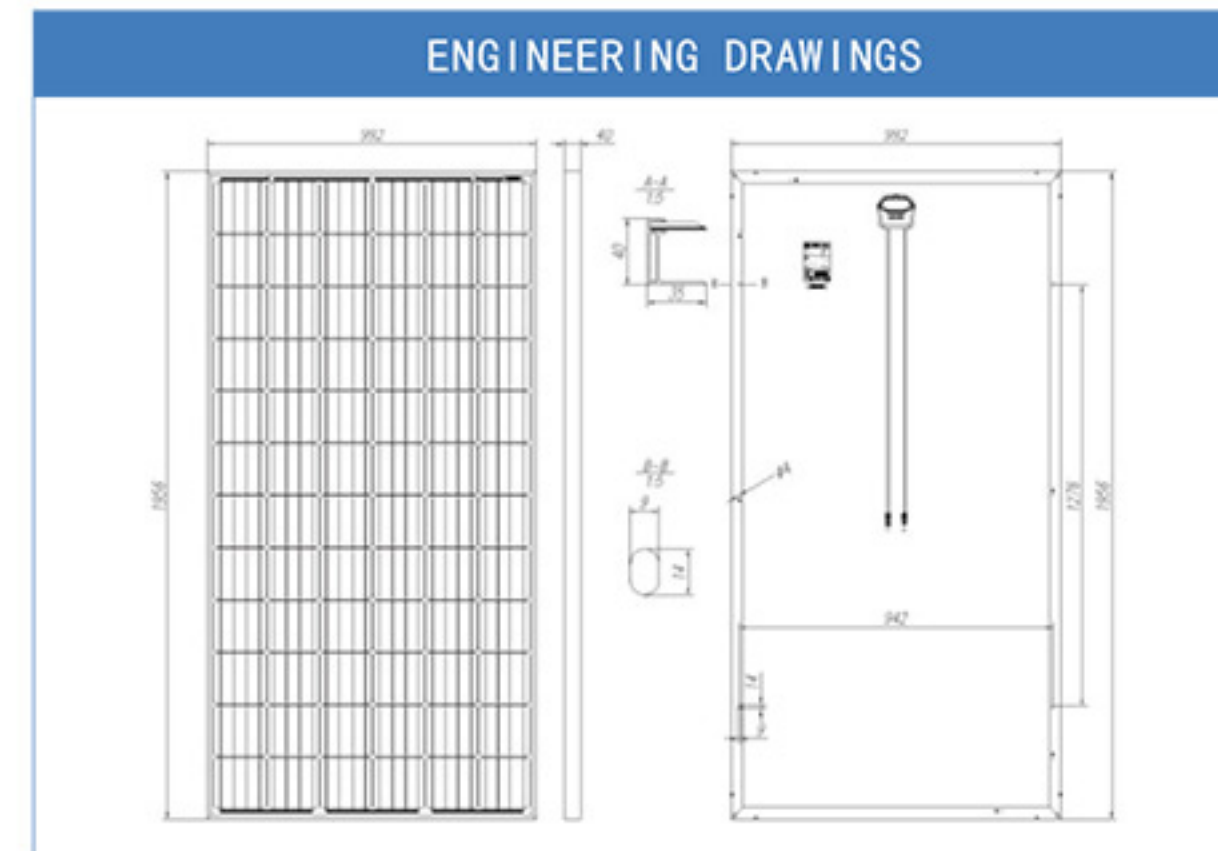

MECHANICAL DATA	
Solar Cells	156x156mm (Mono-crystalline)
No. of Cells	72pcs (6x12)
Dimensions	1956x992x40mm
Glass	3.2mm High transmission solar glass
Frame	Anodized aluminium alloy
Weight	21.0Kg
Junction Box	IP 67 rated
Cables	1 x 4.0mm ² , 1000mm length
Connectors	MC4

PRODUCTS	ELECTRICAL DATA									
	BSEM6-72-340		BSEM6-72-345		BSEM6-72-350		BSEM6-72-355		BSEM6-72-360	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	340W	245.7W	345W	249.4W	350W	253.0W	355W	256.6W	360W	260.2W
Open Circuit Voltage (Voc)	45.7V	42.3V	45.7V	42.3V	45.8V	42.4V	45.8V	42.4V	45.9V	42.5V
Short Circuit Current (Isc)	9.58A	7.75A	9.70A	7.85A	9.82A	7.95A	9.94A	8.04A	10.1A	8.14A
Maximum Power Voltage (Vmp)	37.3V	34.0V	37.4V	34.1V	37.4V	34.1V	37.5V	34.2V	37.5V	34.2V
Maximum Power Current (Imp)	9.13A	7.23A	9.24A	7.31A	9.35A	7.42A	9.47A	7.51A	9.60A	7.61A
Operational Temperature	-40°C~+85°C									
Maximum System Voltage	1000VDC									
Max Series Fuse Rating	15A									
Temperature Coefficient of P _{MAX}	-0.41%/°C									
Temperature Coefficient of V _{OC}	-0.33%/°C									
Temperature Coefficient of I _{SC}	0.059%/°C									
NOCT (Nominal Operating Cell Temperature)	47 ± 2°C									
STC: Irradiance 1000W/m ² , Cell Temperature 25° C, Air Mass AM1.5.										
NOCT: Air Mass AM1.5, Irradiance at 800W/m ² , Ambient Temperature 20°C, Wind Speed 1m/s										

PACKAGING CONFIGURATION	
Pieces per pallet	27pcs
carton dimension (length/width / height)	1976x1130x1140mm
Weight per pallet	620kg

CAUTION: INSTALLING AND OPERATING SOLAR PANELS REQUIRES SPECIALIZED SKILLED, ONLY QUALIFIED PROFESSIONALS CAN DO. READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.