


Haitai TaiJi (166)

HTM440~460MH3-72

Monofacial high efficiency mono PV module

21.16%

Module Efficiency 21.16%

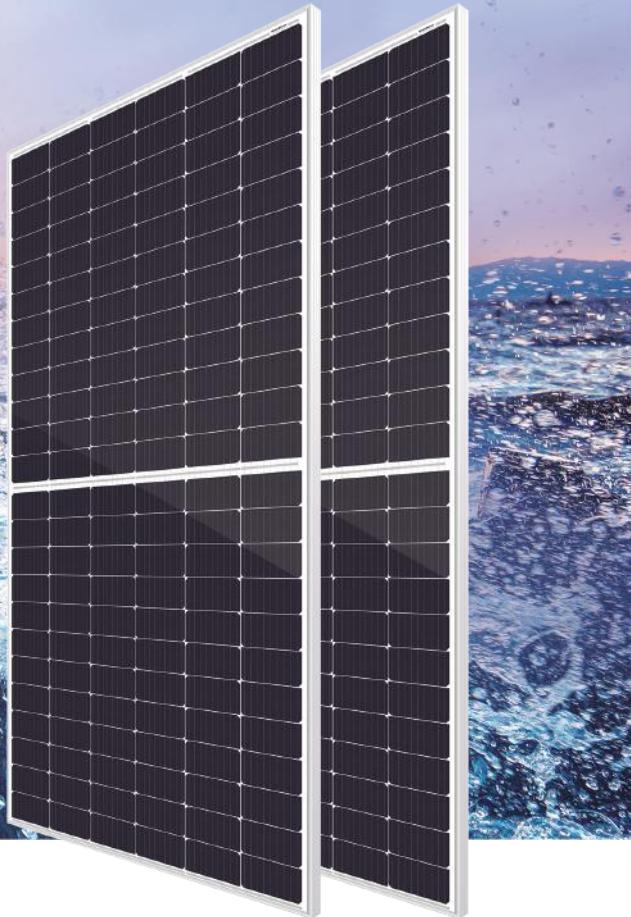

PRODUCT FEATURES

High Efficiency

The multi-busbar half-cut technology can boost energy density to deliver higher output.

High Reliability

Certified in TUV salt spray, ammonia corrosion, 2400Pa wind load and 5400Pa snow load testing. Highly reliable.

High ROI

Effectively reducing BOS costs to achieve lower LCOE and enhanced project profitability.

Low Degradation

First-year degradation is less than 2.0%, with linear degradation of 0.55% per year for 25 years.


Low Risk of Hot Spot

The next-generation cell technology and optimized circuit design adopted can support improved temperature coefficient and better hotspot resistance.

Low Risk of Micro-Crack

The multi-busbar technology contributes to more effective prevention of Micro crack and broken busbars.

LINEAR PERFORMANCE WARRANTY

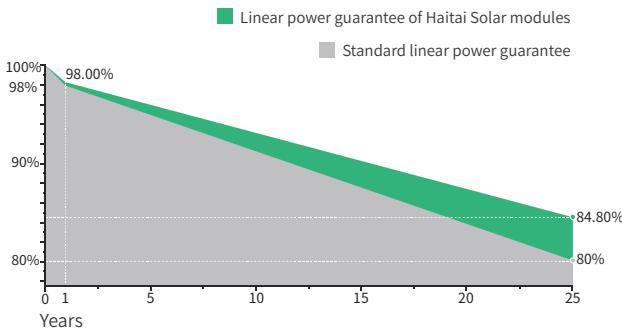

12 YEARS
product warranty

25 YEARS
linear power warranty

0.55 %
Linear attenuation of 0.55% per year within 25 years

CERTIFICATES


- IEC 61215, IEC 61730
- ISO 9001: 2005 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational health and safety management systems



Electrical Data (STC)

Maximum Power (Pmax/W)	440	445	450	455	460
Open Circuit Voltage (Voc/V)	49.08	49.28	49.48	49.68	49.88
Short Circuit Current (Isc/A)	11.39	11.46	11.53	11.59	11.67
Voltage at Maximum Power (Vmp/V)	40.54	40.74	40.94	41.14	41.34
Current at Maximum Power (Imp/A)	10.86	10.93	11.00	11.07	11.13
Module Efficiency (%)	20.24	20.47	20.7	20.93	21.16
Operating Temperature	-40° C~+85° C				
Maximum System Voltage	1000/1500V				
STC (Standard Testing Conditions): Irradiance 1000W/m ² , Cell Temperature 25°C , AM1.5					

Module Dimensions (mm)

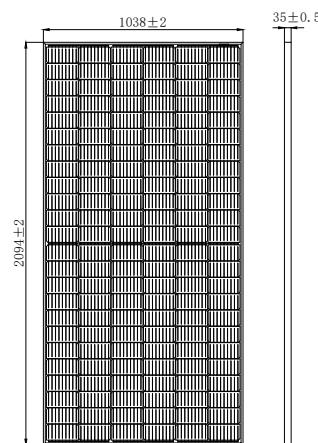

Electrical Data (NMOT)

Maximum Power (Pmax/W)	328	332	336	340	344
Open Circuit Voltage (Voc/V)	45.01	45.21	45.41	45.61	45.81
Short Circuit Current (Isc/A)	9.46	9.54	9.61	9.67	9.74
Voltage at Maximum Power (Vmp/V)	37.34	37.54	37.74	37.94	38.14
Current at Maximum Power (Imp/A)	8.79	8.85	8.91	8.97	9.02

NMOT (Nominal Moudule Operating Temperature): Irradiance 800W/m², Ambient Temperature 20°C , AM1.5, Wind Speed 1m/s.

Mechanical Data

Cell Type	166×83mm Mono
Cell Orientation	144(6×24)
Module Dimensions	2094×1038×35mm
Weight	23.5kg
Glass	3.2mm high transmittance, reinforced glass
Backsheet	Anti-aging film
Frame Material	Anodized aluminum alloy
Junction Box	Protection class IP68
Cable	4.0 mm ² positive pole: 200mm negative pole: 250 mm wire length can be customized
Connector	MC4 compatible connector

Temperature Coefficients

Temperature Coefficient (Pm)	-0.340%/°C
Temperature Coefficient (Voc)	-0.270%/°C
Temperature Coefficient (Isc)	0.048%/°C
NMOT (Nominal Moudule Operating Temperature)	41±3°C


Packaging

Transportation methods	Number of modules per cabinet	Number of modules per pallet
40HQ container	682pcs	31pcs +31pcs



Web: www.haitai-solar.com
E-mail: ht@htsolargroup.com

Data contained in these specifications is subject to change without notice.
Haitai Solar reserves the right to final interpretation of content.
HAITAI20220429EN

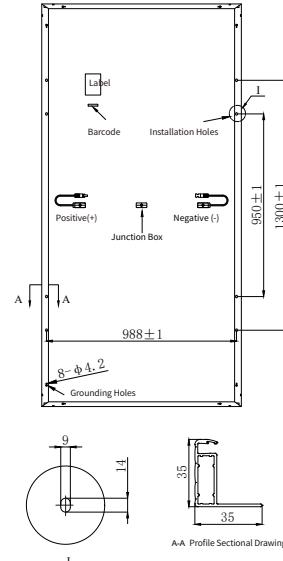

I-V Curve

