

Serie OPzV OPzV Series

La serie de baterías (acumuladores) (Gel tubular 2V (Solar) de Gel de Reko) ha sido diseñada para obtener una mayor vida útil, sin interrupciones.

The RKV series adopts an Immobilized and Tubular Positive Plate technology, which offers high reliability and stable performance. By using die-casted positive grid and patented active material, the battery life exceeds the DIN standard values and has a 20+ years design life in float service. It is very suitable for cyclic use under extreme operating conditions.



Model	Voltage (V)	Capacity (Ah) 20Hr	Dimensions				Terminal	Weight (kg)
			Length (mm)	Width (mm)	Height (mm)	Total Height (mm)		
RKV2-150	2	150	103	206	354	390	F10	14,7
RKV2-200	2	200	103	206	354	390	F10	16,3
RKV2-250	2	250	124	206	354	390	F10	20,3
RKV2-300	2	300	145	206	354	390	F10	24
RKV2-350	2	350	124	206	471	506	F10	28,5
RKV2-420	2	420	145	206	471	506	F10	32
RKV2-500	2	500	166	206	471	506	F10	35,5
RKV2-600	2	600	145	206	646	681	F10	43,5
RKV2-800	2	800	191	210	646	681	F10	58,5
RKV2-1000	2	1000	233	210	646	681	F10	72
RKV2-1200	2	1200	275	210	646	681	F10	84
RKV2-1500	2	1500	275	210	796	831	F10	105
RKV2-2000	2	2000	399	212	772	807	F10	156
RKV2-2500	2	2500	487	212	772	807	F10	185
RKV2-3000	2	3000	576	212	772	807	F10	220

Características


- Mejor rendimiento y resistencia a la temperatura.
- Mejor rendimiento de ciclo profundo.
- Mejor aceptación de la carga.
- Rendimiento superior a baja corriente.

Features


- Better performance and temperature resistance.
- Better performance deep cycle.
- Better charge acceptance.
- Superior performance at low current.

Características de desempeño Performance characteristics


CHARGE CHARACTERISTICS

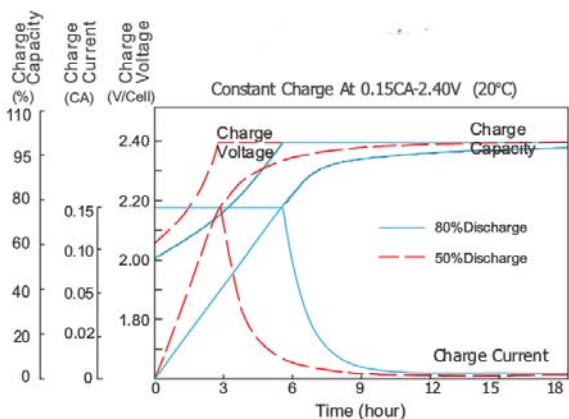


DISCHARGE CHARACTERISTICS 25°C

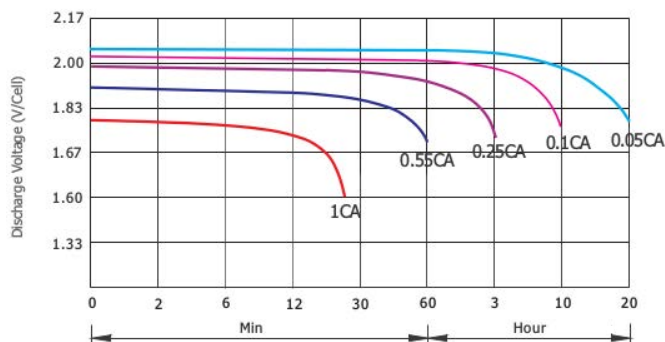

SELF DISCHARGE CHARACTERISTICS

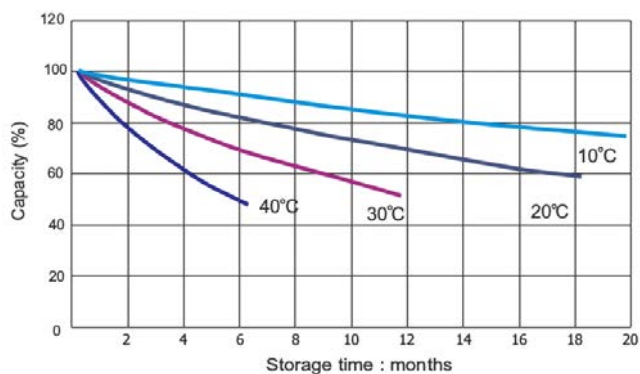

FLOAT VOLTAGE VS. FLOAT LIFE

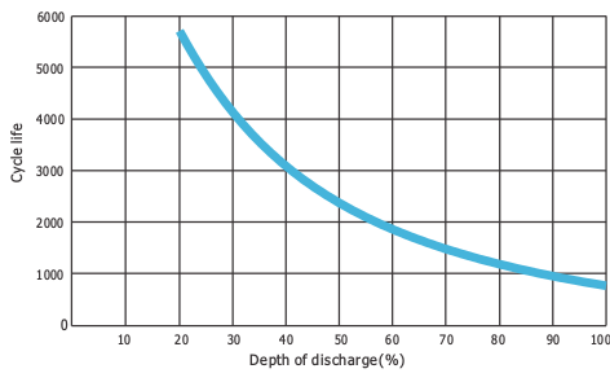

Certificaciones Certifications

Complied standards

- IEC 60896-21/22
- DIN40736
- IEC061427
- YD/T1360
- Eurobat guide, long life
- BS6290 part 4



ISO9001



ISO14001

