


HITOUCH 5

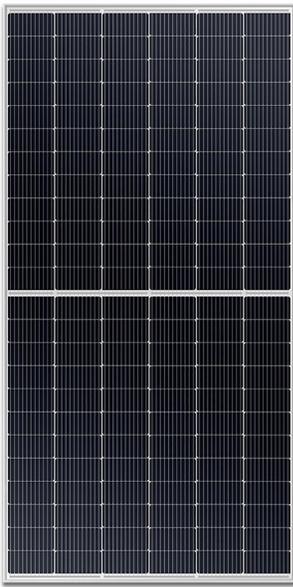

Product Model

CSP18-72HT

Power Range

530-545W



Higher Power Output

- Higher module conversion efficiency benefit from bigger wafer and half-cell structure.
- MBB(busbar) technology enhance stronger current collection with lower series resistance.
- Reduce losses of current mismatch.



Excellent Temperature Coefficient

- Higher power yield with lower operating temperature coefficient.
- Enables better output in hot weather conditions.
- Better performance in weak light conditions.



Higher reliability

- Positive loading 5400 Pa on front side and 2400 Pa loading on back side.
- Split-type junction box design to guarantee reliability and safety during project operation.
- Excellent anti-PID performance to guarantee safe and reliable operation in extreme weather condition.



Lower Hot Spot and Crack Risk

- Reduce hot-spot risk with optimized electrical design and lower operating current.
- crack risk limitation with help of MBB solar cell design.
- Better anti-shading performance.



Bifacial Value-added

- Bifacial module provide an additional 5%~25% output

BIFACIAL

High Efficiency

MBB

Multiple Busbar Technology

21.00%

Maximum Efficiency


12 YEARS

Hardware Warranty

Csunpower(CSP) is a world leading solar module manufacturer and comprehensive solar solution provider. We are specialized in high efficient solar module research, manufacturing and distribution to global market with advanced module production capacity available both in China and abroad. Founded in 2004, Headquartered in Nanjing, China. Till the end of 2020, we accumulatively shipped above 10GW solar modules to more than 50 countries, developed and built 500MW solar projects in Asia Pacific region.

Performance Warranty

12 Year Product Warranty · 30 Year Power Warranty

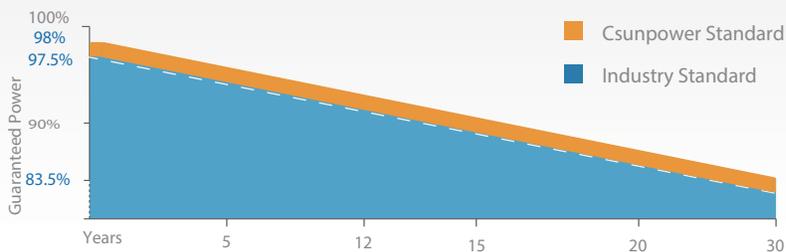

From the 2nd year to the 30th year, the average annual power decline will be no more than 0.5%.

Comprehensive Products and System Certificates



Electrical Performance (STC)

Maximum Power (Pmax)	530	535	540	545
Maximum Power Voltage (Vmp)	41.31	41.47	41.64	41.80
Maximum Power Current (Imp)	12.83	12.90	12.97	13.04
Open-circuit Voltage (Voc)	49.30	49.45	49.60	49.75
Short-circuit Current (Isc)	13.72	13.79	13.86	13.93
Module Efficiency(%)	20.5%	20.6%	20.8%	21.0%

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
 *Measuring tolerance: 0~+5W

Bifacial Output - Backside Power Gain

Maximum Power (Pmax)	567	572	578	583
Maximum Power Voltage (Vmp)	41.77	41.99	42.24	42.43
Maximum Power Current (Imp)	13.58	13.63	13.69	13.74
Open-circuit Voltage (Voc)	49.67	49.8	49.93	50.03
Short-circuit Current (Isc)	14.39	14.45	14.5	14.56

**Bifaciality=Pmax, rear/ Rated Pmax, front

Mechanical Data

Solar Cells	Monocrystalline (182mm)
Cell Orientation	144 [2 x (12 x 6)]
Module Dimensions	2285*1134*35 mm
Weight	31.5kg
Glass - Glass	2mm-2mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA / POE
Frame	35 mm (1.38 inches) Anodized Aluminium Alloy
J-Box	IP68
Output Cables (Including Connector)	4.0mm ² (0.006 inches ²), Length: Portrait 300mm(+)/ 300mm(-)
Connector	MC4 Compatible

Temperature Ratings

NMOT _(Nominal Module Operating Temperature)	45°C (±2°C)
Temperature Coefficient of Pmax	-0.35%/°C
Temperature Coefficient of Voc	-0.275%/°C
Temperature Coefficient of Isc	+0.045%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

Maximum Ratings

Operational Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Overcurrent Protection	30A
Bifaciality**	70% ± 10%


Warranty

12 year Product Workmanship Warranty
30 year Power Warranty


Packaging

Modules per box: 31 pieces
40' Container: 620 pieces

Dimensions of PV Module (Unit: mm)

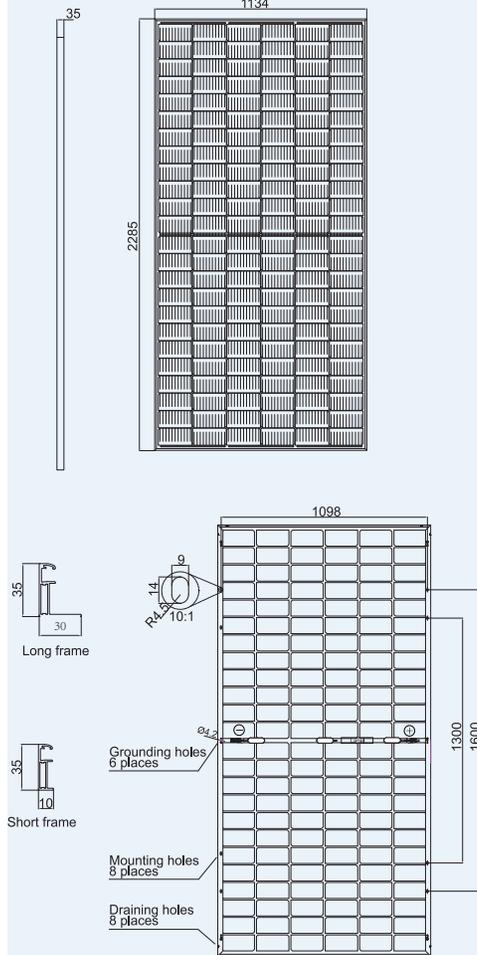

I-V Curves of PV Module (535W)



P-V Curves of PV Module (535W)

