



G1

Bifacial 120 cells (glass-glass type)

Power Output (STC): **350-370 Watt**
Max. Efficiency (STC): **21.38%**



High Mechanical Load

Certified to withstand high wind and snow loads up to 5400Pa



Enhanced Performances

Bifacial feature allows a power boost up to 20% vs monofacial



Lower LCOE

Higher power output over the long term increases projects ROI



Excellent Low-Light Performance

Tier 1 certified solar cells allows better performance in low-light environments



Ideal for Large Scale Installations

Lower installations time and BOS (Balance of Systems) costs




Salt Mist and Ammonia Resistant

Certified by Bureau Veritas to withstand usage near coastal environments




PID resistant

Designed to minimise cell degradation in extreme environments

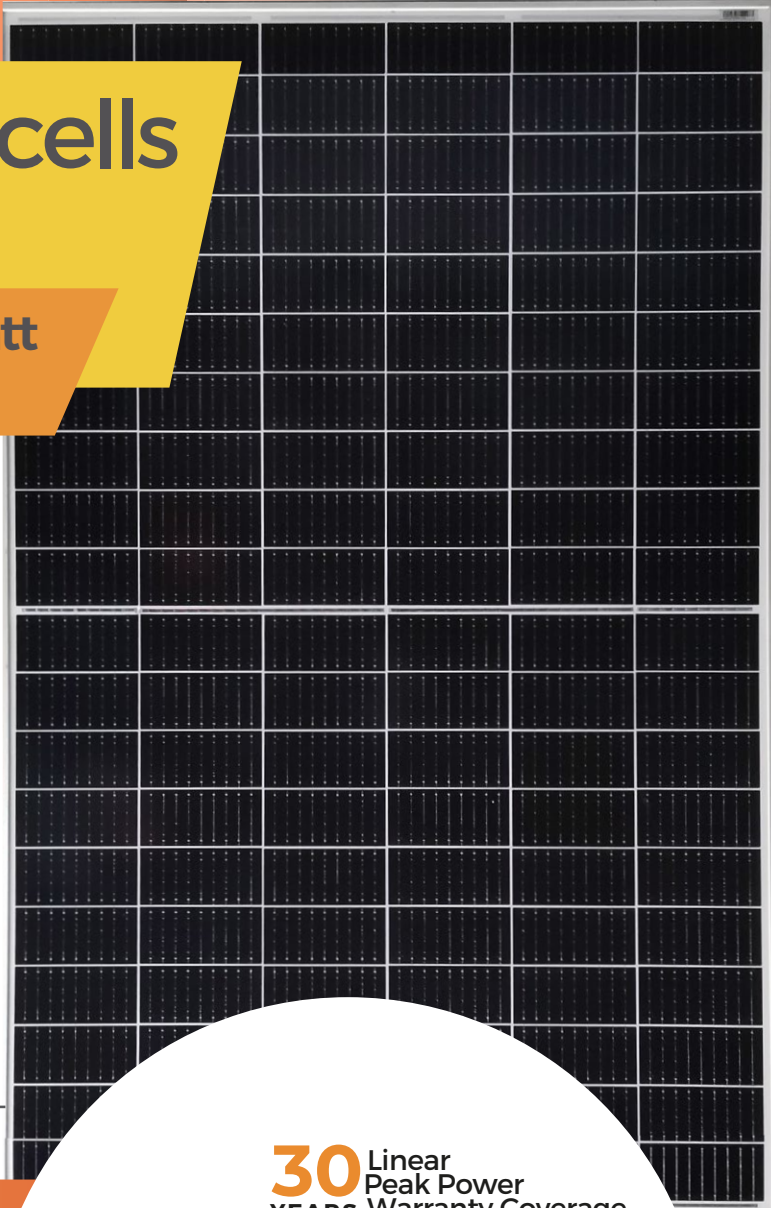

30 Linear Peak Power
YEARS Warranty Coverage

+25 Year Product Guarantee

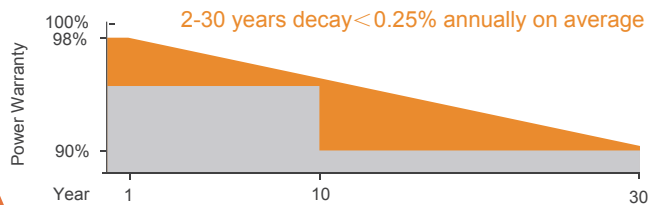

Secure Investment

Upsolar provides exceptional product coverage for all HJT modules to ensure our customers achieve superior long-term value from their solar installations. To further improve our product warranty, which covers unanticipated module damage, we've recently expanded our terms from a 12-year period to a 25-year period.

In addition, Upsolar offers a 30-year performance guarantee known as the Linear Module Warranty. Whereas traditional policies feature a single trigger point leading to drastic coverage reductions after just 12 years, Upsolar's coverage more accurately corresponds to system performance, providing coverage for over 25-years.

Overall, our goal is to deliver not only top-notch modules, but also peace of mind, for decades to come.

*Upsolar has expanded its manufacturing operations in Asia, Europe and North America, keeping its modules duty-free in the event of new CVD or AD policies. Please ask about pricing, payment terms and conditions to meet your needs.

Bifacial Series | Mono 6" 120 cells

Electrical Characteristics at STC

STC: Irradiance 1,000 W/m², Module temperature 25°C, AM=1.5

MODEL	UP-B350HH-G (60G1)	UP-B355HH-G (60G1)	UP-B360HH-G (60G1)	UP-B365HH-G (60G1)	UP-B370HH-G (60G1)
Max Power Pm at STC (Wp)	350	355	360	365	370
Max Power Voltage Vm (V)	37.20	37.50	37.80	38.11	38.43
Max Power Current Im (A)	9.41	9.47	9.53	9.58	9.63
Open-Circuit Voltage Voc (V)	44.20	44.50	44.80	45.10	45.40
Short-Circuit Current Isc (A)	10.10	10.15	10.21	10.26	10.31
Module Efficiency (STC)	20.22%	20.51%	20.81%	21.09%	21.38%
Bifacial Factor	0.70+/-0.05				

Bifacial Output-rearside Power Gain

5%	Max Power Pm (STC)	368	373	378	383	389
	Module Efficiency (STC)	21.23%	21.53%	21.84%	22.14%	22.44%
15%	Max Power Pm (STC)	403	408	414	420	426
	Module Efficiency (STC)	23.25%	23.58%	23.91%	24.25%	24.58%
25%	Max Power Pm (STC)	438	444	450	456	463
	Module Efficiency (STC)	25.27%	25.63%	25.99%	26.36%	26.72%

Components & Additional Data

Power tolerance	0/+3%
Front Glass	High Transparency Tempered Glass 0.078" // 2.0 mm
Junction Box	IP 67 or above
Output Cables	0.3m // IEC/ UL approved (4 mm ² , 12AWG) (PV Wire Type)
Connectors	MC4 compatible (IP67, IEC and UL approved)
Frame	Anodized aluminium alloy type 6063-T5
Encapsulation Material	EVA
Back Sheet	High Transparency Tempered Glass 0.078" // 2.0 mm
Temperature Range	-40°F to +185°F // -40°C to +85°C
Series fuse rating	20A
Maximum system voltage	1,500V (IEC/UL)


Specifications

Cells	HJT bifacial solar cells 158.75x79.38
Number of Cells	120 (6 x 20)
Dimensions (in // mm)	67.48 x 39.76 x 1.18 // 1714 x 1010 x 30
Weight (lb // kg)	49.4 // 22.4

Temperature Coefficients

NOCT (°C)	45 ± 2
Temperature Coefficients of Isc (% / °C)	0.05 ± 0.01
Temperature Coefficients of Voc (% / °C)	-0.22 ± 0.02
Temperature Coefficients of Im (% / °C)	-0.02 ± 0.02
Temperature Coefficients of Vm (% / °C)	-0.25 ± 0.03
Temperature Coefficients of Pm (% / °C)	-0.24 ± 0.05

IV Curves

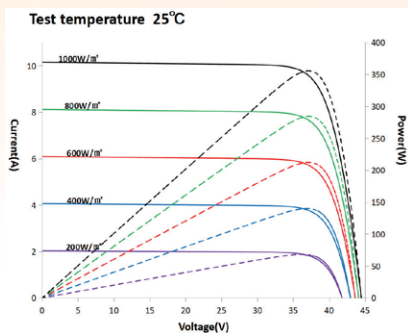

Options Available

- Frameless option available
- Transparent backsheet option available

