


Product
NEW
 最新产品

PERC157-MONO-5BB Solar Cells

技术规格 SPECIFICATION

转换效率 Efficiency(%)	最大功率 Pmpp(W)	最大电压 Umpp(V)	最大电流 Impp(A)	开路电压 Uoc(V)	短路电流 Isc(A)
22.3%-22.4%	5.451	0.581	9.378	0.679	9.829
22.2%	5.426	0.579	9.368	0.677	9.813
22.1%	5.402	0.579	9.326	0.675	9.798
22.0%	5.375	0.578	9.300	0.668	9.771
21.9%	5.351	0.578	9.258	0.666	9.742
21.8%	5.326	0.577	9.232	0.665	9.715
21.7%	5.302	0.576	9.202	0.664	9.675
21.6%	5.277	0.575	9.186	0.664	9.661
21.5%	5.253	0.572	9.181	0.663	9.657
21.4%	5.228	0.571	9.157	0.662	9.633
21.3%	5.204	0.569	9.149	0.659	9.611

产品图形 FEATURES

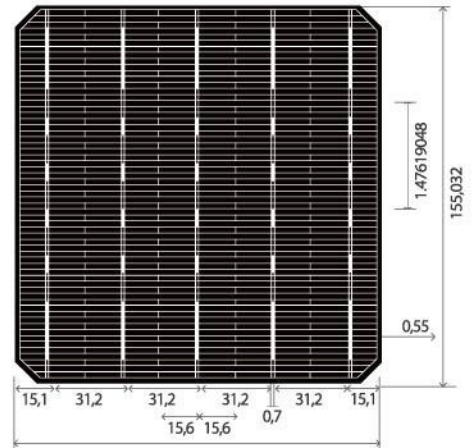

产品 Item	156.75mm 单晶高效电池片 156.75mm Mono PERC solar cells
尺寸 Dimensions	156.75mm × 156.75mm ± 0.5mm square wafers
厚度 Thickness	180um ± 20um
正面 Front	0.7mm 银浆主栅线和102 副栅线,氮化硅减反射膜 0.7 mm silver bus bar and 102 fingers, Silicon Nitride antireflection coating
背面 Back	背级分断1.6mm宽银浆,铝背场 1.6mm segmented soldering silver pads, Back surface field (aluminum)

