

RM-455W-166M/144

HIGH PERFORMANCE
MONOCRYSTALLINE PERC MODULE



Size:2094x1038x35mm
Cell:166mm

144CELL
Mono PERC Module


430-455Wp
Power Output Range

1500VDC
Maximum System Voltage

20.96%
Maximum Efficiency

LINEAR PERFORMANCE WARRANTY

10 year Product Warranty / 25 year Linear Power Warranty

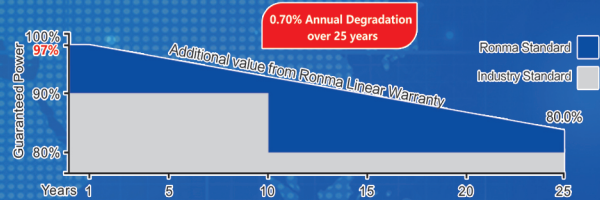

★ Please check the valid version of Limited Product Warranty which is officially released by Jiangsu Ronma Solar Co.,Ltd



KEY SALIENT FEATURES



Independently certified state-of-the-art automated manufacturing



Dual stage 100% EL Inspection warranting defect-free product



Industry leading lowest thermal co-efficient of power



Module Imp binning radically reduces string mismatch losses



Industry leading 12 years product warranty



Warranted reliability and stringent quality assurances well beyond certified requirements



Excellent low irradiance performance



Certified to withstand severe environmental conditions



Excellent PID resistance

- ♦ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
- ♦ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
- ♦ Excellent mechanical load 2400Pa & snow load 5400Pa resistance



Positive tight power tolerance

Jiangsu Ronma Solar Co., Ltd

Add: No. 1288, Qianjin West Road, Kunshan, Jiangsu, China.
Tel: +86 512 5766 6980

Shandong Ronma Solar Co., Ltd

Add: No.39, Weihe Road, Dongying Development Zone,
Dongying City, Shandong Province, China. P.C.: 257091
Tel: +86 546 7760978 +86 546 7760182

Web: www.ronmasolar.com


E-mail: sales@ronmasolar.com



RM-455W-166M/144



Dimensions of PV Module

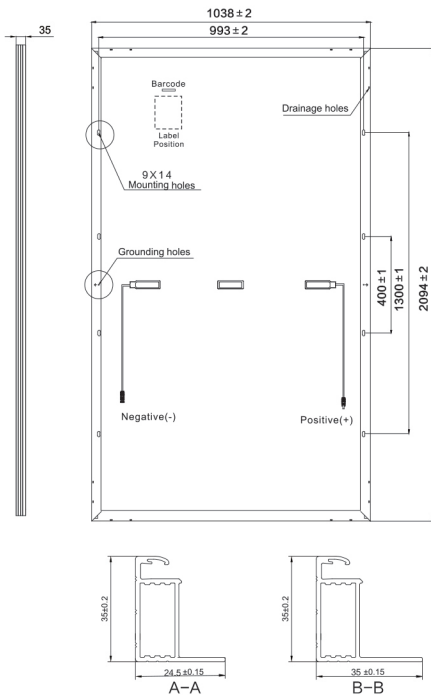

ELECTRICAL DATA (STC)

Model Number	RM-430W-166/144	RM-435W-166/144	RM-440W-166/144	RM-445W-166/144	RM-450W-166/144	RM-455W-166/144
Rated Power in Watts-Pmax(Wp)	430	435	440	445	450	455
Open Circuit Voltage-Voc(V)	48.70	49.00	49.20	49.40	49.60	49.80
Short Circuit Current-Isc(A)	11.23	11.31	11.39	11.46	11.53	11.61
Maximum Power Voltage-Vmpp(V)	40.30	40.50	40.70	40.80	41.00	41.20
Maximum Power Current-Impp(A)	10.67	10.74	10.82	10.90	10.98	11.06
Module Efficiency (%) *	19.78	20.01	20.26	20.46	20.71	20.96

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

* Module Efficiency (%): Round-off to the nearest number

MECHANICAL DATA



Solar cells	Monocrystalline
Cell size	166mmx166mm 9BB
Cell configuration	144 cells(6x12+6x12)
Module dimensions	2094X1038x35mm
Weight	24.5kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6063T5, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+)300mm, Negative(-)300mm (Connector Included)
Connector	ZJCV PV-CY03L,IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.35%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	30A

PACKAGING CONFIGURATION

	40ft(HQ)
Number of modules per container	660
Number of modules per pallet	30
Number of pallets per container	22
Packaging box dimensions (LxWxH) in mm	2120X1120x1190
Box gross weight[kg]	755

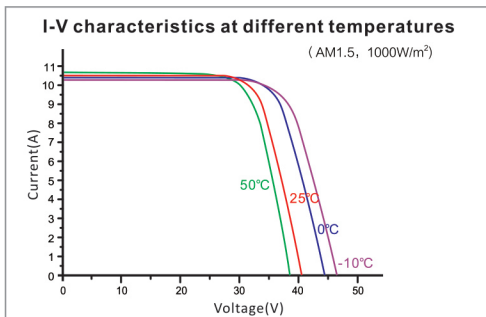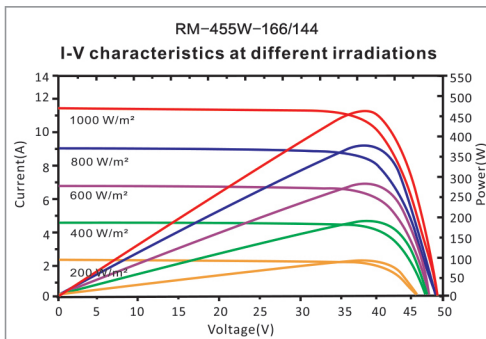

CAUTION:READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2020 Ronma Solar. All rights reserved. Specifications included in this datasheet are subject to change without notice.