

VSUN505-132BMH-DG

505W

Highest power output

21.30%


Module efficiency

12years

Material & Workmanship warranty

30years

Linear power output warranty

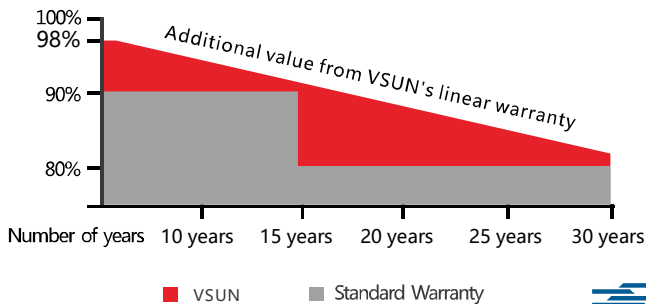

Munich RE


PERC MBB technology with Circular Ribbon

Higher output power

Half-cell Technology

Positive tolerance offer

VSUN505-132BMH-DG VSUN500-132BMH-DG
VSUN495-132BMH-DG VSUN490-132BMH-DG

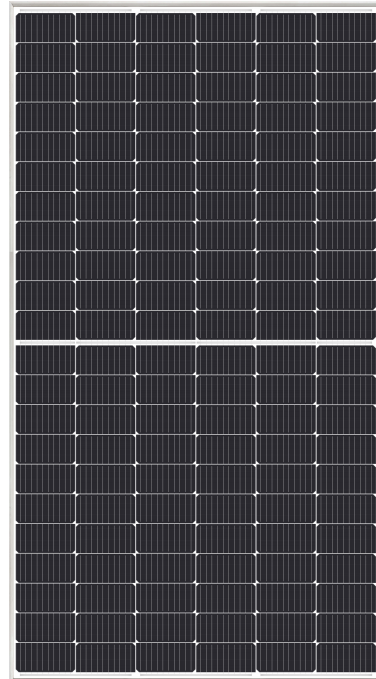

Lower risk of hot spot



Up to 30% extra power generation yield from the back side



Certified for salt/ammonia corrosion resistance



Load certificates: wind to 2400Pa and snow to 5400Pa



Lower LCOE

VSUN, a BNEF Tier-1 PV module manufacturer invested by Fuji Solar, has been committed to providing greener, cleaner and more intelligent renewable energy solutions. VSUN is dedicated to bringing reliable, customized and high-efficient products into various markets and customers worldwide



Engineered in Japan
www.vsun-solar.com

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN505-132BMH-DG	VSUN500-132BMH-DG	VSUN495-132BMH-DG	VSUN490-132BMH-DG
Maximum Power - Pmax (W)	505	500	495	490
Open Circuit Voltage - Voc (V)	45.6	45.4	45.2	45
Short Circuit Current - Isc (A)	14	13.93	13.85	13.78
Maximum Power Voltage - Vmpp (V)	38.6	38.4	38.2	38
Maximum Power Current - Imp (A)	13.09	13.03	12.96	12.9
Module Efficiency	21.30%	21.08%	20.87%	20.66%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics with different rear side power gain(reference to 500 front)

Pmax (W)	Voc (V)	Isc (A)	Vmpp (V)	Imp (A)	Pmax gain
525	45.4	14.63	38.4	13.68	5%
550	45.4	15.32	38.4	14.33	10%
599	45.5	16.72	38.3	15.64	20%
624	45.5	17.41	38.3	16.29	25%

Temperature Characteristics

NOCT	45°C(±2°C)
Voltage Temperature Coefficient	-0.27%/°C
Current Temperature Coefficient	+0.048%/°C
Power Temperature Coefficient	-0.32%/°C

Maximum Ratings

Maximum System Voltage [V]	1500
Series Fuse Rating [A]	30
Bifaciality	70%±10%

Material Characteristics

Dimensions	2093×1133×35mm (L×W×H)
Weight	30.0kg
Frame	Silver anodized aluminum profile
Front Glass	High transparency,Antireflection coated,Semi-toughened safety glass, 2.0mm
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate) or POE
Back Glass	Glazed & Semi-toughened safety glass, 2.0mm
Cells	12×11 pieces bifacial monocrystalline solar cells series strings
Junction Box	IP68, 3 diodes
Cable&Connector	Potrait: 500 mm (cable length can be customized) , 1×4 mm 2 , compatible with MC4

Packaging


Dimensions(L×W×H)	2120×1125×1253mm
Container 20'	150
Container 40'	330
Container 40'HC	660

System Design

Temperature Range	-40 °C to + 85 °C
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s
Maximum Surface Load	5,400 Pa
Application class	class A

Dimensions

Note:mm

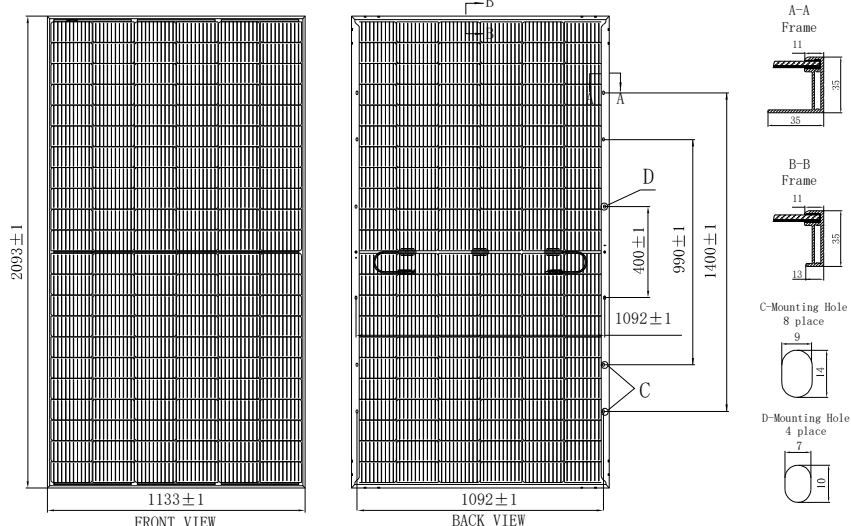

IV-Curves

