

MONOCRYSTALLINE SILICON | PHOTOVOLTAIC MODULES

260 W



About APS:



Australian Premium Solar (APS) is 100% Australian Owned managed and operated. APS supplies imported high quality renewable energy products Our solar panels are manufactured in accordance with APS's high standards of design and Quality Control Which ensure higher PV energy yields.

APS opened an advanced facility in Queensland, Australia for research and development and local testing of solar panels. The 2000 sq. mtr. facility is staffed by qualified engineers, who are dedicated to exploring ways to achieve the continuous improvement of our solar cells and solar modules.

12 Years Product Warranty* | 30 Years Performance Warranty*

91.2% Power Output Up To 12 Years | 80.7% Power Output Up To 30 Years

ISO 9001 : Quality Management System | CHUBB Insurance | PID Free

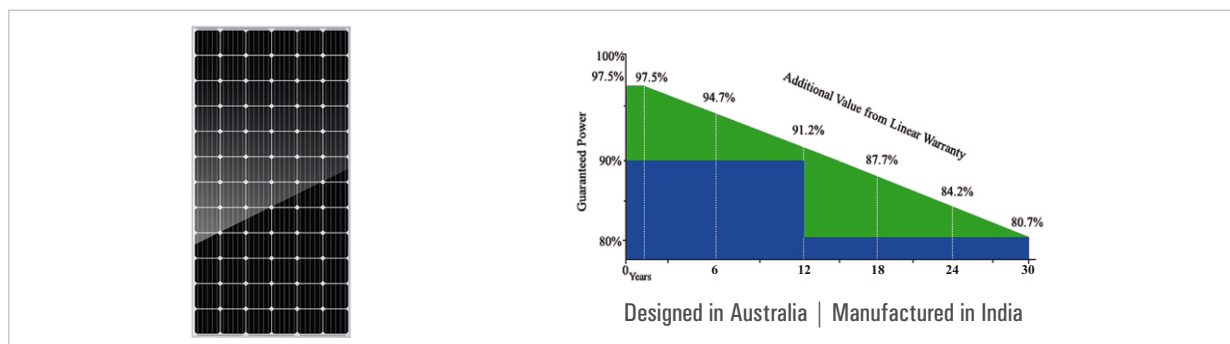

Australian Brand Manufactured in accordance with APS's high standards of design and Quality Control



Positive tolerance Positive tolerance of up to 5% delivers higher output reliability for our all modules.



High Model Output Highest conversion efficiency



EL Tested (ELECTRO LUMINESCENCE) 100% EL double inspection



Excellent module efficiency Solar cell efficiency up to 20%
Module efficiency up to 19.58%



High performance Higher PV Energy yields even under low light and cloudy conditions



Reliability Premium quality raw material and advanced manufacturing processes guarantees the reliability of our modules



PID resistant and free of snail trails
Increased module robustness to minimize micro-cracks



Web: www.australianpremiumsolar.co.in | Email: sales@australianpremiumsolar.co.in

ELECTRICAL TYPICAL VALUES

Model	APSM6-260/60
Maximum Power (Pmax)	260 W
Maximum Power Voltage (Vmp)	31.40 V
Maximum Power Current (Imp)	8.29 A
Open Circuit Voltage (Voc)	38.88 V
Short Circuit Current (Isc)	8.62 A
Tolerance	Positive only
Module Efficiency	16.01%

MECHANICAL CHARACTERISTICS

Dimensions	1640 x 990 x 35mm
Weight	18 kg


NOTE : STC: Irradiance 1000W/m² Module Temperature 25°C AM = 1.5

TEMPERATURE CHARACTERISTICS	
NOCT (Nominal Operation Temperature)	: 46 ± 2°C
Temperature Coefficient of Voc (β)	: -0.262%/°C
Temperature Coefficient of Isc (α)	: + 0.0039%/°C
Temperature Coefficient of Pmax (γ)	: -0.373%/°C


ABSOLUTE MAXIMUM RATING	
Parameter	Values
Operating Temperature	From -40° to 85°
Maximum Series Fuse Rating	15 A
IEC Application Class	IEC 61215, IEC 61730, IEC 61701, IEC 62804
Maximum System Voltage	1000v DC (IEC 61215) 600v (UL 1703)

MODULE CHARACTERISTICS	
Solar Cells	Mono
No. of Cells	60 Cells(10*6)
Glass	Low iron, tempered glass, 3.2mm
Frame	Anodized aluminum alloy
Junction Box	IP65/67 rated
Cable & Plug Connectors	1.1 x 4.0mm ² Mc4 compatible / IP 67
Maximum Snow Load	2400 Pascal
Maximum Wind Load	5400 Pascal
Hailstone Impact Test	80 km/h for 25mm ice ball

MODULE DIMENSION

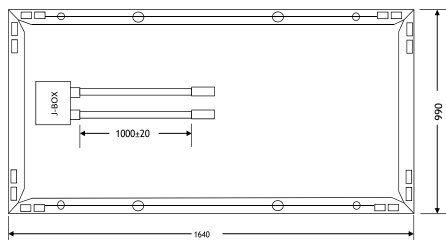

I-V CURVE

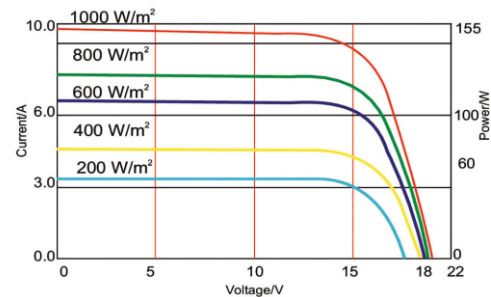

Note:

- The specifications in this datasheet are subject to change without any notice.
- The electrical data given here is for reference purpose only.
- Please contact our sales team for any customized solutions.
- Please read safety and installation instructions before using the product.
- Subject to Ahmedabad Jurisdiction.

*Warranty:

Please read APS India warranty documents thoroughly on <http://australianpremiumsolar.co.in/warranty/>

Corporate Office :

Australian Premium Solar (India) Pvt. Ltd.,
B-802, 8th Floor, Shapath Hexa, Nr. Sola Bridge,
Opp. Gujarat High Court, S. G. Highway,
Ahmedabad-380061. Gujarat (India).
M. : +91 76220 23259, +91 95121 00151
Email: sales@australianpremiumsolar.co.in
Web: www.australianpremiumsolar.co.in

Factory-1:

Australian Premium Solar (India) Pvt. Ltd.,
Plot No. 143, Road No. 4A, GIDC-Kathwada,
Ahmedabad-382430. Gujarat (India).

Factory-2:

Australian Premium Solar (India) Pvt. Ltd.,
At & Post - Tajpur, N.H.-08, Ta - Prantij,
Dist - Sabarkantha, Gujarat-383205 (India)

APS
AUSTRALIAN PREMIUM SOLAR
A Bright Alternative