


# 单晶 MONO 350-370W

AmSolar系列超高效半片电池组件，应用先进的半片电池技术，在降低内阻损耗的同时又降低了热斑风险，进一步提高了组件的发电效率。满足对品质和效率具有极致要求的客户。

AmSolar series (Super-efficiency half-cell Modules) Assembled with the advanced half-cell technology offer the advantages of higher power output, reduced series resistance loss, and lower risk of hot spot. In order to meet the Clients' requirements of best quality and efficiency.

## 120 cells 半片高效组件 Half-cut cell modules

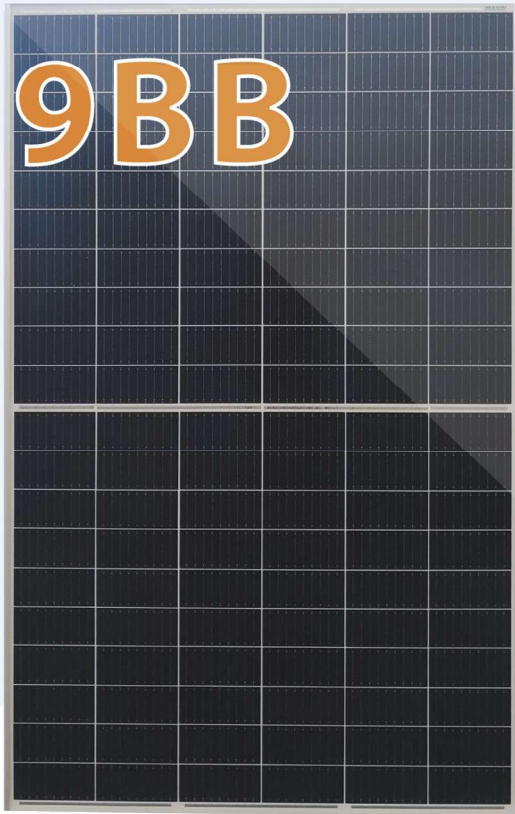

ISO9001:2015和ISO14001体系认证  
ISO9001:2015 & ISO14001 management systems



符合IEC61215和IEC61730质量标准  
IEC61215 & IEC61730 standard quality



优异的低辐照性能，更低的度电成本  
Superior low irradiance performance, Lower LCOE



最大抗风压：3800pa，最大抗雪载荷5400pa  
Wind load up to 3800Pa, Snow load up to 5400Pa



组件输出功率公差+5W  
0-5W positive power sorting



弱光照环境下的稳定表现  
Stable performance under weaklight conditions




25年产品功率保证，10年产品质量保证  
25-year power warranty, 10-year product warranty

### 认证 CERTIFICATION



### 线性质保 LINEAR PERFORMANCE WARRANTY

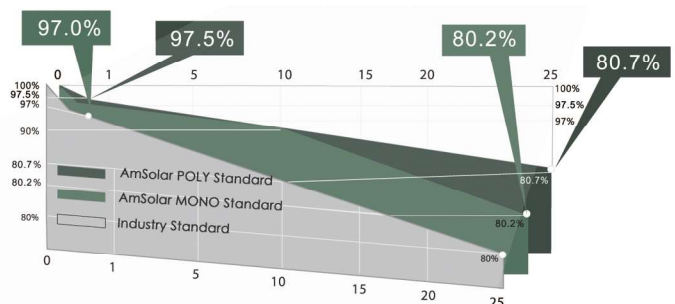


# 单晶 MONO 350-370W 120cells 9BB

ELECTRICAL PARAMETERS 电性能参数	FLSK-350M		FLSK-355M		FLSK-360M		FLSK-365M		FLSK-370M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power(Pmax) 峰值功率(Pmax/W)	350	259	355	262	360	265	365	268	370	271
Open Circuit Voltage(Voc) 开路电压(Voc/V)	40.38	37.23	40.59	37.34	40.79	37.45	40.99	37.55	41.18	37.66
Short Circuit Current(Isc) 短路电流(Isc/A)	11.02	8.89	11.10	8.95	11.18	9.01	11.26	9.07	11.34	9.13
Voltage at Maximum Power(Vmpp) 峰值功率电压(Vmpp/V)	33.27	30.69	33.49	30.82	33.71	30.96	33.92	31.09	34.13	31.22
Current at Maximum Power(Imp) 峰值功率电流(Imp/A)	10.52	8.44	10.60	8.50	10.68	8.56	10.76	8.62	10.84	8.68
Module Efficiency(%) 组件效率(%)	18.73		19.00		19.27		19.54		19.80	

标准测试条件(STC): 辐照度1000W/m<sup>2</sup>, 电池温度25°C, 光谱AM1.5G  
 标称电池工作温度(NOCT): 辐照度800W/m<sup>2</sup>, 环境温度20°C, 光谱AM1.5G, 风速1m/s

STC: Irradiance 1000W/m<sup>2</sup>, cell temperature 25°C, AM1.5G  
 NOCT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, AM1.5G, wind speed 1m/s

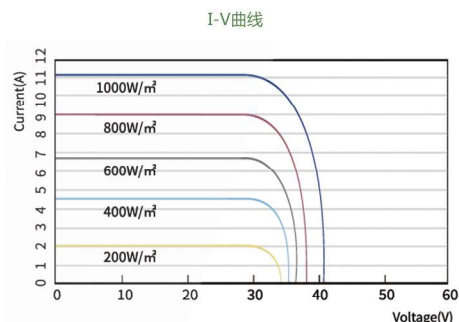

MAXIMUM RATINGS 极限参数	
Operating Module Temperature 工作环境温度	-40~+85°C
Maximum System Voltage 最大系统电压	1500V DC (IEC)
Maximum Series Fuse Rating 最大保险丝额定值	20A
Power Tolerance 功率公差	0/+5W

PACKAGING CONFIGURATION 包装方式		
Container 集装箱类型	20'GP	40'HQ
Pieces per pallet 每托组件数量	30	30
Pallets per container 每柜托盘数量	6	26
Pieces per container 每柜组件数量	180	780

TEMPERATURE RATINGS 温度额定值	
Nominal Operating Cell Temperature (Noct) 标称工作温度 (Noct)	45°C (±2°C)
Temperature Coefficient of Pmax 峰值功率温度系数	-0.36%/°C
Temperature Coefficient of Voc 开路电压温度系数	-0.28%/°C
Temperature Coefficient of Isc 短路电流温度系数	+0.05%/°C

MECHANICAL CHARACTERISTICS 机械参数		
Solar Cell 电池类型	单晶166*83毫米	MONO166*83mm
No. of Cell 电池数量	120 (6*20)	120 (6*20)
Dimensions 组件尺寸	1776*1052*35毫米	1776*1052*35mm
Weight 组件重量	22.0千克	22.0kgs
Front 正面	3.2毫米厚度钢化玻璃	3.2mm tempered glass
Frame 铝边框	阳极氧化铝合金	Anodized aluminium alloy
Junction Box 接线盒	IP68(3个旁路二极管)	Ip68 rated(3by pass diodes)
Output Cables 连接线缆	4.0平方毫米	4.0mm <sup>2</sup>
	线缆长度 900毫米	symmetrical length 900mm
Connectors 插接头	MC4兼容接插头	MC4 compatible
Mechanical load test 最大机械载荷	正面5400帕/背面2400帕	Front 5400Pa/Back 2400Pa

DIMENSIONS OF PV MODULE 组件尺寸

