
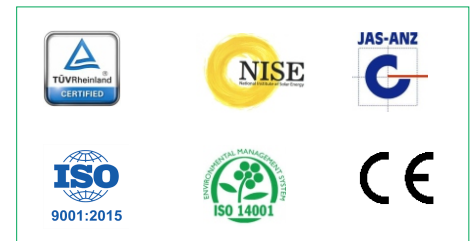


MICROTHRON SERIES

4BB SERIES

Model Type	EFS12100MC36
Electrical Data: at Standard test condition (STC)*	
Maximum power (P_{max})	100 W
Open circuit voltage (V_{oc})	22.32 V
Short circuit current (I_{sc})	5.88 A
Voltage at P_{max} (V_{mp})	18.1 V
Current at P_{max} (I_{mp})	5.54 A
Tolerance at P_{max}	$\pm 3\%$ Wp
Thermal Data:	
Temperature coefficient of V_{oc}	-0.36 %/K
Temperature coefficient of I_{sc}	0.06 %/K
Temperature coefficient of P_{max}	-0.43 %/K
Normal operating cell temperature	47 ± 2 °C
Mechanical Data:	
Cell type	Multi Crystalline
Solar cell per module	36
Module dimensions L x W x T, mm	1070 x 665 x 35
Mounting hole pitch (Y)	600 mm
Mounting hole pitch (X)	632mm
Mounting hole size (A)	12 x 8.5mm oblong holes at 4 places
Module weight, Kg	8.1
Module area, m ²	0.712
Junction box	3 terminal with 2 bypass diode
Front cover	3.2 Toughened textured low iron glass
Embedding	EVA (ethylene vinyl acetate)
Permissible operating conditions:	
Operating temperature range	-40 °C TO 85 °C
Maximum system voltage	1000 VDC
Application class	A
Warranty and Certifications	
Product Warranty	10 years on materials & workmanship
Performance Warranty	25 years linears power out put
Certifications	
IEC-61215, IEC61730, IEC61701- TUV Rheinland	

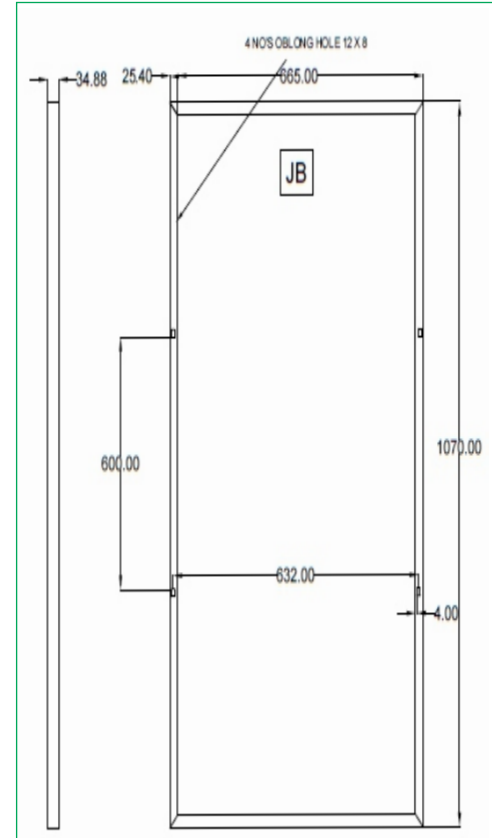

Notes:

* STC: 1000 W/m² irradiance, 25°C cell temperature, AM 1.5g spectrum according to EN 60904-3

The specifications and the key feature may deviate due to on going innovation, research and product enhancement. Enfros reserves the right to make any changes/modifications to the information described herein at any time without prior notice.
 Warranty - Please refer to "Enfros Solar Warranty" document for Terms & Conditions
 Certifications - IEC 61215 Ed. 2, IEC 61730, IEC 61701, CE

ENFROS TECHNOLOGIES PVT. LTD.

Plot No. 109, 1st Phase Harohalli Industrial Area, Kanakapura Taluk, Ramanagara District, Bangalore - 562 112. (KA, INDIA)

Mail to - info@enfros-solar.com, sales@enfros-solar.com

www.enfros-solar.com

Phone - +91 76249 56112, +91 96862 53007