


SP355P6-72 SERIES

Poly-crystalline 72Cells 330W-355W

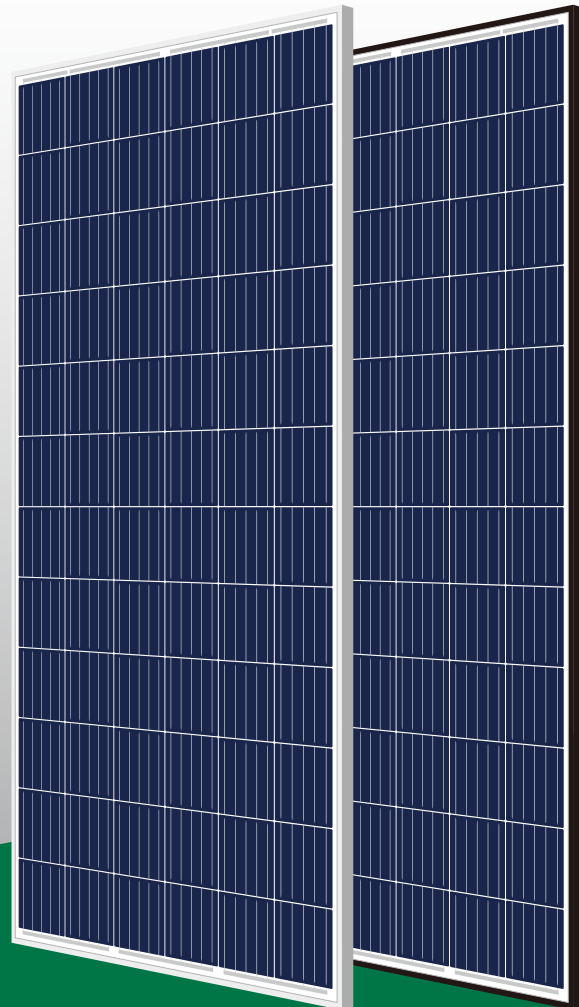

10

10-year product workmanship warranty

10

10-year guarantee for 90% rated power

25

25-year guarantee for 80% rated power



Excellent power generation performance

Guaranteed 0~+5W positive rated power tolerance ensures more power generation every day



Long weather resistance

Excellent anti-PID(Potential Induced Degradation) Certified in fireproofing for safety



Stable mechanical performance

Passed rigorous hail test
Withstands 5400Pa snow and 2400Pa wind loads



Lower temperature coefficient

Improved temperature coefficient decreases power loss in the high temperature application.



Low-light Performance

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



Superior quality control

ISO 9001:2015 Quality Management System
100% EL and appearance inspection

POLYCRYSTALLINE 72 CELLS SOLAR MODULE 330W-355W

ELECTRICAL DATA(STC)

Module	SP330P6-72	SP335P6-72	SP340P6-72	SP345P6-72	SP350P6-72	SP355P6-72
Peak Power Watts(Pmax/W)	330	335	340	345	350	355
Power Output Tolerance(W)	0 ~ +5					
Maximum Power Voltage(Vmp/V)	37.8	38.0	38.2	38.4	38.6	38.8
Maximum Power Current(Imp/A)	8.73	8.82	8.91	8.99	9.07	9.15
Open Circuit Voltage(Voc/V)	46.1	46.3	46.5	46.8	47.0	47.3
Short Circuit Current(Isc/A)	9.24	9.32	9.40	9.49	9.58	9.66
Module Efficiency(%)	17.0	17.2	17.5	17.7	18.0	18.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

*Measuring tolerance: ±3%.

ELECTRICAL DATA(NOCT)

Maximum Power(Pmax/W)	239	242	245	248	252	255
Maximum Power Voltage(Vmp)	34.6	34.7	34.8	34.9	35.1	35.3
Maximum Power Current(Imp)	6.91	6.98	7.05	7.12	7.18	7.25
Open Circuit Voltage(Voc)	41.3	42.5	42.6	42.8	43.0	43.3
Short Circuit Current(Isc)	7.49	7.55	7.61	7.68	7.75	7.82

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Polycrystalline 156.75 × 156.75 mm (6 inches)
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1960 × 992 × 40 mm (77.17 × 39.06 × 1.57 inches)
Weight	22.5 kg (49.6 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Silver / Black Anodized Aluminium Alloy
Junction Box	IP 67 or IP 68 rated
Cables	4.0mm ² 1200 mm (47.24 inches)
Connector	MC4

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C (±2°C)
Temperature Coefficient of Pmax	- 0.41%/°C
Temperature Coefficient of Voc	- 0.31%/°C
Temperature Coefficient of Isc	+0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1000V DC (IEC)
	1000V DC (UL)
Max Series Fuse Rating	15A

WARRANTY

10 year Product Workmanship Warranty

25 year Linear Power Warranty


(Please refer to product warranty for details)

PACKAGING CONFIGURATION


Modules per box: 27 pieces

Modules per 40' container: 648 pieces

DIMENSIONS OF PV MODULE(mm)

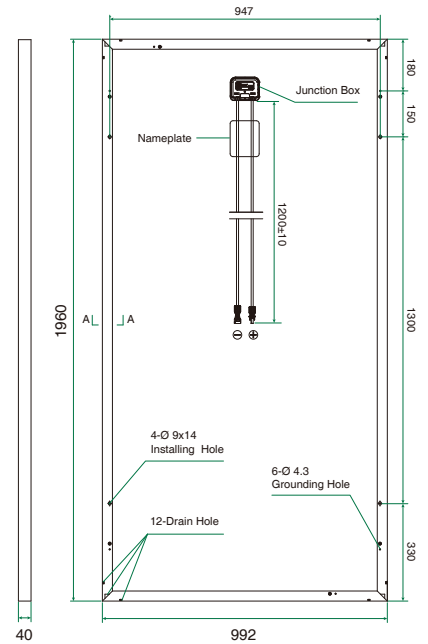


Back View



(A-A)

I-V CURVES OF PV MODULE(335W)

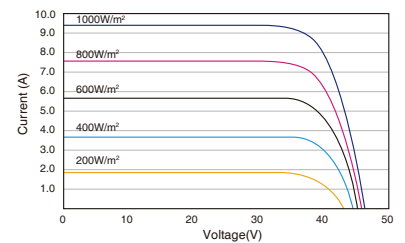

P-V CURVES OF PV MODULE(335W)

