



AOLI SOLAR


Monocrystalline Solar Cells

156.75mm 5BB



Eff (%)	Pmpp (W)	Ump (V)	Imp (A)	Uoc (V)	Isc (A)
22.40%	5.47	0.584	9.373	0.683	9.880
22.30%	5.45	0.582	9.356	0.682	9.863
22.20%	5.42	0.581	9.339	0.680	9.848
22.10%	5.40	0.579	9.322	0.679	9.832
22.00%	5.38	0.577	9.304	0.677	9.817
21.90%	5.35	0.576	9.288	0.675	9.803
21.80%	5.33	0.575	9.270	0.674	9.783
21.70%	5.30	0.574	9.259	0.673	9.777
21.60%	5.28	0.573	9.225	0.672	9.732
21.50%	5.25	0.572	9.193	0.671	9.702

Format	156.75x156.75mm±0.25mm
Thickness	170mm±30um
Front	5*0.7mm busbar(silver),108 fingers,blue silicon nitride anti-reflection coating(PID free)
Back	Back electrode width (silver) 1.8mm, back cover aluminum back field

IV CURVE

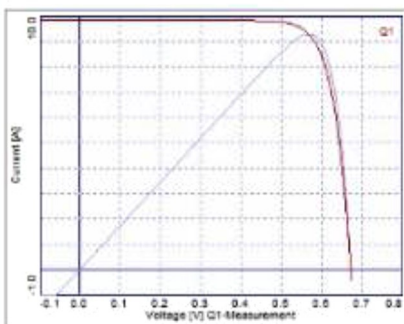

Intensity(W/m ²)	Uoc	Isc
1000	1.000	1.000
900	0.996	0.903
800	0.991	0.803
600	0.988	0.602
400	0.962	0.403

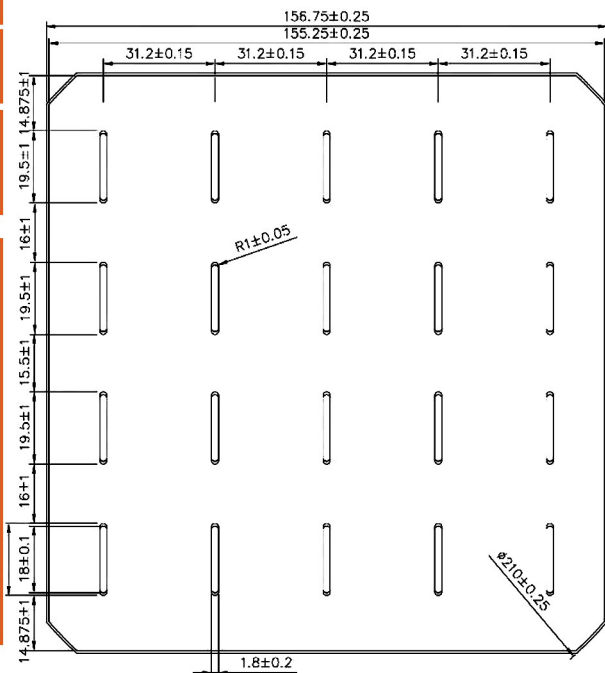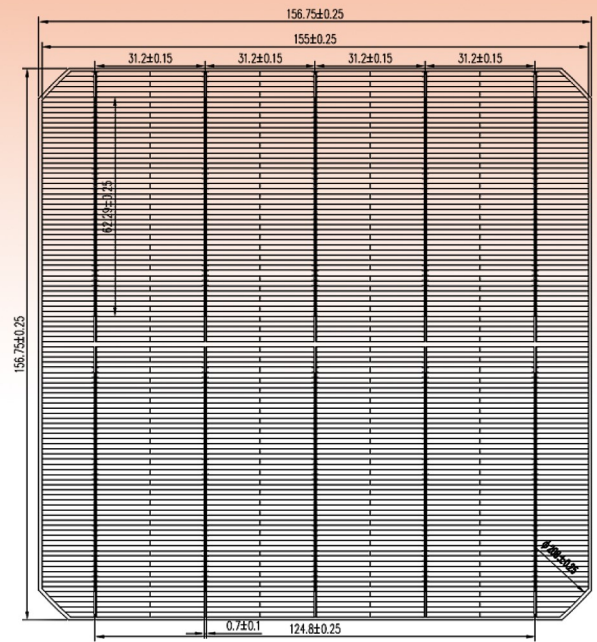

AOLI SOLAR WITH HIGH PERFORMANCE

www.aolisolar.com

Head Office:Rm 2506,Unit A ,Tianning Times Building,Changzhou City,JiangSu,China

Factory Add: C1 Buliding,Science & Technology Zone,Changzhou City,JiangSu,China

Email:info@aolisolar.com